


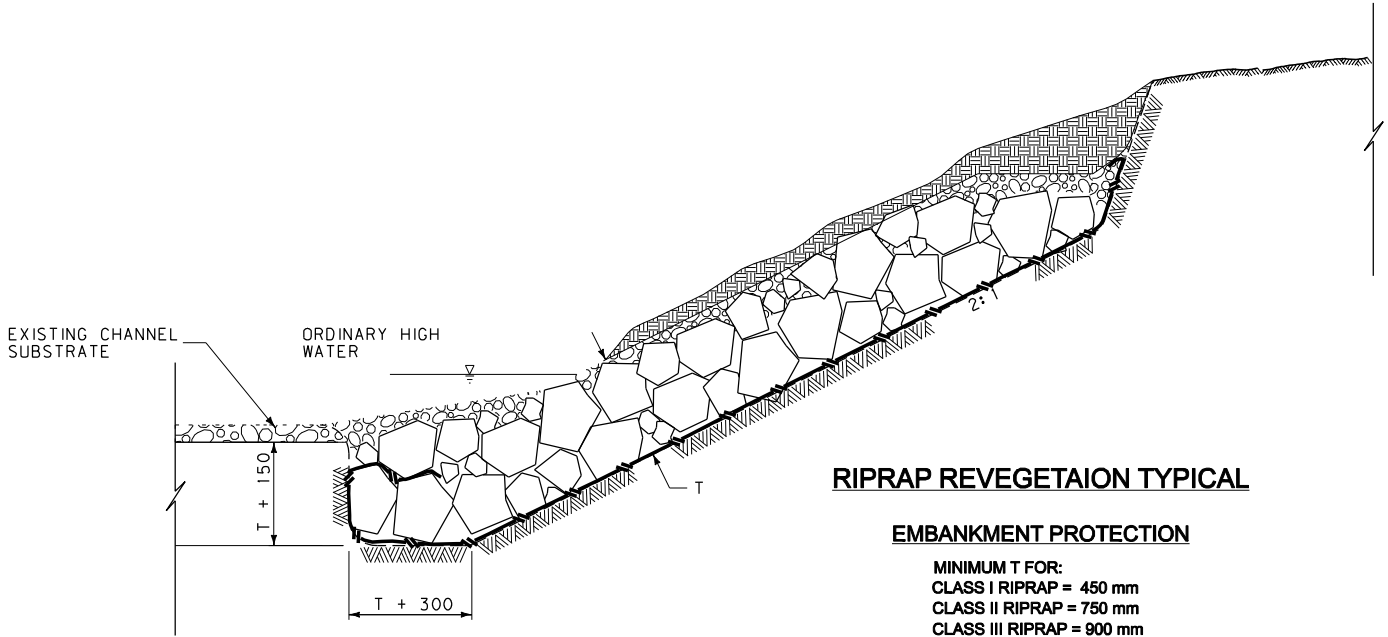

NOTES:

FILL RIPRAP VOIDS WITH FILTER MATERIAL NO. 2, OR A MATERIAL OF SIMILAR GRADATION OBTAINED ON SITE TO PROVIDE A UNIFORM SURFACE FOR THE PLACEMENT OF TOPSOIL. AS APPROVED BY THE ENGINEER.

PLACE TOPSOIL WITH A MINIMUM THICKNESS OF 200 mm. .

THIS DETAIL IS TO BE USED AS A VISUAL GUIDE FOR RIPRAP REVEGETATION. REFER TO THE PLAN SHEETS AND CROSS SECTIONS FOR SPECIFIC ELEVATIONS AND GEOMETRIC CONFIGURATION OF THE RIPRAP LAYOUT.

REFER TO THE SPECIAL PROVISIONS FOR PLANTING AND SEEDING SPECIFICATIONS.

LEGEND

TOPSOIL WITH MULCH COVER

RANDOM RIPRAP

FILTER MATERIAL NO. 2

EXISTING GROUND

PERMANENT EROSION CONTROL GEOTEXTILE

EXCAVATION NEAT LINE

RIPRAP REVEGETATION
DETAIL

PRELIMINARY