

---

# MONTANA DEPARTMENT OF TRANSPORTATION STATEWIDE WETLAND MITIGATION SITE MONITORING PROJECT

---

## EXECUTIVE SUMMARY – 2017 MONITORING RESULTS



*Prepared for:*




2701 Prospect Avenue  
Helena, Montana 59620

*Prepared by:*



820 North Montana Ave, Suite A  
Helena, Montana 59601

December 2017

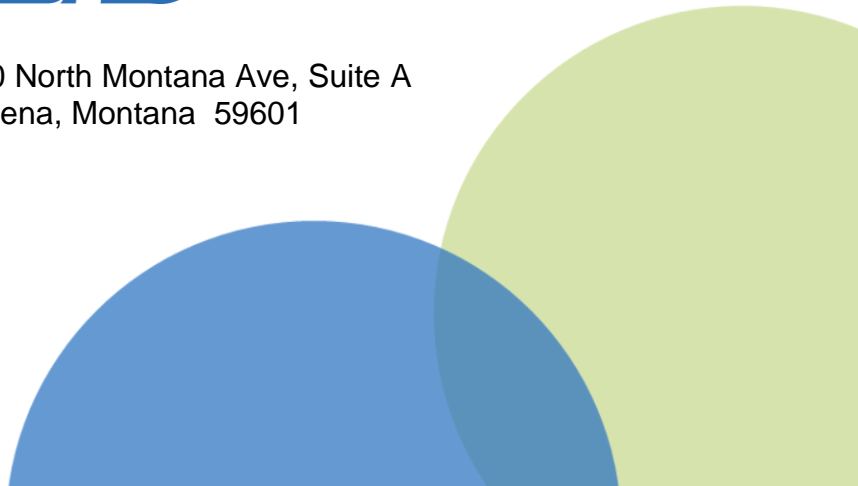

## TABLE OF CONTENTS

<b>1.0 INTRODUCTION</b> .....	<b>1</b>
<b>2.0 INDIVIDUAL MITIGATION SITE DISCUSSIONS</b> .....	<b>4</b>
2.1 BIG MUDDY (GLENDDIVE DISTRICT, YEAR 7).....	4
2.2 EASTON RANCH (BUTTE DISTRICT, YEAR 8).....	14
2.3 FORSYTH NORTHWEST (4 SITES) .....	24
2.3.1 Forsyth Northwest – East (Glendive District, Year 5) .....	24
2.3.2 Forsyth Northwest – Middle (Glendive District, Year 5) .....	26
2.3.3 Forsyth Northwest – Treasure County Line (Glendive District, Year 5).....	28
2.3.4 Forsyth Northwest – West (Glendive District, Year 5) .....	30
2.4 FORT PECK – NORTHEAST (GLENDDIVE DISTRICT, YEAR 1).....	32
2.5 JTX – TUNNICLIFF RANCH (BILLINGS DISTRICT, YEAR 2).....	36
2.6 KINDSFATER WETLAND (BILLINGS DISTRICT, YEAR 5) .....	39
2.7 MCGINNIS MEADOWS (MISSOULA DISTRICT, YEAR 8) .....	45
2.8 ROSTAD RANCH (BUTTE DISTRICT, YEAR 5).....	57
2.9 SCHRIEBER LAKE (MISSOULA DISTRICT, YEAR 3) .....	63
2.10 SCHRIEBER MEADOWS (MISSOULA DISTRICT, YEAR 7) .....	73
2.11 SILICON MOUNTAIN (BUTTE DISTRICT, YEAR 3).....	85
2.11.1 Wetland Mitigation Credits.....	86
2.11.2 Stream Mitigation Credit .....	86
2.12 US 93 NORTH – PETERSON (MISSOULA DISTRICT, YEAR 9).....	92
<b>3.0 REFERENCES</b> .....	<b>97</b>
<b>APPENDIX A. SUMMARY INFORMATION FOR MDT WETLAND MITIGATION SITES</b> .....	<b>A-1</b>

## LIST OF FIGURES

FIGURE	PAGE
1-1 Location Map for All 13 Montana Department of Transportation Mitigation Sites Monitored in 2017.....	2

## LIST OF TABLES

TABLE	PAGE
1-1 Summary of Current Mitigation Wetland Site Monitoring Site Parameters.....	3
2-1 Summary of Wetland Credits From 2011 Through 2017 at the Big Muddy Site .....	6
2-2 Wetland Crediting and Performance Standard Summary for the Original Big Muddy Creek Site.....	8
2-3 Summary of Performance Standards for Big Muddy Credit Areas .....	10
2-4 Functions and Values of the Big Muddy Site From 2011 Through 2017 .....	11

## LIST OF TABLES (continued)

TABLE	PAGE
2-5 Credit Summary From 2010 Through 2017 for the Easton Ranch Site.....	15
2-6 Montana Wetland Assessment Method Summary for the Easton Ranch Site From 2010 Through 2017 .....	17
2-7 Summary of Mitigation Goals for Easton Ranch Wetland Mitigation Site.....	20
2-8 Summary of Performance Standards and Success Criteria for Easton Ranch Wetland Mitigation Site.....	22
2-9 Estimated Credit Summary for the Forsyth Northwest – East Wetland Mitigation Site ....	25
2-10 Montana Wetland Assessment Method Summary for the Forsyth Northwest – East Site From 2013 Through 2017 .....	26
2-11 Credit Summary for the Forsyth Northwest – Middle Site.....	27
2-12 Montana Wetland Assessment Method Summary for the Forsyth Northwest – Middle Site From 2013 Through 2017 .....	28
2-13 Credit Summary for the Forsyth Northwest – Treasure County Line Site .....	29
2-14 Montana Wetland Assessment Method Summary for the Forsyth Northwest – Treasure County Line Site From 2013 Through 2017.....	29
2-15 Credit Summary for the Forsyth Northwest – West Site .....	30
2-16 Montana Wetland Assessment Method Summary for the Forsyth Northwest – West Site From 2013 Through 2017 .....	31
2-17 Wetland Mitigation Credits Estimated for the Fort Peck – Northeast Site in 2017 .....	33
2-18 Functions and Values of the Fort Peck – Northeast Site in 2017 .....	34
2-19 Summary of Performance Standards and Success Criteria for the Fort Peck Northeast Site .....	35
2-20 Wetland Credit Determination for the JTX – Tunnick Ranch Site.....	36
2-21 Wetland Mitigation Credits Estimated for the JTX – Tunnick Ranch Site in 2016 and 2017.....	38
2-22 Montana Wetland Assessment Method Summary for the JTX – Tunnick Ranch Site in 2017 .....	39
2-23 Wetland Mitigation Credits Estimated for the Kindsfater Site From 2014 Through 2017 .....	41
2-24 Functions and Values of the Kindsfater Site From 2013 Through 2017 .....	42
2-25 Summary of Performance Standards and Success Criteria Compared to Existing Site Conditions.....	44
2-26 Summary of Wetland Credits at the McGinnis Meadows Site From 2011 Through 2017 .....	47
2-27 Functions and Values at the McGinnis Meadows Site From 2010 Through 2017 .....	49
2-28 Summary of Performance Standards and Success Criteria Compared to Existing Site Conditions.....	55

## LIST OF TABLES (continued)

TABLE	PAGE
2-29 Summary of Wetland Credits at the Rostad Ranch Site From 2014 Through 2017.....	59
2-30 Functions and Values of the Rostad Ranch Site From 2004 and 2013 Through 2017....	60
2-31 Summary of Performance Standards and Success Criteria .....	61
2-32 Summary of Wetland Credits at the Schrieber Lake Site 2015–2017 .....	66
2-33 Anticipated Riparian and Stream Credits Generated From the Schrieber Lake Site .....	67
2-34 Functions and Values of the Schrieber Lake Site From 2015 to 2017 .....	68
2-35 Summary of Performance Standards and Success Criteria at the Schrieber Lake Site in 2017.....	69
2-36 Summary of Wetland Mitigation Credits at the Schrieber Meadows Mitigation Site From 2013 Through 2017 .....	75
2-37 Determination of Riparian Mitigation Credits for Schrieber Meadows .....	77
2-38 Determination of Stream Mitigation Credits for Schrieber Meadows.....	78
2-39 Functions and Values at the Schrieber Meadows Site From 2010 and From 2012 Through 2017.....	79
2-40 Summary of Performance Standards and Success Criteria at Schrieber Meadows in 2017.....	83
2-41 Wetland Mitigation Credits Estimated for the Silicon Mountain Mitigation Site From 2015 Through 2017 .....	87
2-42 Summary of Anticipated Stream Mitigation Credits From the Silicon Mountain Mitigation Project .....	88
2-43 Functions and Values of the Silicon Mountain Site From 2015 Through 2017 .....	89
2-44 Summary of Performance Standards and Success Criteria at the Silicon Mountain Site in 2017.....	91
2-45 Credit Summary for the Peterson Site .....	94
2-46 Summary of 2004 (Baseline), 2008 Through 2011, and 2013 Through 2017 Wetland Function/Value Ratings and Functional Points at the Peterson Site.....	95

## LIST OF APPENDICES

<b>APPENDIX A. SUMMARY INFORMATION FOR MDT WETLAND MITIGATION SITES .....</b>	<b>A-1</b>
---	------------

Cover: View looking east at Schrieber Lake site (photograph by Larry Urban, Montana Department of Transportation).

## 1.0 INTRODUCTION

This document summarizes the results of the 2017 monitoring efforts at 12 wetland mitigation projects located throughout Montana that were constructed by or for the Montana Department of Transportation (MDT). Full monitoring reports for each of these sites were prepared and presented to MDT in December 2017. The Forsyth Northwest project consisted of four sites. The following mitigation sites were monitored in 2017, and their locations are shown on Figure 1-1:



- Big Muddy
- Easton Ranch
- Forsyth Northwest
- JTX – Tunnicliff
- Kindsfater Wetland
- McGinnis Meadows
- Fort Peck Northeast
- Rostad Ranch
- Schrieber Lake
- Schrieber Meadows
- Silicon Mountain
- US 93 North Peterson

Monitoring activities were conducted by RESPEC wetlands personnel under contract to MDT during the months of June, July, and August 2017 in accordance with the US Army Corps of Engineers (USACE) wetland standards and MDT wetland mitigation site monitoring protocols. Activities conducted and information collected included wetland delineation, wetland boundaries, vegetation community mapping, vegetation transects, soils and hydrology data, wildlife observations, photograph points, functional assessments, stream cross-sectional surveys, and nonengineering examination of constructed features. Monitoring methods are discussed at length in the individual site monitoring reports and are not presented in detail in this summary.

For all of the MDT monitoring events performed before 2008, wetland delineation was conducted according to the 1987 *Corps of Engineers Wetlands Delineation Manual* (1987 Wetland Manual) [Environmental Laboratory, 1987]. In 2008, the USACE released regional supplements that modified the 1987 wetland delineation method for the Great Plains (GP) and Western Mountain Valleys and Coast (WMVC) regions of Montana. At that time, the USACE determined that the original 1987 Wetland Manual's methodology should continue to be used for the monitoring period of those MDT wetland mitigation sites for which the original 1987 method had been used to establish baseline wetland conditions.

In 2010, updates to the regional supplements for the GP and WMVC regions were released by the USACE. These most recent regional supplements were used to evaluate the mitigation wetland projects that were constructed during or after 2008. Sites that were evaluated using the WMVC supplement included Easton Ranch, McGinnis Meadows, US93 North – Peterson, Schrieber Lake, Schrieber Meadows, and Silicon Mountain. Sites that were evaluated with the GP version included Big Muddy, Forsyth Northwest (FNW), JTX – Tunnicliff, Kindsfater, Fort Peck Northeast, and Rostad Ranch.

# 2017 MDT Statewide Wetland Mitigation Sites

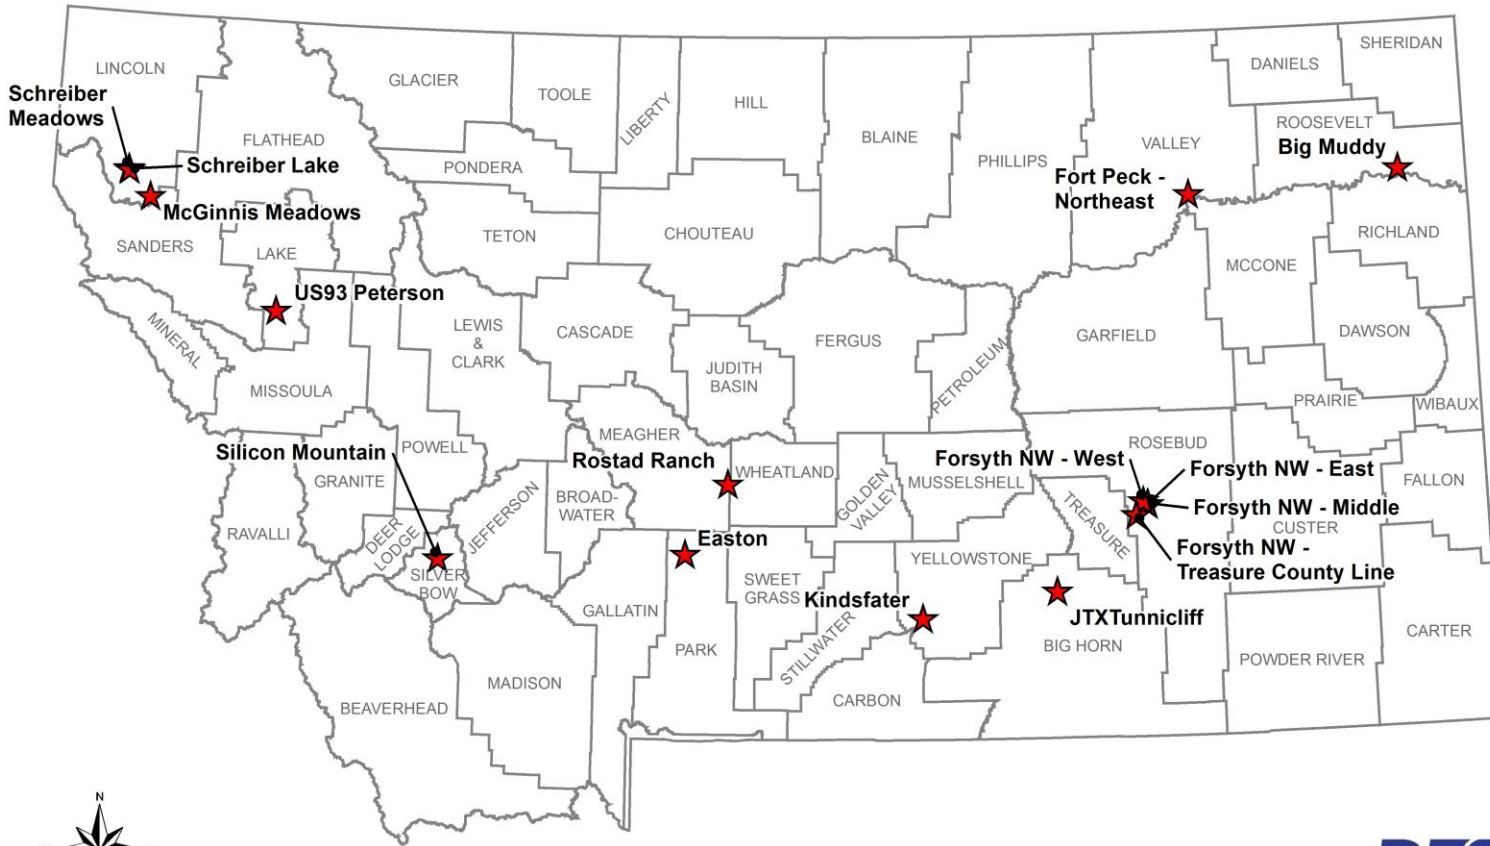

**RESPEC**

820 North Montana Ave.,  
Suite A  
Helena, MT 59601

Figure 1-1. Location Map for All 13 Montana Department of Transportation Mitigation Sites Monitored in 2017.

Similarly, the methodology that is used to assess wetland function and values has evolved over time. From 2001 to 2007, wetland functional assessments were conducted at all of the monitoring sites using the 1999 MDT Montana Wetland Assessment Method (MWAM). In 2008, use of the 1999 method was discontinued for most projects because the 2008 MWAM became available and was applied. Use of the 1999 method was continued at sites for which baseline conditions were established using that method and for which functional assessment using that version of the method was integrated into the project's credit calculation. Projects that meet those criteria and continue to use the 1999 MWAM version include US 93 Peterson. All other projects summarized here were evaluated for wetland function and values by using the 2008 MDT MWAM method. Table 1-1 presents a summary of the monitoring methods used for each site, along with their total project area.

**Table 1-1. Summary of Current Mitigation Wetland Site Monitoring Site Parameters**

Project Site	Total Acres	USACE Delineation Method	MWAM Method
<b>Missoula District</b>			
US 93 North – Peterson	25.0	1987 (WMVC)	1999
McGinnis Meadows – Libby	32.7	WMVC	2008
Schrieber Meadows – Libby	59.6	WMVC	2008
Schrieber Lake - Libby	104.7	WMVC	2008
<b>Butte District</b>			
Easton – Wilsall	33.5	WMVC	2008
Rostad Ranch	67.0	GP	2008
Silicon Mountain - Silver Bow	50.1	WMVC	2008
<b>Glendive District</b>			
Fort Peck - Northeast	4.5	GP	2008
Big Muddy – Culbertson	17.9	GP	2008
Forsyth NW – East	2.7	GP	2008
Forsyth NW – Middle	1.8	GP	2008
Forsyth NW – West	13.7	GP	2008
Forsyth NW-Treasure Co Line	5.9	GP	2008
<b>Billings District</b>			
JTX – Tunnickliff	50	GP	2008
Kindsfater Wetland	138	GP	2008

Monitoring summaries for all of the mitigation sites investigated in 2017 are presented in alphabetical order in Chapter 2.0. Each discussion section includes a summary of site history and objectives, delineation, crediting, functional assessment results, and maintenance and other recommendations, where applicable.

Appendix A provides the following for each monitoring site: the site name, MDT District, year constructed, major Montana watershed basin, pre-project wetland acreage and functional assessment category, target wetland credit, 2017 wetland acreage and functional assessment category, upland buffer acreage, total credit acreage and functional units as of 2017, and general site comments.

## 2.0 INDIVIDUAL MITIGATION SITE DISCUSSIONS

### 2.1 BIG MUDDY (GLEN DIVE DISTRICT, YEAR 7)

The Big Muddy Creek Wetland Mitigation Project is located 4 miles west of Culbertson, along US Highway 2, in Section 21, Township 28 North, Range 55 East, Roosevelt County, Montana. This project is situated within Watershed #12 – the Lower Missouri River Basin. Wetlands that were developed at this location were intended to provide compensatory mitigation for wetland impacts associated with transportation improvement projects in the Glendive District, including Brockton-East and Big Muddy-West.

MDT initiated a feasibility study in August 2009 with the baseline delineation and Montana Wetland Assessment completed in 2010; approximately 0.73 acre of existing wetlands was found within the project boundary. Those wetlands encompassed an inundated, emergent marsh that extended from the banks of an unnamed tributary to Big Muddy Creek and a narrow emergent wet meadow that extended into upland habitat from the marsh.

The initial construction work on this site was completed in spring 2011 with the intention of creating 6.53 acres of emergent/aquatic bed shallow marsh within three wetland cells on 10.62 acres located on the north side of US Highway 2. The cells were to be excavated to intersect groundwater and provide water depths that ranged from 0.5 to 2 feet. Additional wetland hydrology was to be provided by direct precipitation and snowmelt.

In 2012, the overall size of the wetland mitigation site was increased to provide compensatory mitigation for unavoidable impacts associated with the MDT Brockton – East project. An additional 7.25 acres of mitigation area were added on the south side of US Highway 2 and included constructing a 5.47-acre wetland depression along the floodplain of an unnamed tributary to Big Muddy Creek in an area previously delineated as upland. A 1.83-acre preexisting wetland was located in the southern project area adjacent to the excavated depression and has been included in the preservation category for crediting purposes. The total mitigation area monitored across the northern and southern mitigation project parcels since 2012 was approximately 17.9 acres. The mitigation goals were to create and preserve wetland habitat functions associated with rangeland located adjacent to the Big Muddy Creek tributary. The project objectives include the following:

- Maximize the development of emergent and aquatic bed wetlands, general wildlife habitat, short- and long-term surface-water storage, sediment/nutrient/toxicant removal, and production export/food chain support
- Create up to 14.8 acres of wetland
- Preserve approximately 2.56 acres of wetland through permanent protection and weed management
- Preserve a protected, managed 0.43-acre upland buffer adjacent to wetlands in the parcel north of US Highway 2
- Minimize site operation and maintenance requirements.



Table 2-1 provides a breakdown of the credit acreages (based on the 2017 delineation) listed for each category scaled according to the credit criteria listed in Table 2-2. Table 2-1 summarizes the originally proposed mitigation acreages credit ratios and scaled performance standards from the May 2011 Mitigation Plan. This table was modified in 2012 to include the additional acreages monitored within the southern parcel. Table 2-3 presents a summary of the site's progress in relation to the established performance standards. Each mitigation category has been divided into the respective parcels, northern or southern. The total credit acres accrued at the Big Muddy wetland mitigation area in 2017 was 12.95 acres, which is an increase of 1.62 credit acres since 2014.

Within the northern parcel, the number of acres of created wetland within the excavated areas between cells and passive creation was 1.63 in 2017. Based on meeting Standards 1 through 3, 100 percent of the total created acreage was credited and totaled 1.63. The area between the excavated cells within the northern parcel exhibited greater than 70 percent cover by hydrophytic vegetation, less than 20 percent bare ground, and no noxious weeds. Wetland creation within the excavated cells in the northern parcel remained consistent from 2012 through 2017, which totaled 5.76 acres. The estimated credit acreage was 100 percent of the total possible, or 5.76 credit acres based on the scaled criteria for meeting Standards 1, 2, and 3. The absolute cover of hydrophytic vegetation within the excavated wetland cells achieved 70 percent cover in 2017 with noxious weed cover observed at less than 5 percent. Preservation of 0.73 acre in the north parcel has been credited 100 percent at a 4:1 ratio providing 0.18 credits based on continued delineation as wetland habitat and noxious weed absolute cover less than 5 percent.

Wetland creation within the southern parcel totaled 4.17 acres in 2017, the same as 2016. Similar to the north mitigation area, 100 percent of wetland credits were allocated for meeting Standards 1 through 3. Wetlands that were created in the southern parcel satisfy the criteria for wetland hydrology, hydric soils, and hydrophytic vegetation. Estimated vegetation cover within this excavated basin is approximately 95 percent with 5 percent bare ground. No noxious weeds were identified within the created wetland. Wetland preservation within the southern parcel totaled 1.83 acres and provided 0.46 credit. The three performance standards for the preservation wetland have been met since 2012. The preservation wetland within the southern parcel continues to satisfy wetland hydrology, hydric soils, and hydrophytic vegetation criteria, absolute cover of FAC or wetter plants is estimated at nearly 100 percent, and less than 5 percent noxious weed cover has been identified. Maintaining the upland buffer around the southern parcel generated an additional 0.25 credit in 2013 through 2017. Full credit at a 5:1 ratio was attained by meeting the success criteria for noxious weed cover below 5 percent within the upland buffer.

The 2008 MWAM was used in the May 2011 Mitigation Plan to evaluate 8 acres of the existing riverine wetland associated with the tributary to Big Muddy Creek and 2 acres of the remnant wet meadow located north and south of the mitigation site. Both assessment areas (AAs) extended outside the current project boundaries. The 2008 MWAM has also been used to evaluate the functional values of the mitigation wetlands from 2011 through 2017, as shown in Table 2-4. Four AAs were assessed in 2017, including the created wetlands within the north parcel, preserved wetlands within the north parcel, created wetlands within the south parcel, and preserved wetlands within the south parcel. The created and preserved wetland AAs within the Big Muddy mitigation site were not separated by parcel (north/south) in 2012.

**Table 2-1. Summary of Wetland Credits From 2011 Through 2017 at the Big Muddy Site (Page 1 of 2)**

	Compensatory Mitigation Type	USACE Mitigation Credit Ratio	2011 Delineated Acres	Scaled % Credit Standards	2011 Credit Acres	2012 Delineated Acres	Scaled % Credit Standards	2012 Credit Acres	2013 Delineated Acres	Scaled % Credit Standards	2013 Credit Acres	2014 Delineated Acres
<b>North Parcel</b>	Wetland Creation: Establishment (area between constructed cells in north parcel)	1:1	0.44	70%	0.31	0.00	0%	0.00	1.76	70%	1.23	1.76
	Wetland Creation: Establishment (wetland cells in north parcel)	1:1	5.75	70%	4.03	5.76	70%	4.03	5.76	70%	4.03	5.76
	Wetland Preservation (north parcel)	4:1	0.73	100%	0.18	0.73	100%	0.18	0.73	100%	0.18	0.73
	Upland Buffer (north parcel)	5:1	3.70	100%	0.74	3.69	100%	0.74	2.37	100%	0.47	2.37
	<b>North Subtotal</b>		<b>10.62</b>	<b>-</b>	<b>5.26</b>	<b>10.18</b>		<b>4.95</b>	<b>10.62</b>		<b>5.92</b>	<b>10.62</b>
<b>South Parcel</b>	Wetland Creation: Establishment (wetland cell in south parcel)	1:1	-			4.55	70%	3.19	4.17	70%	2.92	4.17
	Wetland Preservation (south parcel)	4:1	-			1.83	100%	0.46	1.83	100%	0.46	1.83
	Upland Buffer (south parcel)	5:1	-			1.31	100%	0.26	1.25	100%	0.25	1.25
	<b>South Subtotal</b>					<b>7.69</b>		<b>3.90</b>	<b>7.25</b>		<b>3.63</b>	<b>7.25</b>
<b>Total</b>			<b>10.62</b>		<b>5.26</b>	<b>17.87</b>		<b>8.86</b>	<b>17.87</b>		<b>9.55</b>	<b>17.87</b>

**Table 2-1. Summary of Wetland Credits From 2011 Through 2017 at the Big Muddy Site (Page 2 of 2)**

	Compensatory Mitigation Type	Scaled % Credit Standards	2014 Credit Acres	2015 Delineated Acres	Scaled % Credit Standards	2015 Credit Acres	2016 Delineated Acres	Scaled % Credit Standards	2016 Credit Acres	2017 Delineated Acres	Scaled % Credit Standards	2017 Credit Acres
<b>North Parcel</b>	Wetland Creation: Establishment (area between constructed cells in north parcel)	100%	1.76	1.63	100%	1.63	1.63	100%	1.63	1.63	100%	1.63
	Wetland Creation: Establishment (wetland cells in north parcel)	70%	4.03	5.76	100%	5.76	5.76	100%	5.76	5.76	100%	5.76
	Wetland Preservation (north parcel)	100%	0.18	0.73	100%	0.18	0.73	100%	0.18	0.73	100%	0.18
	Upland Buffer (north parcel)	100%	0.47	2.50	100%	0.50	2.50	100%	0.50	2.50	100%	0.50
	<b>North Subtotal</b>		<b>6.45</b>	<b>10.62</b>		<b>8.07</b>	<b>10.62</b>		<b>8.07</b>	<b>10.62</b>		<b>8.07</b>
<b>South Parcel</b>	Wetland Creation: Establishment (wetland cell in south parcel)	100%	4.17	4.17	100%	4.17	4.17	100%	4.17	4.17	100%	4.17
	Wetland Preservation (south parcel)	100%	0.46	1.83	100%	0.46	1.83	100%	0.46	1.83	100%	0.46
	Upland Buffer (south parcel)	100%	0.25	1.25	100%	0.25	1.25	100%	0.25	1.25	100%	0.25
	<b>South Subtotal</b>		<b>4.88</b>	<b>7.25</b>		<b>4.88</b>	<b>7.25</b>		<b>4.88</b>	<b>7.25</b>		<b>4.88</b>
<b>Total</b>			<b>11.33</b>	<b>17.87</b>		<b>12.95</b>	<b>17.87</b>		<b>12.95</b>	<b>17.87</b>		<b>12.95</b>

Table 2-2. Wetland Crediting and Performance Standard Summary for the Original Big Muddy Creek Site (Page 1 of 2)

Compensatory Mitigation Type	USACE Mitigation Credit Ratio <sup>(a)</sup>	Proposed Acres	Preliminary Credit Estimate (acres)	Performance Standard 1	Performance Standard 2	Performance Standard 3	Scaled % Credit Criteria <sup>(b)</sup>	
North Parcel	Creation: Establishment <sup>(c)</sup> (area between cells [1.76 acres] and passive creation in northern tip of site [1.03 acres])	1:1	1.03–2.79	1.03–2.79	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria	Achieve 70% Absolute Cover of FAC or Wetter Plants	Noxious Weed Absolute Cover < 5%	Features constructed/implemented and: All standards met = 100% Standard 1 met and demonstrable progress on 2–3 = 70% Standard 1 not met but demonstrable progress on 1–3 = 50% Standard 1 met but lack of progress/corrective action on 2–3 = 30% Standard 1 not met and no demonstrable progress/corrective Action = 0%
	Creation: Establishment (emergent marsh and open water in north parcel)	1:1	6.53	6.53	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria (excluding open-water areas)	Achieve 70% Absolute Cover of FAC or Wetter Plants (excluding open-water areas)	Noxious Weed Absolute Cover < 5%	Features constructed/implemented and: All standards met = 100% Standard 1 met and demonstrable progress on 2–3 = 70% Standard 1 not met but demonstrable progress on 1–3 = 50% Standard 1 met but lack of progress/corrective action on 2–3 = 30% Standard 1 not met and no demonstrable progress/corrective Action = 0%
	Preservation (north parcel)	4:1	0.73	0.18	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria	N/A	Noxious Weed Absolute Cover < 5%	All standards met = 100% Standard 1 met and demonstrable progress on 3 = 75% Standard 1 not met but demonstrable progress on 1 and 3 = 50% Standard 1 met but lack of progress on 3 = 30% Standard 1 not met = 0%
	Upland Buffer (north parcel)	5:1	0.43	0.09	N/A	N/A	Noxious Weed Absolute Cover < 5%	Standard 3 met = 100% Standard 3 not met but with demonstrable progress = 30% Standard 3 not met with no demonstrable progress = 0%

**Table 2-2. Wetland Crediting and Performance Standard Summary for the Original Big Muddy Creek Site (Page 2 of 2)**

Compensatory Mitigation Type	USACE Mitigation Credit Ratio <sup>(a)</sup>	Proposed Acres	Preliminary Credit Estimate (acres)	Performance Standard 1	Performance Standard 2	Performance Standard 3	Scaled % Credit Criteria <sup>(b)</sup>
<b>South Parcel</b>	<b>Creation: Establishment (emergent marsh and open water in south parcel)<sup>(d)</sup></b>	1:1	5.47	5.47	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria (excluding open-water areas)	Achieve 70% Absolute Cover of FAC or Wetter Plants (excluding open-water areas)	Noxious Weed Absolute Cover < 5%  Features constructed/implemented and: All standards met = 100% Standard 1 met and demonstrable progress on 2–3 = 70% Standard 1 not met but demonstrable progress on 1–3 = 50% Standard 1 met but lack of progress/corrective action on 2–3 = 30% Standard 1 not met and no demonstrable progress/corrective Action = 0%
	<b>Preservation (south parcel)<sup>(d)</sup></b>	4:1	1.83	0.46	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria	N/A	Noxious Weed Absolute Cover < 5%  All standards met = 100% Standard 1 met and demonstrable progress on 3 = 75% Standard 1 not met but demonstrable progress on 1 and 3 = 50% Standard 1 met but lack of progress on 3 = 30% Standard 1 not met = 0%
	<b>Upland Buffer (south parcel)</b>	5:1	NA	NA	N/A	N/A	Noxious Weed Absolute Cover < 5%  Standard 3 met = 100% Standard 3 not met but with demonstrable progress = 30% Standard 3 not met with no demonstrable progress = 0%
<b>Total</b>			<b>13.76–15.52 acres</b>				

(a) USACE, 2005.

(b) Percentages to be applied to credit estimate acres in Column 5.

(c) Incidentally created wetlands will be credited according to parameters listed under “Creation: Establishment.”

(d) Areas added in 2012 have been included in preliminary wetland crediting and performance standard summary approved by the USACE for the Big Muddy wetland mitigation project.

Table 2-3. Summary of Performance Standards for Big Muddy Credit Areas

	Compensatory Mitigation Type	Performance Standard 1	Performance Standard 2	Performance Standard 3	Discussion
North Parcel	<b>Creation: Establishment<sup>(a)</sup> (area between cells [1.76 acres] and passive creation in northern tip of site [1.03 acres])</b>	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria	Achieve 70% Absolute Cover of FAC or Wetter Plants	Noxious Weed Absolute Cover < 5%	Performance Standards 1, 2 and 3 met. Full credit allocated.
	<b>Creation: Establishment (emergent marsh and open water in north parcel)</b>	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria (excluding open-water areas)	Achieve 70% Absolute Cover of FAC or Wetter Plants (excluding open-water areas)	Noxious Weed Absolute Cover < 5%	Performance Standards 1, 2 and 3 met. Full credit allocated.
	<b>Preservation (north parcel)</b>	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria	N/A	Noxious Weed Absolute Cover < 5%	Performance Standards 1 and 3 met. Full credit allocated.
	<b>Upland Buffer (north parcel)</b>	N/A	N/A	Noxious Weed Absolute Cover < 5%	Performance Standard 3 met. Full credit allocated.
South Parcel	<b>*Creation: Establishment<sup>(b)</sup> (emergent marsh and open water in south parcel)</b>	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria (excluding open-water areas)	Achieve 70% Absolute Cover of FAC or Wetter Plants (excluding open-water areas)	Noxious Weed Absolute Cover < 5%	Performance Standards 1, 2 and 3 met. Full credit allocated.
	<b>*Preservation (south parcel)</b>	Satisfy 1987 Wetland Manual and 2010 Regional Supplement Wetland Hydrology Wetland Soils Hydrophytic Vegetation Criteria	N/A	Noxious Weed Absolute Cover < 5%	Performance Standards 1 and 3 met. Full credit allocated.
	<b>Upland Buffer (south parcel)</b>	N/A	N/A	Noxious Weed Absolute Cover < 5%	Performance Standard 3 met. Full credit allocated.

(a) Incidentally created wetlands will be credited according to parameters listed under "Creation: Establishment."

(b) Areas added in 2012 have been included in preliminary wetland crediting and performance standard summary approved by the USACE for the Big Muddy wetland mitigation project.

Table 2-4. Functions and Values of the Big Muddy Site From 2011 Through 2017 (Page 1 of 2)

Function and Value Parameters From the 2008 Montana Wetland Assessment Method	2011 (Creation) AA-1	2011 (Preservation) AA-2	2012 <sup>(a)</sup> (Creation) AA-1	2012 <sup>(a)</sup> (Preservation) AA-2	2014 Creation North Parcel	2014 Preservation North Parcel	2014 Creation South Parcel	2014 Preservation South Parcel	2015 Creation North Parcel	2015 Preservation North Parcel
Listed/Proposed Threatened and Endangered (T&E) Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
Montana Natural Heritage Program (MTNHP) Species Habitat	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)
General Wildlife Habitat	Mod (0.5)	High (0.9)	Mod (0.7)	High (0.9)	High (0.9)	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (0.9)	Mod (0.7)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	Mod (0.5)	Mod (0.4)	Mod (0.5)	Mod (0.4)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.4)	Mod (0.5)	Mod (0.5)
Short- and Long-Term Surface-Water Storage	High (1.0)	Mod (0.4)	High (1.0)	High (0.8)	High (1.0)	Low (0.3)	High (0.9)	Low (0.3)	High (1.0)	Low (0.3)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	High (0.9)	High (1.0)	High (0.9)	High (1.0)	High (1.0)	High (1.0)	High (0.9)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	Low (0.3)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (0.9)	High (0.9)	High (1.0)	High (1.0)	High (0.9)
Production Export/Food Chain Support	Mod (0.5)	High (0.9)	Mod (0.6)	High (1.0)	Mod (0.7)	Mod (0.4)	Mod (0.4)	Mod (0.7)	High (0.8)	Mod (0.4)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (1.0)	Mod (0.7)
Uniqueness	Low (0.2)	Mod (0.4)	Low (0.2)	Mod (0.4)	Low (0.3)	Mod (0.4)	Low (0.3)	Mod (0.4)	Low (0.3)	Mod (0.4)
Recreation/Education Potential (bonus points)	High (0.15)	High (0.15)	High (0.15)	High (0.15)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>5.35/10</b>	<b>6.55/10</b>	<b>6.65/10</b>	<b>7.05/10</b>	<b>7.1/10</b>	<b>5.6/10</b>	<b>6.1/10</b>	<b>5.8/10</b>	<b>7.2/10</b>	<b>5.6/10</b>
<b>% of Possible Score Achieved</b>	<b>53.5%</b>	<b>65.5%</b>	<b>66.5%</b>	<b>70.5%</b>	<b>71.0%</b>	<b>56.0%</b>	<b>61.0%</b>	<b>58.0%</b>	<b>72.0%</b>	<b>56.0%</b>
<b>Overall Category</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands within Site Boundaries</b>	<b>6.19</b>	<b>0.73</b>	<b>10.31</b>	<b>2.56</b>	<b>7.52</b>	<b>0.73</b>	<b>4.17</b>	<b>1.83</b>	<b>7.39</b>	<b>0.73</b>
<b>Functional Units (acreage x actual points)</b>	<b>33.12</b>	<b>4.78</b>	<b>68.56</b>	<b>18.05</b>	<b>53.39</b>	<b>4.09</b>	<b>25.44</b>	<b>10.61</b>	<b>53.21</b>	<b>4.09</b>

Table 2-4. Functions and Values of the Big Muddy Site From 2011 Through 2017 (Page 2 of 2)

Function and Value Parameters From the 2008 Montana Wetland Assessment Method	2015 Creation South Parcel	2015 Preservation South Parcel	2016 Creation North Parcel	2016 Preservation North Parcel	2016 Creation South Parcel	2016 Preservation South Parcel	2017 Creation North Parcel	2017 Preservation North Parcel	2017 Creation South Parcel	2017 Preservation South Parcel
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)
General Wildlife Habitat	Mod (0.7)	Mod (0.7)	High (0.9)	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (0.9)	Mod (0.7)	Mod (0.7)	Mod (0.7)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	Mod (0.5)	Mod (0.4)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.4)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.4)
Short- and Long-Term Surface-Water Storage	High (0.9)	Low (0.3)	High (1.0)	Low (0.3)	High (0.9)	Low (0.3)	High (1.0)	Low (0.3)	High (0.9)	Low (0.3)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (0.9)	High (1.0)	High (1.0)	High (1.0)	High (0.9)	High (1.0)	High (1.0)	High (1.0)	High (0.9)
Sediment/Shoreline Stabilization	High (0.9)	High (1.0)	High (0.9)	High (0.9)	High (0.9)	High (1.0)	High (1.0)	High (0.9)	High (0.9)	High (1.0)
Production Export/Food Chain Support	Mod (0.4)	Mod (0.7)	High (0.8)	Mod (0.4)	Mod (0.4)	Mod (0.7)	Mod (0.8)	Mod (0.4)	Mod (0.4)	Mod (0.7)
Groundwater Discharge/Recharge	Mod (0.7)	Mod (0.7)	High (1.0)	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (1.0)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Low (0.3)	Mod (0.4)	Low (0.3)	Mod (0.4)	Low (0.3)	Mod (0.4)	Low (0.3)	Mod (0.4)	Low (0.3)	Mod (0.4)
Recreation/Education Potential (bonus points)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>6.1/10</b>	<b>5.8/10</b>	<b>7.2/10</b>	<b>5.6/10</b>	<b>6.1/10</b>	<b>5.8/10</b>	<b>7.2/10</b>	<b>5.6/10</b>	<b>6.1/10</b>	<b>5.8/10</b>
<b>% of Possible Score Achieved</b>	<b>61.0%</b>	<b>58.0%</b>	<b>72.0%</b>	<b>56.0%</b>	<b>61.0%</b>	<b>58.0%</b>	<b>72.0%</b>	<b>56.0%</b>	<b>61.0%</b>	<b>58.0%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands within Site Boundaries</b>	<b>4.17</b>	<b>1.83</b>	<b>7.39</b>	<b>0.73</b>	<b>4.17</b>	<b>1.83</b>	<b>7.39</b>	<b>0.73</b>	<b>4.17</b>	<b>1.83</b>
<b>Functional Units (acreage x actual points)</b>	<b>25.44</b>	<b>10.61</b>	<b>53.21</b>	<b>4.09</b>	<b>25.44</b>	<b>10.61</b>	<b>53.21</b>	<b>4.10</b>	<b>25.44</b>	<b>10.62</b>

(a) 2012 AAs included wetland areas on both sides (north/south) of US Highway 2.



The Creation north parcel AA encompassed 7.39 acres and included the constructed wetland cells and excavated areas between the cells. This AA was rated as a Category II wetland with 72 percent of the total possible points in 2017, which is an increase of one percent since 2014. The AA has shown continued improvement since construction in 2011. The functional ratings improved after 2012, increasing from 66.5 percent to 72 percent because of improvements in the level of disturbance, general wildlife habitat, production export/food chain support (tied to general wildlife habitat and increased hydrophytic vegetation), and uniqueness (tied to disturbance level). High ratings were assessed for general wildlife habitat, short- and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, groundwater discharge/recharge, production export/food chain support, and recreation/education potential. This AA achieved 53.21 total functional units in 2017, which is a decrease by 0.18 functional units since 2014 and was a result of the decline in wetland acreage in this AA by 0.13 acre since 2014.

The Preservation north parcel AA included 0.73 acre located within the floodway fringe of the existing tributary to Big Muddy Creek (wetland community Type 4). This AA was rated as a Category III wetland with 56 percent of the total possible points and 4.09 functional units in 2017. The total possible points and functional units achieved decreased within this AA in 2014 because of a reevaluation of the water regime (changed from perennial to seasonal) and surface-water outlet (changed from unrestricted to restricted outlet). The AA received high ratings in 2017 for sediment/nutrient/toxicant removal, sediment/shoreline stabilization, and recreation/education potential. The north parcel Creation and Preservation AAs scored 53.21 and 4.09 functional units, respectively. Combined, the north parcel Creation and Preservation AAs scored 57.3 functional units in 2017.

The Creation south parcel AA encompassed 4.17 acres within the footprint of the excavated wetland cell and was dominated by wetland community Type 12. The AA was rated as a Category III wetland with 61 percent of the total possible points and 25.44 functional units in 2017, the same as 2016. The AA received high ratings for short- and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, and recreation/education potential.

The Preservation south parcel AA identified in 2017 included 1.83 acres of existing wetland and 10.62 functional units. The AA was rated as a Category III wetland with 58 percent of the total possible points from 2013 through 2017. The seasonal/intermittent nature of the wetland hydrology within this AA was the primary factor that limited overall functional ratings. The AA received high ratings for sediment/shoreline stabilization, sediment/nutrient/toxicant removal, and recreation/education potential. The south parcel Creation and Preservation AAs scored 25.44 and 10.62 functional units, respectively. Combined, the south parcel Creation and Preservation AAs attained a total 36.06 functional units in 2017.

No diversion structures or nesting structures are currently installed at the site. Two infestations of Canadian thistle, which is a Priority 2B noxious weed, were observed at the edge of the unnamed tributary in the northeastern quadrant of the north mitigation site. Weed coverage at both portions of the mitigation site is less than 1 percent. MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds identified at each location and treatment to contain and control identified populations.

## 2.2 EASTON RANCH (BUTTE DISTRICT, YEAR 8)

The MDT wetland mitigation project at the Easton Ranch is located in the northwestern quarter of Section 32, Township 4 North, Range 9 East, Park County, Montana. The property is located approximately 3 miles east of US Highway 89 and 4 miles northeast of Wilsall. The wetland mitigation conservation easement area encompasses approximately 34 fenced acres and is located east of the Shields River within the boundaries of the larger Easton Family Ranch (the previous landowner). The wetland restoration site is located within Watershed #13 – Upper Yellowstone River Basin. Wetlands were developed at this location to provide compensatory mitigation for wetland impacts associated with transportation projects in the Butte District.

Construction entailed excavating a series of wetland cells and a flood channel that bisects the 34-acre mitigation area. The primary source of wetland hydrology is groundwater supplemented by surface water from high flows associated with the Shields River. An existing irrigation diversion and delivery system was maintained to provide supplemental water to the northeastern corner of the site. Revegetation tasks included planting woody cuttings and containerized shrubs, seeding wetland herbaceous species within the excavated wetland areas, and transplanting wetland plants and soils from existing wetlands to excavated areas. The wetland project was designed to increase flood storage, improve wildlife habitat, and restore riparian and wetland habitat impacted by past agricultural practices within the Shields River Watershed. The project objectives include:

- Reestablish a previously existing, relic floodplain channel and associated riparian and floodplain wetland areas
- Create approximately 25 acres of emergent, scrub/shrub and riparian wetlands by replacing existing hay fields with a variety of wetland communities that mimic habitats found in bio-reference wetland areas located north and south of the project
- Reestablish hydrology to approximately 1.56 acres of drained wetlands in the north portion of the site
- Preserve 1.1 acres of existing scrub/shrub, forested, and palustrine emergent communities at several locations within the project area
- Mimic old meander scars and relic flood channels within the wetland mitigation site
- Improve water-storage capacity and increase the amount of floodplain area across the site
- Increase the amount of wildlife habitat in this reach of the Shields River.

Table 2-5 summarizes the current estimated wetland credits based on the USACE-approved credit ratios [MDT, 2008] and the wetland delineation completed in June 2017. Proposed mitigation included creating 24.95 acres of emergent and shrub/scrub wetlands, reestablishing a 1.56-acre flood channel, preserving 1.10 acres of preexisting wetland, and maintaining 6.43 acres of upland buffer. Proposed wetland credits for the project site totaled 27.41 credit acres, which accounted for 0.67 acre of impacts associated with the construction of the mitigation wetland.

**Table 2-5. Credit Summary From 2010 Through 2017 for the Easton Ranch Site**

Proposed Mitigation Features	Compensatory Mitigation Type	USACE Mitigation Ratios	Anticipated Final Credit Acreages	Proposed Final Wetland Credits (Acres)	2011 Wetland Acreages	2011 Credit Estimated (Acres)	2012 Wetland Acreages	2012 Credit Estimated (Acres)	2013 Wetland Acreages	2013 Credit Estimated (Acres)	2014 Wetland Acreages	2014 Credit Estimated (Acres)	2015 Wetland Acreages	2015 Estimated Credit (Acres)	2016 Wetland Acreages	2016 Credit Estimated (Acres)	2017 Wetland Acreages	2017 Credit Estimated (Acres)
Creation of palustrine emergent wetland via shallow excavation	Creation	1:1	24.95	24.95	9.09	9.09	9.09	9.09	9.74	9.74	9.98	9.98	9.34	9.34	9.34	9.34	9.79	9.79
Reestablishment of relic flood channel	Restoration (Reestablishment)	1:1	1.56	1.56	1.45	1.45	1.45	1.45	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56
Preservation of existing shrub/scrub and palustrine emergent wetland	Preservation	4:1	1.10	0.28	1.10	0.28	1.10	0.28	1.10	0.28	1.10	0.28	1.10	0.28	1.10	0.28	1.10	0.28
Establish a 50-foot-wide upland buffer	Upland Buffer	5:1	6.43	1.29	6.43 <sup>(a)</sup>	1.29	6.43 <sup>(a)</sup>	1.29	6.43 <sup>(a)</sup>	1.29	2.60 <sup>(b)</sup>	0.52	11.5 <sup>(b)</sup>	2.30	11.5	2.30	11.5	2.30
Project impacts			-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67	-0.67
<b>Total</b>				<b>27.41</b>		<b>11.44</b>		<b>11.44</b>		<b>12.19</b>		<b>11.67</b>		<b>12.81</b>		<b>12.81</b>		<b>13.26</b>

(a) The upland buffer was expected to decrease as wetland areas expand within the mitigation boundary. The values presented in this table before 2014 (6.43 acres) represented the expected extent of upland buffer after maximum wetland acreage has been achieved.

(b) A 50-foot buffer was calculated with GIS in 2015.

The 2017 delineation identified a total of 12.45 acres of wetlands within the project boundary. Approximately 9.79 acres of emergent wetland has developed to date within the constructed cells. The restored channel encompassed 1.56 acres of riverine emergent wetland. The preexisting wetlands encompassed 1.1 acres. Uplands accounted for 20.64 acres of the 32.65-acre site. The current 50-foot upland buffer calculated for this site totals 11.5 acres. The expected value of 2.6 acres of upland buffer was replaced in 2015 with the GIS-calculated 50-foot upland buffer of 11.5 acres, based on the existing extent of wetland development within the site, which resulted in a slight increase of credits between 2014 and 2017, although the overall extent of wetland habitat has decreased. Applying the approved USACE mitigation ratios to each mitigation feature, a total of 13.26 acres of credit were estimated in 2017, which is approximately 14.15 acres shy of the proposed final credit acreage.

This mitigation site has not developed wetland habitat as expected. Several of the excavated depressions that contained surface water in 2011 and 2014 were dry in 2012, 2013, and 2015, which limited the potential expansion of wetland acreage within the site. The increase of wetland acreage delineated in 2014 was primarily associated with the lower topographical swales and basins and seasonal groundwater. Decreased water levels within the open-water depressions observed on site during the 2012, 2013, 2015, 2016, and 2017 field surveys were likely caused by a decrease in precipitation during those years. In 2017, irrigation water that was designed to flow through the eastern half of the site from north to south was flowing in the ditch and released onto the eastern portion of the site several times during the spring and summer months. If water is not added to the site annually, the southern portion of the restored channel and the created wetland directly west of the channel will likely revert to non-wetland status, which could result in a loss of approximately 0.5 acre (0.5 estimated credit) of created and restored wetland area. Currently, a transition of hydrophytic vegetation to upland vegetation is occurring in several areas of the project area, which may result in the loss of even more wetland acres.

The 2008 MDT MWAM [Berglund and McEldowney, 2008] has been used to evaluate three AAs. The AAs were separated by Creation, Restoration, and Preservation areas of the mitigation site and are discussed below. Table 2-6 summarizes the function and value ratings of the AAs from 2010 through 2017.

The Creation AA encompassed 9.79 acres of constructed palustrine, emergent wetland cells and has generated 57.27 functional units. The overall rating for the Creation AA remained at a Category III wetland characterized by low disturbance in 2017. The ratings were high for short- and long-term surface-water storage, sediment/nutrient/toxicant removal, and production export/food chain support. The number of units and acreage are expected to increase as some areas of upland in the excavated areas (community Type 13) transition to wetland habitat, provided sufficient wetland hydrology exists within the site.

**Table 2-6. Montana Wetland Assessment Method Summary for the Easton Ranch Site From 2010 Through 2017 (Page 1 of 3)**

<b>Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method</b>	<b>2011 Creation</b>	<b>2012 Creation</b>	<b>2013 Creation</b>	<b>2014 Creation</b>	<b>2015 Creation</b>	<b>2016 Creation</b>	<b>2017 Creation</b>
Listed/Proposed T&E Species Habitat	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
Montana Natural Heritage Program (MTNHP) Species Habitat	Mod (0.6)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)
General Wildlife Habitat	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (0.9)	High (0.9)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)
Short- and Long-Term Surface-Water Storage	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Sediment/Shoreline Stabilization	Low (0.2)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Production Export/Food Chain Support	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Groundwater Discharge/Recharge	High (1.0)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Low (0.3)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential (bonus points)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)
<b>Actual Points/Possible Points</b>	<b>5.75/10</b>	<b>5.75/10</b>	<b>5.75/10</b>	<b>5.65/10</b>	<b>5.65/10</b>	<b>5.85/10</b>	<b>5.85/10</b>
<b>% of Possible Score Achieved</b>	<b>57.5</b>	<b>57.5</b>	<b>57.5</b>	<b>56.5</b>	<b>56.5</b>	<b>58.5</b>	<b>58.5</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement</b>	<b>9.09</b>	<b>9.09</b>	<b>9.74</b>	<b>9.98</b>	<b>9.34</b>	<b>9.34</b>	<b>9.79</b>
<b>Functional Units (acreage x actual points)</b>	<b>52.27</b>	<b>52.27</b>	<b>56.01</b>	<b>56.39</b>	<b>52.77</b>	<b>54.64</b>	<b>57.27</b>

**Table 2-6. Montana Wetland Assessment Method Summary for the Easton Ranch Site From 2010 Through 2017 (Page 2 of 3)**

<b>Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method</b>	<b>2011 Restoration</b>	<b>2012 Restoration</b>	<b>2013 Restoration</b>	<b>2014 Restoration</b>	<b>2015 Restoration</b>	<b>2016 Restoration</b>	<b>2017 Restoration</b>
Listed/Proposed T&E Species Habitat	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	Mod (0.6)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)
General Wildlife Habitat	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	Mod (0.6)	Mod (0.6)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Production Export/Food Chain Support	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Groundwater Discharge/Recharge	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Low (0.3)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential (bonus points)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)
<b>Actual Points/Possible Points</b>	<b>5.95/10</b>	<b>5.65/10</b>	<b>5.95/10</b>	<b>5.85/10</b>	<b>5.85/10</b>	<b>5.85/10</b>	<b>5.85/10</b>
<b>% of Possible Score Achieved</b>	<b>59.5</b>	<b>56.5</b>	<b>59.5</b>	<b>58.5</b>	<b>58.5</b>	<b>58.5</b>	<b>58.5</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement</b>	<b>1.45</b>	<b>1.45</b>	<b>1.56</b>	<b>1.56</b>	<b>1.56</b>	<b>1.56</b>	<b>1.56</b>
<b>Functional Units (acreage × actual points)</b>	<b>8.63</b>	<b>8.19</b>	<b>9.28</b>	<b>9.13</b>	<b>9.13</b>	<b>9.13</b>	<b>9.13</b>

**Table 2-6. Montana Wetland Assessment Method Summary for the Easton Ranch Site From 2010 Through 2017 (Page 3 of 3)**

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method	2011 Preservation	2012 Preservation	2013 Preservation	2014 Preservation	2015 Preservation	2016 Preservation	2017 Preservation
Listed/Proposed T&E Species Habitat	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	Mod (0.6)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)
General Wildlife Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	High (0.9)	Mod (0.6)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Short- and Long-Term Surface-Water Storage	High (0.8)	High (0.8)	High (0.8)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Production Export/Food Chain Support	Exc (1.0)	Exc (1.0)	Exc (1.0)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Recreation/Education Potential (bonus points)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)
<b>Actual Points/Possible Points</b>	<b>6.95/9</b>	<b>6.25/9</b>	<b>6.55/9</b>	<b>5.85/9</b>	<b>5.85/9</b>	<b>5.85/9</b>	<b>5.85/9</b>
<b>% of Possible Score Achieved</b>	<b>77.2</b>	<b>69.4</b>	<b>72.8</b>	<b>65.0</b>	<b>65.0</b>	<b>65.0</b>	<b>65.0</b>
<b>Overall Category</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>II</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement</b>	<b>1.1</b>	<b>1.1</b>	<b>1.1</b>	<b>1.1</b>	<b>1.1</b>	<b>1.1</b>	<b>1.1</b>
<b>Functional Units (acreage x actual points)</b>	<b>7.65</b>	<b>6.88</b>	<b>7.21</b>	<b>6.44</b>	<b>6.44</b>	<b>6.44</b>	<b>6.44</b>

The Restoration AA consisted of 1.56 acres of reestablished flood channel. The Restoration AA (flood channel) received a Category III rating with 58.5 percent of the total possible points. Sediment/shoreline stabilization increased from moderate to high between 2012 and 2013. Ratings were high for sediment/nutrient/toxicant removal and moderate for general wildlife habitat, flood attenuation, short- and long-term surface-water storage, production export/food chain support, groundwater discharge/recharge, and uniqueness. The Restoration AA achieved 9.13 functional units in 2017.

The 1.1-acre Preservation AA encompassed the existing forested, shrub/scrub and palustrine emergent wetlands. The existing wetland within the Preservation AA was rated as Category II with 65.0 percent of the possible points. The presence of emergent, scrub/shrub, and forested wetland types increased the structural diversity and flood attenuation ratings. Ratings were high for general wildlife habitat, flood attenuation, and sediment/nutrient/toxicant removal. This AA was reevaluated

in 2014 as supporting a seasonal/intermittent water regime, which was a decrease from a perennial water regime that was recognized on previous evaluations and resulted in a decrease of actual points and functional units. The Preservation AA scored 6.44 functional units in 2017.

Table 2-7 summarizes the mitigation goals for the Easton Ranch. The Easton Ranch wetland mitigation site has shown continued progress toward achieving goals, although the targeted credit acreage has not been achieved in 2017 and will not occur without increasing hydrology throughout the footprint of the excavated areas. The site has achieved five of the six goals for this site. Although the site has developed nearly 10 acres of wetland habitat, this value falls over 50 percent short of the 25 acres originally identified as a target for wetland creation. Continued efforts by MDT and the landowner to release seasonal irrigation water onto the site will likely result in continued expansion of wetland habitat on the site.

**Table 2-7. Summary of Mitigation Goals for Easton Ranch Wetland Mitigation Site**

Mitigation Goal for Easton Ranch	Goal Achieved Y/N	Discussion
Create approximately 25 acres of new emergent, scrub/shrub, and riparian wetlands by replacing existing hay fields with a variety of wetland communities that mimic habitats found in bio-reference wetland areas located north and south of the project.	N	A total of 9.79 acres of wetland habitat have been created at this site to date. The beginnings of a dominance of hydrophytic trees and shrubs within created wetlands can be seen.
Reestablish a previously existing, relic floodplain channel and associated riparian and floodplain wetland areas that totals 1.56 acres.	Y	A 1.56-acre floodplain channel was excavated through the site. This channel was activated during peak spring runoff in 2011 with fluvial geomorphic processes that result in scour holes, riffles, and point bars. The fabric was exposed in minor areas, but bank erosion along this channel is minor and appears to be functioning as designed. Wetland vegetation has established within the footprint of the channel.
Preserve 1.1 acres of existing scrub/shrub, forested, and palustrine emergent communities at several locations within the project area.	Y	The 1.1 acres of existing scrub/shrub, forested, and palustrine emergent wetland communities have been preserved; livestock grazing has been eliminated; and the areas continue to exhibit wetland hydrology.
Mimic old meander scars and relic flood channels within the wetland mitigation site.	Y	Several depressional wetland areas have been constructed across the mitigation site and function as relic meander scars.
Improve water-storage capacity, and increase the amount of floodplain area across the site.	Y	Several depressional wetland areas have been constructed across the mitigation site and have increased the water-storage capacity of the floodplain.
Increase the amount of wildlife habitat in this reach of the Shields River.	Y	Wildlife habitat has been improved and protected by excluding livestock grazing, promoting the establishment of wetland vegetation, and restoring woody species in the vegetation community to create habitat diversity.

Five of the mitigation goals have been achieved at this site. The constructed floodplain channel was activated during the 2011 spring runoff and resulted in development of scour holes, riffles, and point bars through natural fluvial geomorphic processes. Hydrophytic vegetation has established within the



footprint of this channel. No bank erosion has been identified along the constructed channel through the course of yearly monitoring. Existing wetlands within the site have been preserved and grazing eliminated from these areas. The excavated depressions throughout the floodplain function as relic meander scars and store surface water during periods of high flow within the Shields River. These depressional wetlands have improved the water-storage capacity of the floodplain. Establishing hydrophytic vegetation communities; preserving existing scrub/shrub, forested, and emergent wetlands; and installing wildlife-friendly fencing around the site have improved wildlife habitat within the Easton Ranch site.

The summary of performance standards listed in Table 2-8 indicates that this site has not achieved the full suite of success criteria established in the mitigation plan for the Easton Ranch wetland mitigation site. All of the wetlands delineated within this site in 2016 met the USACE three parameter criteria for hydrology, vegetation, and soils. Groundwater has been documented filling the depressional wetlands excavated across the site. Groundwater wells that were established within the site during baseline evaluation had been removed during construction. Redoximorphic concentrations and other hydric characteristics have developed within the wetland soils across the site. Below-average precipitation in 2016 and the lack of water flow onto the site has decreased hydrology of the project area. Soils that were disturbed during construction have developed vegetation communities and are stable with no signs of active erosion. Areas that were identified as wetland habitat support a prevalence of hydrophytic vegetation. Trees and shrubs planted throughout the mitigation site continue to develop and natural recruitment of aspen, willows, and cottonwoods has been documented. Approximately 165 live-planted woody stems were observed in 2017. The woody plants remain small and have yet to achieve areal coverage greater than one percent site-wide. The lack of woody plant growth is attributed to the lack of hydrology observed on the site.

MDT is aware of the lack of water flow into the site and is working with the landowner and the irrigation district to have water diverted to the site earlier in the year. Irrigation water was released onto the eastern portion of the site several times during the spring and summer of 2017. Water should be diverted into the site during the early growing season to promote increased development of hydric soils and hydrophytic vegetation within the site. Nine bird boxes were installed at the site between 2010 and 2016, and eight new bird boxes were installed before the 2017 monitoring. Four of the bird boxes were occupied. All of the fences were intact. No maintenance was required for the man-made structures.

The site supports two state-listed noxious weeds (Canada thistle and gypsy-flower) primarily within the uplands and along the site perimeter (Figure A-3, Appendix A). The cover classes ranged from trace (< 1 percent) to low (1–5 percent) and moderate (6–25 percent) cover. Canada thistle was observed in community Types 1 – *Phleum pratense*/*Poa pratensis*, 3 – *Carex* spp., 5 – *Populus balsamifera*, 13 – *Bromus inermis*/*Phleum pratense*, 10 – *Bromus inermis*/*Populus tremuloides*, and 11 – *Juncus* spp. The gypsy-flower infestations represent a trace (< 1.0 percent) cover. MDT has an ongoing weed-control program, and contractors sprayed the site on July 27, 2017.

**Table 2-8. Summary of Performance Standards and Success Criteria for Easton Ranch Wetland Mitigation Site (Page 1 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Wetland Characteristics	The three parameter criteria for hydrology, vegetation, and soils are met as outlined in the 1987 Wetland Manual and the 2010 Regional Supplement.	Y	Areas that were identified as wetland habitat within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Areas that were identified as wetland habitat within the mitigation site exhibit soil saturation for a minimum 12.5 percent of the growing season.
	Groundwater wells will be left undisturbed within the site to monitor groundwater elevations during the growing season.	N	No groundwater wells remain on site. Because of construction activities, the original monitoring wells were removed from the site.
	Groundwater is filling the depressional wetlands excavated into the upland areas of the site.	Y	Indicators of groundwater filling the depressional wetlands include sparsely vegetated concave surfaces, saturation to the surface, and inundation.
	The constructed stream channel is stable.	Y	The constructed floodplain channel is stable with minimal bank erosion identified throughout the mitigation area.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	Hydric soil characteristics, including redoximorphic concentrations and depleted matrix, have developed throughout a majority of the constructed wetlands.
	Soil is sufficiently stable to prevent erosion.	Y	Disturbed soil is stable and does not exhibit signs of erosion.
	Soil is able to support plant cover.	Y	Plant cover has continued to develop across disturbed soils.
Hydrophytic Vegetation	Wetlands are delineated as hydrophytic by using technical guidelines.	Y	Areas that were identified as wetland habitat within the mitigation site support a prevalence of hydrophytic vegetation (OBL, FACW, and FAC).
Woody Plants	Trees and shrubs will be installed, and survival will be assessed.	Y	Trees and shrubs have been planted throughout the site and are assessed during each yearly monitoring visit.
	Scrub/shrub wetlands habitat will be achieved where 30 percent absolute cover by cuttings, planted, and volunteer woody plants is reached within the defined monitoring period or the site shows signs of progression toward that goal at the end of the defined monitoring period.	Y	Approximately 18 percent of the wetland areas identified within the site are dominated by woody vegetation. Planted woody species continue to survive and develop along the constructed flood channel. Natural recruitment of aspen, willows, and cottonwoods within the site continue to establish. The site appears to exhibit progress toward these success criteria.
Herbaceous Plants	At least 80 percent ocular vegetation coverage by desirable hydrophytic vegetation.	Y	Desirable hydrophytic vegetation consist of greater than 80 percent of total vegetation cover within delineated wetlands.
Wetland Acreage Development	27.41 net credit acres are provided for the project area.	N	A total of 13.26 acres of wetland credit has been generated for the site. This total includes 9.79 acres of created wetland, 1.56 acres of restored wetland, 1.10 acres of preserved wetland, establishment of a 11.5-acre upland buffer, and 0.67-acre debit from project impacts.
	Emergent wetland habitat will be 70–75 percent of mitigation wetland.	N	Emergent wetland habitat comprises approximately 81 percent of total wetland areas delineated in 2017.

**Table 2-8. Summary of Performance Standards and Success Criteria for Easton Ranch Wetland Mitigation Site (Page 2 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Wetland Acreage Development	Scrub/shrub wetland habitat will be 15–20 percent of wetland area.	Y	Scrub/shrub wetland habitat comprises approximately 18 percent of total wetland areas delineated in 2017. The increase in woody plants is caused by the increased size/height and is more visible above the herbaceous vegetation.
	Open water will be less than 5 percent of wetland area.	Y	Aquatic macrophytes habitat composes approximately 1 percent of total wetland areas delineated in 2017, which is an 8.1 percent reduction compared to 2015 and was likely caused by lower stream flows and lower seasonal precipitation. These inundated areas (< 3 feet deep) seasonally fluctuate throughout the growing season and support diverse submergent and emergent vegetation. The intent of this criterion was to minimize the amount of deep open-water habitat greater than 3 feet in depth.
Floodplain Channel Restoration	Stability is achieved when banks are vegetated with a majority of deep-rooting riparian and wetland plant species.	Y	Streambanks along the constructed channel are vegetated with a diversity of deep-rooting and wetland plant species.
	Bank stability will be evaluated by reference reach comparison.	Y	Banks within the constructed floodplain channel are stable and compare to reference reach conditions with no signs of erosion or channel movement.
	Vegetation transect across the floodplain will be monitored.	Y	Vegetation transect across the floodplain has been monitored yearly and supports a prevalence of species with a root stability index greater than 6.
Bank Stabilization (Shields River)	The area is visually inspected and photo-documented.	Y	The results of annual inspection and photographic documentation along the Shields River in the northwestern corner of the site are presented in the mitigation monitoring reports.
	Stability is achieved when the banks are vegetated with a majority of deep-rooting riparian and wetland plant species.	N	The banks of the Shields River are generally dominated by upland pasture grasses. Soil lifts and riprap installed along the bank are eroding near the northwestern corner of the site. Installed willow cuttings did not establish along this bank.
Upland Buffer	Noxious weeds do not exceed 10 percent cover within upland buffer area.	Y	Noxious weed cover is less than 10 percent within the upland buffer.
	Any area that was disturbed within the creditable buffer zone must have at least 50 percent aerial cover of nonweed species by the end of the monitoring period.	Y	Disturbed areas have established greater than 50 percent cover by nonweed species.
Weed Control	Less than 5 percent absolute cover of state-listed noxious weed species exists across the site.	Y	State-listed noxious weed species across the site is less than 5 percent absolute cover.
Fencing	Wildlife-friendly fencing is installed along the easement boundaries.	Y	Wildlife-friendly fencing has been removed from the western and southern portions of the easement boundaries to promote wildlife movement across the wetland and the Shield River riparian corridor. The remaining fences are in good condition.
Monitoring	Monitor the site for a minimum period of 5 years or longer as determined by the USACE.	Y	Comprehensive site monitoring has been ongoing for approximately 8 years, since construction activities were completed in 2009.

The east bank of the Shields River along the northwestern corner of the Easton Ranch site remained relatively stable from project completion through the 2011 runoff event. The structural integrity of the coir-wrapped soil lifts was intact following high flows. Fine-grain deposits accumulated on the lifts as floodwaters receded. The 2011 flood flows resulted in the formation of a wider base-flow channel caused by a slight westward shift of the west bank, away from the site.

In early 2012, a woody debris jam was removed from the outer bend of the Shield River channel (east bank) downstream from Photo Point 4A (PP-4A), and several downed trees were removed from the cottonwood forest in the adjacent riparian zone. Removing these stabilizing elements increased the vulnerability of the river to lateral migration. During the next high-flow event (spring 2013), significant bank erosion occurred immediately upstream of PP-4A. This erosion exposed the riprap that protected the reconstructed streambank, which undermined the riprap along an approximately 85-foot-long section that bank and also undermined the coir-wrapped soil lifts on that section, which caused significant loss of soil and willow cuttings. Photographs from PP-4A (found in the full report) document these changes.

Some reaccumulation of woody debris in the former log jam location was noted in 2014, but 2017 showed little additional accumulation and perhaps some loss of what wood had been gained the previous year. Although little additional bank erosion has been noted since the dramatic lateral cutting event of 2013, this section of bank remains exposed and vulnerable. The 2017 runoff period was fed by below-average precipitation. If some measures are not taken to provide additional stability to the outer bends of the Shields River through this reach, a future high-water event may result in significant additional movement of the bank, which already threatens to capture the northwestern fence corner of the project area.

## 2.3 FORSYTH NORTHWEST (4 SITES)

The Forsyth Northwest (FNW) project encompasses four wetland mitigation sites (West, Middle, East, and Treasure County Line) that were developed to mitigate for a cumulative total of 8.98 acres of wetland impacts associated with two MDT highway construction projects: the Volborg – N & S project (constructed in 2004) and the Forsyth – Northwest project (constructed in 2012). The four wetland mitigation sites are located in Rosebud County in the Sagebrush Steppe ecoregion of the Northwest Great Plains. The sites are within Watershed #14 – Middle Yellowstone.

### 2.3.1 Forsyth Northwest – East (Glendive District, Year 5)

The East site is located northwest of Forsyth along Montana Highway 12 at mile marker 262.3, approximately 1,000 feet from the Middle site and directly adjacent to US Highway 21. This 2.74-acre site is owned by MDT and intended to provide 1.07 acres of compensatory wetland mitigation. Proposed mitigation actions included the following:

- Excavate new wetland area with undulating bottoms
- Create emergent wetlands by placing salvaged wetland sod and hydrophytic vegetation within the excavated wetland and seeding with wetland grass mix.

The expected wetland community for this site is a palustrine emergent system dominated by herbaceous hydrophytes. Site construction was completed in summer 2012, and the revegetation was completed from August through October 2012.

The wetland acreage that was delineated in 2017 totaled 0.43 acres, which is a decrease of 0.76 acre since 2014. This decrease was likely driven by the below-average precipitation received at the site during 2016 and 2017. After a return to higher precipitation levels in subsequent monitoring years, the site is expected to exhibit increased desirable hydrophytic vegetation cover and an expansion of wetland acreage. Upland buffer accounted for 2.31 acres within the FNW East monitoring boundary. Applying standard wetland compensatory mitigation ratios [USACE, 2005], the site attained an estimated 0.89 credit acres, a decrease of 0.61 credit acre since 2014 (Table 2-9). No performance standards were established for this site.

**Table 2-9. Estimated Credit Summary for the Forsyth Northwest – East Wetland Mitigation Site**

Habitat Type	Mitigation Ratio	2014 Delineated Acres	2014 Estimated Credit Acres	2015 Delineated Acres	2015 Credit Acres	2016 Delineated Acres	2016 Estimated Credit Acres	2017 Delineated Acres	2017 Estimated Credit Acres
Created Wetland	1:1	1.19	1.19	0.46	0.46	0.43	0.43	0.43	0.43
Upland Buffer	5:1	1.55	0.31	2.28	0.46	2.31	0.46	2.31	0.46
<b>Total</b>		<b>2.74</b>	<b>1.50</b>	<b>2.74</b>	<b>0.92</b>	<b>2.74</b>	<b>0.89</b>	<b>2.74</b>	<b>0.89</b>

Results of the 2013 through 2017 functional assessments are summarized in Table 2-10. The total aquatic habitat developed to date within the 2.74-acre project area is 0.43 acres. The site was evaluated as one AA, which was rated as a Category III wetland with 48.89 percent of the total possible points. The Montana-listed S2 species of concern (grand redstem and western hog-nosed snake) were documented in 2013 and 2015, respectively, and provided a high MTNHP species habitat rating. The disturbance rating improved from high in 2013 to moderate in 2014 through 2017. Sediment/shoreline stabilization improved from a low to moderate rating in 2015 because of an increase in percent cover of wetland species with stability ratings greater than or equal to 6. Short- and long-term surface-water storage was given a low rating in 2017 as a result of the decrease in water contained in the AA's wetlands subject to periodic flooding/ponding. The site achieved 1.9 functional units, a decrease of 3.2 units since 2014. The decrease in functional units was primarily related to the wetland acreage contraction, which was likely driven by the below-average precipitation received at the site during 2016 and 2017.

Infestations of noxious weeds have decreased dramatically since 2016. Only two small areas of salt-cedar with low cover classes occur within the site (Figure A-8, Appendix A). Yearly control measures will continue to eliminate noxious weed infestations. The fence along the eastern side of the site was in good working order. No man-made water-control structures have been installed at the East site.

**Table 2-10. Montana Wetland Assessment Method Summary for the Forsyth Northwest – East Site From 2013 Through 2017**

<b>Function and Value Parameters From the 2008 Montana Wetland Assessment Method</b>	<b>2013</b>	<b>2014</b>	<b>2015</b>	<b>2016</b>	<b>2017</b>
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Low (0.2)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	N/A	N/A	N/A	N/A	N/A
Short- and Long-Term Surface-Water Storage	Mod (0.6)	Mod (0.6)	Low (0.3)	Low (0.3)	Low (0.3)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	Low (0.2)	Low (0.2)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Production Export/Food Chain Support	Low (0.2)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
Groundwater Discharge/Recharge	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Low (0.1)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)
Recreation/Education Potential (bonus points)	N/A	N/A	N/A	N/A	N/A
<b>Actual Points/Possible Points</b>	<b>3.6/9</b>	<b>4.3/9</b>	<b>4.4/9</b>	<b>4.4/9</b>	<b>4.4/9</b>
<b>% of Possible Score Achieved</b>	<b>40.0%</b>	<b>47.8%</b>	<b>48.9%</b>	<b>48.9%</b>	<b>48.9%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries</b>	<b>1.19</b>	<b>1.19</b>	<b>0.46</b>	<b>0.43</b>	<b>0.43</b>
<b>Functional Units (acreage × actual points)</b>	<b>4.3</b>	<b>5.1</b>	<b>2.0</b>	<b>1.9</b>	<b>1.9</b>

### 2.3.2 Forsyth Northwest – Middle (Glendive District, Year 5)

The Middle mitigation site is a 1.80-acre site owned by MDT. The site is adjacent to US Highway 21 near mile marker 261.9 and is situated among old meander scars across the Big Porcupine Creek floodplain. This area is intended to provide 0.34 acre of compensatory wetland mitigation. Proposed mitigation actions included the following:

- Excavate a new wetland area with undulating bottoms
- Create emergent wetland by placing salvaged wetland sod and hydrophytic vegetation within the excavated wetlands and seeding with wetland grass mix.

The expected wetland community for this site is a palustrine emergent system dominated by herbaceous hydrophytes. Site construction was completed in summer 2012, and the revegetation was completed from August through October 2012.

Table 2-11 shows the total delineated acres and credit acres estimated for the FNW Middle site from 2013 through 2017. The 2017 wetland delineation identified 0.58 acre of created emergent wetlands, an increase of 0.09 acre since 2016, and 1.22 acres of upland buffer. The site accrued

0.82 estimated credit acre in 2017. No performance standards were identified for this site. Four noxious weeds were identified within the mitigation site boundaries yet exhibited very low percent areal cover (1–5 percent). The percent cover of native hydrophytes was low. The cover of wetland vegetation will increase as favorable wetland conditions persist and as the site recovers from the 2012 construction.

**Table 2-11. Credit Summary for the Forsyth Northwest – Middle Site**

Habitat Type	Mitigation Ratio	2014 Delineated Acres	2014 Estimated Credit Acres	2015 Delineated Acres	2015 Estimated Credit Acres	2016 Delineated Acres	2016 Estimated Credit Acres	2017 Delineated Acres	2017 Estimated Credit Acres
Created Wetland	1:1	0.49	0.49	0.49	0.49	0.49	0.49	0.58	0.58
Upland Buffer	5:1	1.31	0.26	1.31	0.26	1.31	0.26	1.22	0.24
<b>Total</b>		<b>1.80</b>	<b>0.75</b>	<b>1.80</b>	<b>0.75</b>	<b>1.80</b>	<b>0.75</b>	<b>1.8</b>	<b>0.82</b>

The results of the functional assessments from 2013 through 2017 are summarized in Table 2-12. The Middle site was evaluated as one AA and encompassed 0.58 acre. The prominent factor that adversely impacted the overall score and functional units at the site in 2013 was the general condition of the AA: a high percentage of bare ground, low vegetation cover, and low quality of wildlife habitat. The disturbance rating went from high in 2013 to moderate in 2014 based on the increased vegetation cover in disturbed areas. The Montana-listed S2 species of concern, grand redstem (*Ammannia robusta*), was documented growing within the constructed wetland in 2013 and provided a high MTNHP rating. The flood attenuation rating was modified based on the lack of connection to Big Porcupine Creek. The sediment/shoreline stabilization increased in 2015 to reflect the increase in percent cover of wetland species with stability ratings greater than or equal to 6. Ratings for general wildlife habitat, sediment/nutrient/toxicant removal, and uniqueness increased from 2013 to 2016 because of less disturbance and higher wetland vegetation cover; no change was observed from 2016 to 2017. This site achieved 42.2 percent of the possible score and a total of 2.0 functional units in 2017, which is an increase of 0.1 unit since 2016 because of the increase in wetland acreage. Continual development of the vegetation cover will result in increased functional units, although the small size of the AA will limit the total score.

Infestations of four Priority 2B noxious weeds (field bindweed, Canadian thistle, leafy spurge, and salt-cedar) were identified at this site in 2017 and should be controlled to prevent further spread and colonization. The fence along the mitigation area was in good condition. No man-made water-control structures or bird boxes were installed at this site.

**Table 2-12. Montana Wetland Assessment Method Summary for the Forsyth Northwest – Middle Site From 2013 Through 2017**

<b>Function and Value Parameters From the 2008 Montana Wetland Assessment Method</b>	<b>2013</b>	<b>2014</b>	<b>2015</b>	<b>2016</b>	<b>2017</b>
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Low (0.2)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	High (1.0)	N/A	N/A	N/A	N/A
Short- and Long-Term Surface-Water Storage	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	Mod (0.7)	High (0.8)	High (0.8)	High (0.8)
Sediment/Shoreline Stabilization	Low (0.2)	Low (0.2)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Production Export/Food Chain Support	Low (0.2)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
Groundwater Discharge/Recharge	N/A	/N/A	N/A	N/A	N/A
Uniqueness	Low (0.1)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)
Recreation/Education Potential (bonus points)	N/A	N/A	N/A	N/A	N/A
<b>Actual Points/Possible Points</b>	<b>3.9/9</b>	<b>3.3/9</b>	<b>3.8/9</b>	<b>3.8/9</b>	<b>3.8/9</b>
<b>% of Possible Score Achieved</b>	<b>43.3%</b>	<b>36.7%</b>	<b>42.2%</b>	<b>42.2%</b>	<b>42.2%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries</b>	<b>0.49</b>	<b>0.49</b>	<b>0.49</b>	<b>0.49</b>	<b>0.58</b>
<b>Functional Units (acreage × actual points)</b>	<b>1.9</b>	<b>1.6</b>	<b>1.9</b>	<b>1.9</b>	<b>2.0</b>

### 2.3.3 Forsyth Northwest – Treasure County Line (Glendive District, Year 5)

The Treasure County Line site is a 5.89-acre site owned by MDT and located approximately 12 miles west of Forsyth at Interstate 94 mile marker 81.75. The site is situated southwest of the intersection of Interstate 94 and Reservation Road in the Lower Yellowstone River-Sunday Creek subbasin and adjacent to an existing wetland complex along Reservation Creek. This site is intended to provide 1.78 acres of compensatory wetland mitigation. Proposed mitigation actions included the following:

- Excavate new wetland area with undulating bottoms
- Create emergent wetland by placing salvaged wetland sod and hydrophytic vegetation within the excavated areas and seeding with wetland grass mix.

The expected wetland community for this site is a palustrine emergent system dominated by herbaceous hydrophytes. Site construction was completed in 1999. Before 2013, this site had not been monitored for regulatory compliance.

The 5.89-acre FNW Treasure County Line mitigation site includes 1.74 acres of created wetland and 4.15 acres of upland buffer. Applying standard wetland compensatory mitigation ratios [USACE, 2005], the site has attained an estimated 2.57 credit acres as demonstrated in Table 2-13.



**Table 2-13. Credit Summary for the Forsyth Northwest – Treasure County Line Site**

Habitat Type	Mitigation Ratio	2014 Delineated Acres	2014 Estimated Credit Acres	2015 Delineated Acres	2015 Estimated Credit Acres	2016 Delineated Acres	2016 Estimated Credit Acres	2017 Delineated Acres	2017 Estimated Credit Acres
Created Wetland	1:1	1.50	1.50	1.67	1.67	1.68	1.68	1.74	1.74
Upland Buffer	5:1	4.39	0.88	4.22	0.84	4.21	0.84	4.15	0.83
<b>Total</b>		<b>5.89</b>	<b>2.38</b>	<b>5.89</b>	<b>2.51</b>	<b>5.89</b>	<b>2.52</b>	<b>5.89</b>	<b>2.57</b>

Results of the 2013 through 2017 functional assessments are summarized in Table 2-14. The total aquatic habitat developed to date within the 5.89-acre project area is 1.74 acres. The FNW Treasure County Line site was evaluated as one AA that encompasses the entire constructed wetland. The AA was rated as a Category III wetland with 59.4 percent of the total possible points and 9.3 functional units. Ratings for general wildlife habitat, production export/food chain support, and uniqueness decreased in 2015 because of the change in disturbance rating from low to moderate. The AA was given a moderate disturbance rating because of the observed moderate grazing that had occurred earlier in the spring of 2016 and 2017. The site received high ratings for short- and long-term surface-water storage, sediment/nutrient/toxicant removal, groundwater discharge/recharge and recreation/education potential, and moderate ratings for MTNHP species habitat, general wildlife habitat, flood attenuation, and production export/food chain support.

**Table 2-14. Montana Wetland Assessment Method Summary for the Forsyth Northwest – Treasure County Line Site From 2013 Through 2017**

Function and Value Parameters From the 2008 Montana Wetland Assessment Method	2013	2014	2015	2016	2017
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
General Wildlife Habitat	Mod (0.7)	High (0.9)	Mod (0.7)	Mod (0.7)	Mod (0.7)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	N/A	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Short- and Long-Term Surface-Water Storage	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Sediment/Shoreline Stabilization	N/A	N/A	N/A	N/A	N/A
Production Export/Food Chain Support	Mod (0.4)	Mod (0.7)	Mod (0.5)	Mod (0.5)	Mod (0.5)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.3)	Mod (0.4)	Low (0.3)	Low (0.3)	Low (0.3)
Recreation/Education Potential (bonus points)	High (0.15)	High (0.15)	High (0.15)	High (0.15)	Mod (0.1)
<b>Actual Points/Possible Points</b>	<b>4.95/8</b>	<b>5.85/8</b>	<b>5.35/9</b>	<b>5.35/9</b>	<b>5.3/9</b>
<b>% of Possible Score Achieved</b>	<b>61.9%</b>	<b>73.1%</b>	<b>59.4%</b>	<b>59.4%</b>	<b>59%</b>
<b>Overall Category</b>	<b>III</b>	<b>II</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries</b>	<b>1.50</b>	<b>1.50</b>	<b>1.67</b>	<b>1.68</b>	<b>1.74</b>
<b>Functional Units (acreage × actual points)</b>	<b>7.4</b>	<b>8.8</b>	<b>8.9</b>	<b>9.0</b>	<b>9.3</b>

Four infestations of Canadian thistle (*Cirsium arvense*), which is a Priority 2B noxious weed, were identified within this site in 2017. These infestations are all located near the center of the site and have a low cover class (1–5 percent cover). No woody vegetation or man-made water-control structures were installed at this site. The fence that surrounds the mitigation area was in good working order when inspected in 2017. Evidence of cattle grazing that occurred earlier in the year was observed during the 2017 field survey.

### 2.3.4 Forsyth Northwest – West (Glendive District, Year 5)

The West mitigation site is a 13.71-acre site owned by MDT and located at the mouth of East Spring Coulee in the floodplain of Big Porcupine Creek. The West site is approximately 1,000 feet from the East site at mile marker 260 on Montana Highway 12. The site is intended to provide 10.38 acres of compensatory wetland mitigation. Approximately 1.29 acres of preexisting wetlands will be preserved at this site. Proposed mitigation actions included the following:

- Excavate new wetland areas with undulating bottoms
- Create emergent wetlands by placing salvaged wetland sod and hydrophytic vegetation within the excavated wetlands and seeding with wetland grass mix
- Construct a water retention dike on the east end of the project site.

The targeted wetland community types included emergent, scrub/shrub, and forested classes dominated by herbaceous hydrophytes, willows, and cottonwoods. Site construction was completed in summer 2012, and the revegetation was completed from August through October 2012.

Approximately 5.89 aquatic habitat acres consisting of approximately 1.29 acres of preexisting wetland habitat and 4.60 acres of recently created wetlands were delineated in 2017. Approximately 7.8 acres of upland habitat was mapped on the site in 2017. Table 2-15 presents the calculated credit acres for individual mitigation types with appropriate credit ratios applied using the USACE crediting system. The FNW West mitigation types and ratios included creation (1:1), preservation (4:1), and upland buffer (5:1). The credit acres accrued at the FNW West site in 2017 totaled 6.48.

**Table 2-15. Credit Summary for the Forsyth Northwest – West Site**

Wetland	Ratio	2014 Delineated Acres	2014 Estimated Credit Acres	2015 Delineated Acres	2015 Estimated Credit Acres	2016 Delineated Acres	2016 Estimated Credit Acres	2017 Delineated Acres	2017 Estimated Credit Acres
Preserved Wetland	4:1	1.29	0.32	1.29	0.32	1.29	0.32	1.29	0.32
Created Wetland	1:1	4.56	4.56	4.72	4.72	4.72	4.72	4.60	4.60
Upland Buffer	5:1	7.86	1.57	7.70	1.54	7.70	1.54	7.82	1.56
<b>Total</b>		<b>13.71</b>	<b>6.45</b>	<b>13.71</b>	<b>6.58</b>	<b>13.71</b>	<b>6.58</b>	<b>13.71</b>	<b>6.48</b>

Results of the 2013 through 2017 functional assessments are summarized in Table 2-16. The FNW West site was evaluated as one AA (AA-1) that encompassed 5.89 acres in 2017. The AA was rated as a Category III wetland in 2017 with 64 percent of the total possible points. Ratings for general wildlife habitat and uniqueness decreased slightly from 2016 because of higher disturbance that

resulted from dike repair at the site in 2017. The site received a high rating for Montana Natural Heritage Program (MTNHP) species habitat based on the presence of grand redstem (*Ammannia robusta*) within the site, which was observed in 2013 and 2014. The site also received high ratings for short- and long-term surface-water storage, production export/food chain support, and recreation/education potential. The site achieved 41.5 functional units in 2017, which is a slight decrease of 4.5 units since 2016. The new dike constructed before the 2017 survey will have a positive effect on wetland development in future years.

**Table 2-16. Montana Wetland Assessment Method Summary for the Forsyth Northwest – West Site From 2013 Through 2017**

Function and Value Parameters From the 2008 Montana Wetland Assessment Method	2013	2014	2015	2016	2017
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Mod (0.5)	Mod (0.7)	E (1)	E (1)	Mod (0.7)
General Fish/Aquatic Habitat	N/A	N/A	Mod (0.4)	Mod (0.4)	Low (0.3)
Flood Attenuation	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (0.9)
Sediment/Nutrient/Toxicant Removal	Mod (0.4)	Mod (0.4)	Mod (0.6)	Mod (0.6)	High (1.0)
Sediment/Shoreline Stabilization	Low (0.3)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.6)
Production Export/Food Chain Support	Mod (0.6)	High (0.9)	High (0.9)	High (0.9)	High (0.8)
Groundwater Discharge/Recharge	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	Mod (0.7)
Uniqueness	Mod (0.4)	Mod (0.5)	Mod (0.6)	Mod (0.6)	Mod (0.4)
Recreation/Education Potential (bonus points)	High (0.15)	High (0.15)	High (0.15)	High (0.15)	High (0.15)
<b>Actual Points/Possible Points</b>	<b>5.45/10</b>	<b>6.75/10</b>	<b>7.65/11</b>	<b>7.65/11</b>	<b>7.05/11</b>
<b>% of Possible Score Achieved</b>	<b>54.5%</b>	<b>67.5%</b>	<b>69.6%</b>	<b>69.6%</b>	<b>64.0%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries</b>	<b>5.44</b>	<b>5.85</b>	<b>6.01</b>	<b>6.01</b>	<b>5.89</b>
<b>Functional Units (acreage × actual points)</b>	<b>29.6</b>	<b>39.5</b>	<b>46.0</b>	<b>46.0</b>	<b>41.5</b>

Infestations of four Priority 2B noxious weeds, Canadian thistle (*Cirsium arvense*), leafy spurge (*Euphorbia esula*), field bindweed (*Convolvulus arvensis*), and salt-cedar (*Tamarix ramosissima*), were mapped in several locations. Canadian thistle was identified in nine locations within the project area. The size of the infestations ranged from less than 0.1 acre to 1 acre with a cover class that ranged from trace (< 1 percent) to high (26–100 percent). Field bindweed was identified in three locations of less than 0.1 acre in size with a trace cover class (< 1 percent). The project area contained five infestations of leafy spurge that ranged from low (less than 0.1 acre) to moderate (0.1–1.0 acre) in size with cover classes of trace (less than 1 percent) to high (26–100 percent). Two infestations of salt-cedar were less than 0.1 acre in size with a trace (< 1 percent) to low cover class (1–5 percent) and were present in the project area. MDT has an ongoing weed-control program that assesses and employs weed-control measures within their wetland mitigation sites on an annual basis.

The dike failure that occurred at the site during high flows in 2013 was repaired by MDT before the 2013 field survey and was intact when inspected in 2013. However, the structure appeared to be

inadequately stabilized and susceptible to future failure. An examination of this structure in June 2014 indicated that the structure failed again during high spring flows, which eroded a channel down to the elevation of the original ephemeral thalweg. The dike was not repaired in 2015. MDT worked with the USACE to facilitate a permanent engineered repair for the dike. Because of this coordination, MDT received a Nationwide Permit (NWP) #3 permit from the USACE to conduct repairs in the fall/winter of 2016/2017. The dike was reconstructed in the late spring of 2017. Fencing around the perimeter of the monitoring areas was in good condition in 2017.

No quantitative performance measures or success criteria were established for this wetland mitigation area. Monitoring requirements that were listed within the approved wetland mitigation plan are being satisfied. In general, the areas that were delineated as wetlands met the criteria for hydrophytic vegetation, hydric soil, and wetland hydrology. Noxious weed cover in 2017 was less than 5 percent site-wide.

#### 2.4 FORT PECK – NORTHEAST (GLEN DIVE DISTRICT, YEAR 1)

The Fort Peck – Northeast wetland mitigation project is located in Section 22, Township 27 North, Range 41 East, Valley County, Montana. This MDT-owned property is located approximately 5 miles north of Fort Peck, Montana, and is adjacent to the Intersection of MT117 and G-C Road. The site is intended to provide 3.41 acres of compensatory wetland mitigation credits for wetland impacts associated with the Fort Peck – Northeast highway reconstruction project and to serve as a mitigation bank for future transportation projects in Watershed #12 – Lower Missouri River. The objectives of this project include establishing (creating) emergent marsh wetlands and providing a protective 50-foot-wide upland buffer around created wetlands.

This 4.52-acre site was selected based on its geomorphic location below a natural terrace and near several small drainage features that flow toward the site. These drainages supply surface runoff from precipitation events at a frequency and duration during the growing season that will encourage wetland development at the site. Hydrology from these natural drainages has historically been used to irrigate the pasture at this location with excess water drained off to the south and east of the site in adjacent roadside ditch wetlands. The clay soils at this site would allow for water collection at peak times of the year and would reduce natural infiltration below the surface. Wetlands existed in the borrow ditches adjacent to the roadway in this area before construction.

Upon completion of the feasibility evaluation of the site, the probability of creating a self-sustaining aquatic resource at this location was determined to likely be very high. Developing an aquatic resource on this site would require a minimum amount of construction and, over the long term, would require minimal maintenance. The favorable soils and the high probability of sufficient hydrology for the site were two of the primary factors in this decision to move forward with mitigation at this location. MDT selected this site for on-site wetland development because no approved wetland mitigation banks are currently within the Watershed #12 – Lower Missouri River Basin.

The project objectives include the following:

- 3.13 acres of emergent marsh wetland will be created by excavating down to the preferred ground elevation in the proposed wetland cell.
- 1.39 acres of upland buffer will be developed along the entire perimeter of the wetland.

2017 was the first year of monitoring at the Fort Peck – Northeast site following construction in the fall of 2015. Table 2-17 summarizes the current estimated wetland credits based on the USACE-approved credit ratios [USACE, 2005] and the wetland delineation that was completed in July 2017. The mitigation area currently supports 2.9 acres of palustrine emergent wetland in the excavated cell and 1.6 acres of upland habitat within a 50-foot buffer of the wetlands. Applying the USACE-approved ratios to these values, a total of 3.22 acres of mitigation credit have already developed, which is just short of the anticipated 3.41 credit acres.

**Table 2-17. Wetland Mitigation Credits Estimated for the Fort Peck – Northeast Site in 2017**

Compensatory Mitigation Type	Mitigation Area Description	Wetland Type <sup>(a)</sup>	Anticipated Mitigation Surface Area (acres)	USACE-Approved Mitigation Ratios	Anticipated Mitigation Credit (acres)	2017 Delineated Acres	2017 Mitigation Credit (acres)
Creation (Establishment)	Depressional wetlands	Palustrine emergent	3.13	1:1	3.13	2.9	2.9
Upland Buffer	50-foot wide upland perimeter	N/A	1.39	5:1	0.28	1.6	0.32
<b>Totals</b>			<b>4.52</b>		<b>3.41</b>	<b>4.5</b>	<b>3.22</b>

(a) Cowardin et al. [1979].

The 2008 MDT MWAM [Berglund and McEldowney, 2008] was used to evaluate the functions and values of the 2.9 acres of developed wetland at the site. Project wetlands received high ratings for short- and long-term surface-water storage and sediment/nutrient/toxicant removal while receiving low to moderate ratings for all other assessed functions and values. These values are provided in Table 2-18.

No diversion structures or nesting structures are currently installed at the site. The fence and access gate that were installed around the site following construction were in good condition at the time of the field survey, and no maintenance is necessary. One small infestation of Canada thistle, which is a Priority 2B noxious weed, was observed along the southern side of the project area between the wetland and the highway. MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds that were identified at each location and treatment to contain and control identified populations.

Table 2-19 provides a summary of the site conditions in relation to the established performance standards and success criteria. Success criteria related to all identified performance standards were being met in the first year of monitoring. All of the performance standards and success criteria will continue to be monitored annually.

**Table 2-18. Functions and Values of the Fort Peck – Northeast Site in 2017**

<b>Function and Value Parameters 2008 MDT Montana Wetland Assessment Method</b>	<b>2017 Wetland Creation</b>
Listed/Proposed T&E Species Habitat	Low (0.0)
Montana Natural Heritage Program (MTNHP) Species Habitat	Low (0.1)
General Wildlife Habitat	Mod (0.4)
General Fish/Aquatic Habitat	N/A
Flood Attenuation	N/A
Short- and Long-Term Surface-Water Storage	High (0.9)
Sediment/Nutrient/Toxicant Removal	High (0.9)
Sediment/Shoreline Stabilization	N/A
Production Export/Food Chain Support	Mod (0.6)
Groundwater Discharge/Recharge	N/A
Uniqueness	Low (0.3)
Recreation/Education Potential	Mod (0.1)
<b>Actual Points/Possible Points</b>	<b>3.3/7.0</b>
<b>% of Possible Score Achieved</b>	<b>47%</b>
<b>Overall Category</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands within Site Boundaries (ac)</b>	<b>2.9</b>
<b>Functional Units (acreage × actual points)</b>	<b>9.57</b>

**Table 2-19. Summary of Performance Standards and Success Criteria for the Fort Peck Northeast Site**

<b>Performance Standards</b>	<b>Success Criteria</b>	<b>Criteria Achieved Y/N</b>	<b>Discussion</b>
Wetland Characteristics	The three parameter criteria for hydrology, vegetation, and soils are met as outlined in the 1987 Wetland Manual and 2010 GP Regional Supplement.	Y	With the introduction of salvaged wetland soil to the excavated depression and the immediate saturation of soil, this mitigation very quickly developed all three wetland parameters.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Soil is sufficiently saturated in the excavated depression to support a prevalence of wetland vegetation.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	Hydric soil was brought in to line the bottom of the excavation, so this criterion has been met.
	Soil is sufficiently stable to prevent erosion.	Y	Soil is very stable; no erosion noted.
	Soil is able to support plant cover.	Y	Plant cover in the wetland exceeded 80% after 1 year.
Hydrophytic Vegetation	Wetlands are delineated as hydrophytic by using technical guidelines.	Y	FAC, FACW and OBL plant species dominate the wetland depression.
	Noxious weeds do not exceed 5 percent cover.	Y	One small infestation of Canada thistle was identified during the 2017 monitoring. Weed cover across the entire site in 2017 is less than 1 percent.
	Hydrophytic vegetation success will include achieving a minimum overall vegetation cover of 80 percent in created wetland areas within 5 years after site construction.	Y	Plant cover in the wetland exceeded 80% after 1 year.
Open Water	This project is meant to provide seasonal open water during the spring and early summer months within this site. Open water will, therefore, be considered successful and creditable as wetland vegetation establishes in the form of either emergent, floating, and/or submerged species of plants.	Y	Standing water was noted at the time of the July 11 field survey as well as during the site visit in September to a maximum depth of 1 foot.

## 2.5 JTX – TUNNICLIFF RANCH (BILLINGS DISTRICT, YEAR 2)

The JTX – Tunnycliff Ranch wetland mitigation project is located in Sections 10 and 15, Township 1 North, Range 33 East, Big Horn County, Montana. This privately owned property is located approximately 4.8 miles north of Hardin, Montana, and is adjacent to the western boundaries of the Montana Fish, Wildlife, and Parks (MFWP) Grant Marsh Wildlife Management Area (WMA) and Fishing Access Site (FAS) along the Bighorn River. The site is intended to provide 29.63 acres of compensatory wetland mitigation credits (Table 2-20) for wetland impacts associated with the proposed Hardin North project and to serve as a mitigation bank for future transportation projects in Watershed #13 – Upper Yellowstone. The objectives of this project include establishing (creating) emergent and scrub/shrub wetlands, riparian floodplain habitat, and a 100-foot-wide upland buffer.

**Table 2-20. Wetland Credit Determination for the JTX – Tunnycliff Ranch Site**

Compensatory Mitigation Type	Mitigation Area Description	Proposed Wetland Type <sup>(a)</sup>	Mitigation Surface Area (acres)	USACE-Approved Mitigation Ratios	Anticipated Mitigation Credit (acres)
<b>Base Bid Credits</b>					
Creation (Establishment)	Depressional wetland	Palustrine emergent and palustrine scrub/shrub	26.85	1:1	26.85
Creation (Reestablishment)	Woody plant enclosures	Palustrine scrub/shrub	2.73	5:1	0.55
Upland buffer	100-foot wide perimeter	N/A	10.98	5:1	2.20
Preservation	Pre-project wetlands	Palustrine emergent	0.03	1:1	0.03
Temporary impacts	N/A	N/A	0.00	None	0.00
<b>Total Mitigation Credit</b>					<b>29.63</b>

(a) Cowardin et al. [1979].

The JTX – Tunnycliff Ranch site is a 50-acre parcel of land within the larger JTX – Tunnycliff Ranch property. The landowner contacted MDT with an interest in possibly using a portion of his ranch to serve as a compensatory wetland mitigation site. MDT staff met with the landowner in the fall of 2011. MDT staff then conducted on-site field investigations in the spring of 2012 with the staff from the USACE Billings office to assess the potential for developing a wetland mitigation site on the ranch. This proposed mitigation area is approximately 50 acres in size, and topographically, the property was previously graded for agricultural production, and a series of irrigation and lateral ditches had been constructed across the site. Three irrigation supply ditches and as many as nine lateral distribution ditches formerly ran through the site before construction. The entire parcel is fenced and has access gates in the northeastern and southeastern corners of the site.

The intent of the project is to create and restore the site similar to a riparian floodplain wetland ecosystem that has relic river channel depressional wetlands and woody riparian buffer habitat found within the southern portions of the JTX – Tunnycliff Ranch site and at the Grant Marsh FAS/WMA within



the Bighorn River valley. Specifically, the wetland project was designed to restore the riparian wetland habitat that had been converted to farmland; improve wildlife habitat diversity within the property; increase potential flood and stormwater retention within the Bighorn River floodplain; and increase the wetland/riparian floodplain habitats within the Bighorn River Watershed.

The project objectives as described in the *JTX-Tunnickliff Final Wetland Mitigation Plan, Watershed #14 – Middle Yellowstone River Basin, Big Horn County, Montana* [MDT, 2015] include creating the following:

- 26.85 acres of depressional emergent and scrub/shrub wetlands that will be seasonally inundated by groundwater and flood events from the adjacent Bighorn River. Thirteen small excavated depressions, which range in surface area from 0.33 to 1.50 acres, were designed to mimic relic river/flood channels that are found along many natural riverine systems. Average water depths within these excavated depressions is anticipated to be between 0.0 and 1.0 foot, with some small, deeper 1.0- to 2.0-foot pools. A variety of emergent hydrophytes is expected to establish in these depressions and along the seasonally inundated and saturated margins adjacent to the depressions.
- 2.73 acres of scrub/shrub wetland and riparian habitat is anticipated to develop around the drier perimeter of these excavated depressions that will be subject to seasonal high-water levels in the spring, because of late-summer irrigation, and during flood events along the Bighorn River. As part of the project, eight woody plant enclosures are planned for areas adjacent to the created wetlands cells in an effort to promote woody plant development within the site.
- A total of 0.03 acre of existing wetland will be preserved on the site.
- A total of 10.98 acres of upland buffer will be developed along the entire perimeter of the site; this area will also be planted with native herbaceous species commonly found within the riparian areas in the Bighorn River valley.

2017 was the second year of monitoring at the JTX – Tunnickliff site. The JTX – Tunnickliff Ranch site did not develop any wetlands during the first growing season after construction, which concluded during the winter of 2016. At the time of the 2017 monitoring event, 3.86 acres of wetland habitat had been created within excavated wetland cells. Table 2-21 summarizes the current estimated wetland credits based on the USACE-approved credit ratios [USACE, 2005] and the wetland delineation that was completed in July 2017.

Table 2-21. Wetland Mitigation Credits Estimated for the JTX – Tunnichliff Ranch Site in 2016 and 2017

Compensatory Mitigation Type	Mitigation Area Description	Wetland Type <sup>(a)</sup>	Anticipated Mitigation Surface Area (acres)	USACE-Approved Mitigation Ratios	Anticipated Mitigation Credit (acres)	2016 Delineated Acres	2016 Mitigation Credit (acres)	2017 Delineated Acres	2017 Mitigation Credit (acres)
Creation (Establishment)	Depressional wetlands	Palustrine emergent and palustrine scrub/shrub	26.85	1:1	26.85	0.0	0.0	3.86	3.86
Creation (Reestablishment)	Woody plant enclosures	Palustrine scrub/shrub	2.73	5:1	0.55	2.3	0.5	2.33	0.47
Preservation	Pre-project Wetlands	Palustrine Emergent	0.03	1:1	0.03	0.03	0.03	0.03	0.03
Upland Buffer	100-foot wide upland perimeter	N/A	10.98	5:1	2.2	0.0	0.0	13.32	2.66
<b>Totals</b>			<b>40.6</b>		<b>29.63</b>	<b>2.3</b>	<b>0.5</b>	<b>19.51</b>	<b>7.02</b>

(a) Cowardin et al. [1979].

The 2017 results of the functional assessments are summarized in Table 2-22. The site was evaluated as one AA and encompassed 3.86 acres. This site achieved 44 percent of the possible score and 15.3 functional units in 2017. As deep-rooted wetland vegetation continues to develop, ratings are expected to increase from moderate to high for several of the function and value variables.

**Table 2-22. Montana Wetland Assessment Method Summary for the JTX – Tunnickliff Ranch Site in 2017**

Function and Value Parameters From the 2008 Montana Wetland Assessment Method	2017
Listed/Proposed T&E Species Habitat	Low (0.0)
Montana Natural Heritage Program (MTNHP) Species Habitat	Low (0.1)
General Wildlife Habitat	Mod (0.4)
General Fish/Aquatic Habitat	N/A
Flood Attenuation	Mod (0.5)
Short- and Long-Term Surface-Water Storage	Mod (0.6)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)
Sediment/Shoreline Stabilization	N/A
Production Export/Food Chain Support	Mod (0.4)
Groundwater Discharge/Recharge	Mod (0.7)
Uniqueness	Mod (0.4)
Recreation/Education Potential (bonus points)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>4.0/9</b>
<b>% of Possible Score Achieved</b>	<b>44%</b>
<b>Overall Category</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries</b>	<b>3.86</b>
<b>Functional Units (acreage × actual points)</b>	<b>15.3</b>

No man-made water-control structures were installed within the JTX – Tunnickliff Ranch site. The perimeter fence that was installed around the site was in good condition at the time of the 2017 investigation. Seven bluebird boxes were installed on the site, and all appeared to be in good condition.

Three infestations of state-listed Priority 2B noxious weeds were mapped at the JTX – Tunnickliff Ranch site (Figure A-3, Appendix A). MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds that were identified at each location and treatment to contain and control identified populations. The number of noxious weed species and cover has decreased since 2016 because of weed-control measures conducted by the MDT in 2017.

## 2.6 KINDSFATER WETLAND (BILLINGS DISTRICT, YEAR 5)

The Kindsfater wetland mitigation project is located in the northwest quarter of Section 6, Township 2 South, Range 25 East, Yellowstone County, Montana. The property is located approximately 3 miles northeast of Laurel, Montana, and is adjacent to 72<sup>nd</sup> Street West and Laurel Airport Road. The wetland mitigation site is intended to provide 43.8 acres of wetland mitigation credits to assist the MDT in meeting compensatory mitigation requirements for proposed construction projects in Watershed #13 – Upper Yellowstone. The Kindsfater project and proposed crediting as presented in the August 2012 Kindsfater wetland mitigation plan was approved by USACE permit #NWO-2007-

00824-MTB. The objectives of this project included creating, restoring, enhancing, and preserving wetland habitat within the historic Kindsfater gravel pit.

The Kindsfater site was previously a gravel mining operation; mining operations ceased in 1987. The excavations from mining exposed groundwater throughout the site. Eventually, the site evolved into a wetland complex that included emergent, scrub/shrub, and forested wetland habitats. The site was identified in 2002 as a potential wetland restoration site and evaluated by Carter Burgess, Inc. (CB) to determine the practicality of developing wetland mitigation credits. A wetland delineation conducted by CB in 2002 identified 47.6 acres within the site. In 2006, Morrison-Maierle, Inc. (MMI) delineated wetlands within the site and identified 32.9 acres of emergent, scrub/shrub, and forested wetlands. In 2012, MMI redelineated the site to verify the wetland acreage and identified a total of 25.9 acres of wetlands on the site. Based on these findings, approximately 22 acres of wetland habitat has converted to upland between 2002 and 2012.

The project design includes two phases of development: the Base Project and the Alternative Option. The Base Project involves creating, restoring, enhancing, and preserving wetlands within the western half of the site. The Alternative Option includes excavating and removing gravel materials and constructing new wetlands within the eastern half of the site. Credits to be developed because of both phases would total 43.8 under full build-out. Currently, the Base Project and a portion of the Alternative Option have been constructed. The 11.1 acres wetlands to be created within the gravel mining area were not completed, reducing the project's expected credits to 32.7.

Table 2-23 summarizes the current estimated wetland credits based on the USACE-approved credit ratios and the wetland delineation completed in June 2017. Mitigation areas delineated at the Kindsfater site in 2017 include 2.0 acres of creation, 6.8 acres of reestablishment, 1.0 acre of rehabilitation, 3.0 acres of enhancement, 20.5 acres of wetland preservation, and 4.5 acres (22.6 acres within 50-foot buffer) of upland buffer. Applying the USACE-approved ratios to these values, a total of 20.1 acres of mitigation credit have been estimated in 2017, a value well below the targeted 32.7 acres anticipated at this site. Although 2017 represents only the fifth year of monitoring, the attainment of the full target value of 32.7 credit acres may prove difficult without an increase of groundwater or supplemental water into the mitigation area.

The 2008 MDT MWAM [Berglund and McEldowney, 2008] was used to evaluate two general AAs (Table 2-24). The AAs were generally separated by creation, and preexisting wetland areas are described below.

**Table 2-23. Wetland Mitigation Credits Estimated for the Kindsfater Site From 2014 Through 2017**

Compensatory Mitigation Type	Mitigation Area Description	Wetland Type [Cowardin]	Anticipated Mitigation Surface Area (acres)	USACE-Approved Mitigation Ratios	Anticipated Mitigation Credit (acres)	2014 Delineated Acres	2014 Mitigation Credit (acres)	2015 Delineated Acres	2015 Mitigation Credit (acres)	2016 Delineated Acres <sup>(a)</sup>	2016 Mitigation Credit (acres)	2017 Delineated Acres <sup>(c)</sup>	2017 Mitigation Credit (acres)
Creation (Establishment)	Wetland Cells 7, 9, 13, and 14	Lacustrine emergent	4.6	1:1	4.6	1.8	1.8	1.8	1.8	2.0	2.0	2.2	2.0
Restoration (Reestablishment)	Wetland Cells 1–6 and parts of Cell 8	Lacustrine emergent and Palustrine emergent, scrub/shrub	14.0	1:1	14.0	7.9	7.9	7.9	7.9	7.8	7.8	6.8	6.8
Restoration (Rehabilitation)	Areas adjacent to Wetland Cells 1–12	Palustrine emergent, scrub/shrub	9.2	1.5:1	6.1	0.9	0.6	0.9	0.6	0.9	0.6	1.0	0.7
Enhancement	Wetland Cells 10–12 and parts of Cell 8	Palustrine emergent, scrub/shrub	3.1	3:1	1.0	3.0	1.0	3.0	1.0	3.4	1.1	3.0	1.0
Preservation	Existing wetland areas	Palustrine emergent, scrub/shrub	21.9	4:1	5.5	21.3	5.3	21.3	5.3	20.3	5.1	20.5	5.1
Upland Buffer	50-foot-wide upland perimeter	N/A	7.3	5:1	1.5	22.8	4.56 <sup>(c)</sup>	22.9	4.6 <sup>(c)</sup>	22.6	4.52 <sup>(c)</sup>	22.6	4.5
<b>Totals</b>			<b>60.1</b>		<b>32.7<sup>(d)</sup></b>	<b>57.7</b>	<b>21.1</b>	<b>57.8</b>	<b>21.2</b>	<b>57.0</b>	<b>21.1</b>	<b>56.1</b>	<b>20.1</b>

- (a) The 2016 credit acres were derived from dgn provided by MDT (5034000ENDEZ01.DGN). A shapefile of the credit areas (MDT\_Crediting\_polys.shp) was created in and exported from Autodesk Civild 3D, then overlaid with the 2016 delineated wetland boundaries in ArcMap and calculated acreages.
- (b) Estimated credit acres for upland buffer included the 1.46 acres anticipated in the USACE-approved mitigation plan.
- (c) Value calculated using GIS.
- (d) 11.1 acres of creation wetlands in the Alternative Bid Credits (gravel mining area) were not constructed as planned; the anticipated credits for this gravel mining area have been subtracted to indicate this reduction in credits.

Table 2-24. Functions and Values of the Kindsfater Site From 2013 Through 2017

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method	2013 AA 1 (Existing Wetlands)	2014 AA 1 (Existing Wetlands)	2015 AA 1 (Existing Wetlands)	2016 AA 1 (Existing Wetlands)	2017 AA 1 (Existing Wetlands)	2013 AA 2 (Created Wetlands)	2014 AA 2 (Created Wetlands)	2015 AA 2 (Created Wetlands)	2016 AA 2 (Created Wetlands)	2017 AA 2 (Created Wetlands)
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
Montana Natural Heritage Program (MTNHP) Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Mod (0.5)	Mod (0.5)	Low (0.3)	Low (0.3)	Low (0.3)	Mod (0.5)	Mod (0.5)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Short- and Long-Term Surface-Water Storage	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	Mod (0.6)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
Sediment/Nutrient/Toxicant Removal	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	Mod (0.5)	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Production Export/Food Chain Support	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.8)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Mod (0.4)
Groundwater Discharge/Recharge	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.3)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.2)	Low (0.3)
Recreation/Education Potential	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>4.7/8</b>	<b>4.7/8</b>	<b>4.7/8</b>	<b>4.9/8</b>	<b>5.2/8</b>	<b>3.7/8</b>	<b>3.6/8</b>	<b>3.9/8</b>	<b>4.1/8</b>	<b>4.3/8</b>
<b>% of Possible Score Achieved</b>	<b>59%</b>	<b>59%</b>	<b>59%</b>	<b>61%</b>	<b>65%</b>	<b>46%</b>	<b>45%</b>	<b>49%</b>	<b>51%</b>	<b>54%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands within Site Boundaries (acres)</b>	<b>33.7</b>	<b>33.1</b>	<b>33.1</b>	<b>32.4</b>	<b>31.2</b>	<b>1.8</b>	<b>1.8</b>	<b>1.8</b>	<b>2.0</b>	<b>2.2</b>
<b>Functional Units (acreage × actual points)</b>	<b>158.44</b>	<b>155.57</b>	<b>155.57</b>	<b>152.28</b>	<b>162.29</b>	<b>6.55</b>	<b>6.37</b>	<b>7.02</b>	<b>8.2</b>	<b>9.46</b>

The Existing Wetland AA included 33.10 acres of preexisting wetland habitat identified in the 2012 wetland delineation conducted by MMI. This AA included 20.3 acres of preservation wetland habitat, 8.70 acres of restoration habitat, and 3.4 acres of enhancement habitat. The Existing Wetland AA was rated as a Category III wetland and scored 65 percent of the possible points and 162.29 functional units. Primary habitat for the plains spadefoot was observed in this AA, which also received high ratings for short- and long-term surface-water storage, sediment/nutrient/toxicant removal and recreation/education potential.

The Created Wetlands AA encompassed 2.2 acres of constructed palustrine, emergent wetlands and included Cells 9, 13 and 14 and a portion of Cell 7. This AA rated as a Category III wetland with 54 percent of the possible score and 9.46 functional units. The AA rated high for MTNHP species habitat owing to the documented primary habitat of the Plains Spadefoot (S3). High marks were also received for the recreation/education potential. The rating for this AA is expected to increase as the disturbed areas recover and develop a more extensive vegetation cover.

Table 2-25 provides a summary of the site conditions in relation to the established performance standards and success criteria. All wetlands delineated within the Kindsfater site in 2017 met the three criteria outlined in the 1987 Wetland Manual and 2010 GP Regional Supplement. Wetland creation areas exhibited more than 5 percent cover from noxious weeds. In total, restored, created, enhanced, and preserved wetlands exhibited less than 80 percent desirable hydrophytic vegetation cover during the 2017 monitoring event. These areas generally showed increased in overall vegetation cover and are anticipated to meet these criteria within 5 years post-construction. Approximately 10 percent of the planted woody vegetation survived through 2017. Fencing has been installed around the perimeter of the easement area to protect the site from disturbance. Within the upland buffer, noxious weed cover has exceeded 5 percent. MDT implements weed-control measures based on the results of field surveys to minimize and/or eliminate the intrusion of state-listed noxious weed species within the site. Monitoring of this MDT mitigation site will be conducted for a minimum period of 5 years as determined by the USACE Montana Regulatory Office's review of annual monitoring reports for the site and attainment of wetland success criteria.

No man-made water-control structures were installed within the Kindsfater site. The perimeter fence that was installed around the site was in good working order at the time of the 2017 investigation. Two bluebird boxes were installed on the site. The two trees that the bird boxes were mounted had fallen over before the 2017 survey, which rendered the boxes unusable. This site appears to be used by a high number of people for diverse recreational activities; some refuse is present and should be cleaned up to protect the integrity of the site.

Ten infestations of state-listed Priority 2B noxious weeds were mapped at the Kindsfater site. Four infestations of Canada thistle, two infestations of leafy spurge, and four infestations of field bindweed were identified with cover classes that ranged from low (1–5 percent) to moderate (6–25 percent). Additionally, great mullein (a Yellowstone County noxious weed) was observed in a few areas across portions of community Type 6 – *Elymus trachycaulus/Bromus* spp.

**Table 2-25. Summary of Performance Standards and Success Criteria Compared to Existing Site Conditions (Page 1 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Wetland Characteristics	The three parameter criteria for hydrology, vegetation, and soils are met as outlined in the 1987 Wetland Manual and 2010 GP Regional Supplement.	Y	Areas that were identified as wetland habitat within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Areas that were identified as wetland habitat within the mitigation site exhibit soil saturation for a minimum 12.5 percent of growing season.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	The recently constructed wetland complex exhibits weak hydric soil development, including faint redoximorphic concentrations observed within several of the excavated depressions. Preexisting hydric soil characteristics are present in several areas identified as wetland before project construction.
	Soil is sufficiently stable to prevent erosion.	Y	Disturbed soil is stable and does not exhibit signs of erosion.
	Soil is able to support plant cover.	Y	Plant cover has continued to develop across disturbed soils.
Hydrophytic Vegetation	Wetlands are delineated as hydrophytic by using technical guidelines.	Y	Areas that were identified as wetland habitat within the mitigation site support a prevalence of hydrophytic vegetation (OBL, FACW, and FAC).
	Noxious weeds do not exceed 5 percent cover.	Y	Although several noxious weed infestations have been mapped across this site, the infestations are generally located outside of excavated/created wetlands. Overall, the estimated noxious weed cover across all of the delineated wetlands is less than 5 percent.
	Hydrophytic vegetation success will include achieving a minimum overall vegetation cover of 80 percent in all wetland areas at the conclusion of the monitoring period.	N	In total, restored, created, enhanced, and preserved wetlands exhibited less than 80 percent desirable hydrophytic vegetation cover during the 2017 monitoring event. These areas generally showed increased overall vegetation cover and are anticipated to meet these criteria within the near future.
Woody Plants	Plantings exceed 50 percent survival after 5 years.	N	Approximately 10 percent of the woody plantings observed were alive in 2017, which does not meet the 50 percent survival criterion. However, several wetland cells exhibit at least 45 percent cover by volunteer woody species which are expected to continue expanding across the site. This cover value of volunteer woody species has been included in the success criteria determination for this performance criteria and almost meets the 50 percent threshold.
Open-Water Areas	Open water that is established within the designated wetland cells will be considered successful and creditable.	N/A	Although inundation was observed during the 2017 monitoring event, one very small area of open water was noted within the Kindsfater site but not mapped (approximately 5 feet x 5 feet in size).



**Table 2-25. Summary of Performance Standards and Success Criteria Compared to Existing Site Conditions (Page 2 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Upland Buffer	Noxious weeds do not exceed 5 percent cover within the buffer areas on site.	Y	Noxious weed infestations, including field bindweed, leafy spurge, and Canada thistle have been mapped within the site but do not exceed 5 percent. MDT will continue to implement weed-control measures to maintain this criterion.
	Any disturbed area within the creditable buffer zone must have at least 50 percent aerial cover of nonweed species by the end of the monitoring period.	Y	Upland buffers surround wetland areas within the site exhibited greater than 50 percent aerial cover of nonweed species.
Weed Control	Less than 5 percent absolute cover of noxious weed species occurs across the site.	Y	The estimated coverage of noxious weeds within the constructed wetlands is generally below 5 percent, state-listed noxious weed species across the entire site have been estimated at less than 5 percent absolute cover in 2017.
Fencing	Wildlife-friendly fencing is installed along the easement boundaries.	Y	Wildlife-friendly fencing has been installed around the easement boundaries and is in good condition.

The overall extent of weed infestations observed in 2017 does not exceed the success criterion for weed populations at 5 percent site-wide. A weed contractor with MDT treated this site in 2012 before construction. MDT's weed contractor treated the site on July 11, 2017, and concentrated on areas of infestations by Canada thistle, leafy spurge, field bindweed, mullein, and gypsy-flower. MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds identified at each location and treatment to contain and control identified populations.

## 2.7 MCGINNIS MEADOWS (MISSOULA DISTRICT, YEAR 8)

The McGinnis Meadows wetland mitigation project is located in Section 33, Township 26 North, Range 28 West, Lincoln County, Montana. McGinnis Meadows is located approximately 7 miles south of the US Highway 2 corridor on two parcels that encompass 33 acres of a historic hay field and pasture. McGinnis Creek is a tributary to the Fisher River and bisects the parcels. This project lies within Watershed #1 – the Kootenai River Basin.

Wetlands that developed at this location provide compensatory mitigation for wetland impacts associated with transportation projects in the Missoula District. The McGinnis Meadows site was selected after an extensive search of potential wetland and stream restoration sites by MDT within the Kootenai River Watershed in cooperation with a consortium of conservation districts known as Montana Watersheds Incorporated (MWI). The consortium consisted of the Lincoln, Sanders, and Flathead County Conservation Districts with technical assistance from the US Department of Agriculture (USDA) Natural Resource Conservation Service Centers (NRCS) in Bozeman, Kalispell, Libby, and Eureka. The wetland and stream restoration project will ultimately aid in improving the flood storage, stream length, and fisheries habitat of McGinnis Creek, as well as improve the overall wildlife, riparian, and wetland habitats impacted by past agricultural practices within the McGinnis Creek Watershed.

Goals that were established in 2009 for the McGinnis Meadows mitigation project included restoring approximately 0.8 acre of riparian/stream habitat on McGinnis Creek and 17.3 acres of degraded wetlands. Credit was to be awarded for creating 2.9 acres of emergent wetlands and enhancing 1.74 acres of existing emergent wetland and an intermittent drainage. Preserving 0.3 acre of existing riparian communities along the abandoned McGinnis Creek corridor and maintaining 2.2 acres of upland buffer provided additional wetland credits. Table 2-26 details the project credit ratios approved by the USACE and the calculated credit acreages from 2011 through 2017. Total wetland mitigation credits that were calculated for the McGinnis Meadows site in 2017 were 20.48 credit acres, which is an increase of 0.9 credit acre since 2014.

The acreage of the created wetland cells has exceeded the anticipated 2.90 acres proposed in the 2009 MDT mitigation plan by 5.7 acres. The credit for the excavated wetland depressions was estimated at 8.6 credit acres in 2017 based on a 1:1 creation-to-impact credit ratio.

Approximately 16.6 acres of wetland were delineated within the restoration (rehabilitation) AA in 2017. The restored area included the preexisting, impaired reed canary grass and field meadow foxtail of wetland community Type 7 – *Phalaris/Alopecurus* as well as several restored wetland cells characterized by community Type 19 – *Carex* spp. The estimated credit acres for the restoration areas was 11.07 in 2017. The approved 0.30 acreage presented in the mitigation plan was used to calculate the preservation credit estimate. Preservation credits were 0.08 acre in 2017 based on a 4:1 preservation-to-impact ratio.

The Enhancement AA included the existing emergent wetland located along the south and southwest boundary of the property, upgradient from the channel restoration area. The 2017 wetland delineation identified 0.90 acre within the Enhancement AA. This number is lower than previous years because of corrections made to the area identified as the Enhancement AA based on the georeferenced conceptual plan. The 2011 through 2013 wetland delineation identified 1.32 acres of wetland within this AA. The wetland delineation in 2014 defined 1.74 wetland acres in this AA. However, after overlying the delineated wetland map onto the georeferenced conceptual plan, a portion of the wetland that had been applied to the Enhancement credit scheme fell within the Creation credit area. Applying the USACE-approved 3:1 credit ratio to this area netted 0.3 acre of wetland credit in 2016, which is a decrease of 0.28 acre since 2014. The remaining portion of the wetland acres were applied to the Creation credit acres.

The restored McGinnis Creek channel encompassed 0.75 acre of riverine habitat that bisects the site. MDT seeks to obtain approximately 8,835 stream credits for restoring 2,850 linear feet of McGinnis Creek associated with the area below the ordinary high-water mark (OHWM) of the channel. This acreage was excluded from the wetland credit totals. MDT and the USACE will calculate the stream credits separately after monitoring has been concluded.

Functional assessments were completed on four AAs from 2010 through 2017 using the 2008 MWAM (Table 2-27). The four AAs were divided into creation (excavated cells – 8.60 acres), restoration (reestablishment and rehabilitation – 16.60 acres), enhancement (existing emergent wetland – 0.90 acre), and preservation (existing riverine wetlands – 0.30 acre).

Table 2-26. Summary of Wetland Credits at the McGinnis Meadows Site From 2011 Through 2017 (Page 1 of 2)

Proposed Mitigation Activity	Compensatory Mitigation Type	USACE Mitigation Ratios	Proposed Acres	Final Credit Estimate (acres)	2011 Delineated Acreage	2011 Credit (acres)	2012 Delineated Acreage	2012 Credit (acres)	2013 Delineated Acreage	2013 Credit (acres)	2014 Delineated Acreage	2014 Credit (acres)
Creating palustrine emergent depression wetlands through shallow excavation	Creation	1:1	2.90	2.90	6.42	6.42	6.42	6.42	6.42	6.42	6.42	6.42
Restoring/ Reestablishing the McGinnis Creek channel and wetland fringe	Restoration (Reestablishment)	1:1	0.80	0.80	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>
Rehabilitating existing impaired wet meadow wetlands	Restoration (Rehabilitation)	1.5:1	17.30	11.53	12.60	8.40	17.08	11.39	17.34	11.56	18.09	12.06
Enhancing existing emergent wetland upgradient of channel restoration	Enhancement	3:1	1.74	0.58	1.32	0.44	1.32	0.44	1.32	0.44	1.74	0.58
Preserving existing wetlands within abandoned McGinnis Creek reaches	Preservation	4:1	0.30	0.08	0.30	0.08	0.30	0.08	0.30	0.08	0.30	0.08
Maintaining upland buffer averaging 50 feet in length on-site perimeter	Upland Buffer	5:1	2.20	0.44	2.20	0.44	2.20	0.44	2.20	0.44	2.20	0.44
<b>Total</b>				<b>16.33</b>	<b>22.84</b>	<b>15.78</b>	<b>27.32</b>	<b>18.77</b>	<b>27.58</b>	<b>18.94</b>	<b>28.75</b>	<b>19.58</b>

**Table 2-26. Summary of Wetland Credits at the McGinnis Meadows Site From 2010 Through 2016 (Page 2 of 2)**

Proposed Mitigation Activity	Compensatory Mitigation Type	USACE Mitigation Ratios	Proposed Acres	Final Credit Estimate (acres)	2015 Delineated Acreage	2015 Credit (acres)	2016 Delineated Acreage	2016 Credit (acres)	2017 Delineated Acreage	2017 Credit (acres)
Creating palustrine emergent depression wetlands through shallow excavation	Creation	1:1	2.90	2.90	8.60	8.60	8.60	8.60	8.60	8.60
Restoring/Reestablishing the McGinnis Creek channel and wetland fringe	Restoration (Reestablishment)	1:1	0.80	0.80	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>	0.75 <sup>(a)</sup>
Rehabilitating existing impaired wet meadow wetlands	Restoration (Rehabilitation)	1.5:1	17.30	11.53	16.60	11.07	16.60	11.07	16.60	11.07
Enhancing existing emergent wetland upgradient of channel restoration	Enhancement	3:1	1.74	0.58	0.90	0.30	0.90	0.30	0.90	0.30
Preserving existing wetlands within abandoned McGinnis Creek reaches	Preservation	4:1	0.30	0.08	0.30	0.08	0.30	0.08	0.30	0.08
Maintaining upland buffer averaging 50 feet in length on-site perimeter	Upland Buffer	5:1	2.20	0.44	2.20	0.44	2.20	0.44	2.20	0.44
<b>Total</b>				<b>16.33</b>	<b>28.60</b>	<b>20.48</b>	<b>28.60</b>	<b>20.48</b>	<b>28.60</b>	<b>20.48</b>

(a) Stream credit being sought for McGinnis Creek; acreage excluded from total.

Table 2-27. Functions and Values at the McGinnis Meadows Site From 2010 Through 2017 (Page 1 of 4)

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2010 Creation (excavated cells)	2011 Creation (excavated cells)	2012 Creation (excavated cells)	2013 Creation (excavated cells)	2014 Creation (excavated cells)	2015 Creation (excavated cells)	2016 Creation (excavated cells)	2017 Creation (excavated cells)
Listed/Proposed T&E Species Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
Montana Natural Heritage Program (MTNHP) Species Habitat	Low (0.1)	Low (0.1)	Low (0.2)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
General Wildlife Habitat	Low (0.3)	High (0.9)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	Low (0.3)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	NA	Mod (0.7)	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/Food Chain Support	Low (0.3)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Groundwater Discharge/Recharge	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.1)	Mod (0.4.)	Mod (0.4.)	Mod (0.4.)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential (bonus points)	Low (0.05)	High (0.15)	High (0.20)	High (0.20)	High (0.20)	High (0.20)	High (0.20)	High (0.20)
<b>Actual Points/Possible Points</b>	<b>3.45/9</b>	<b>6.65/10</b>	<b>6.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>
<b>% of Possible Score Achieved</b>	<b>38.3</b>	<b>66.5</b>	<b>69.0</b>	<b>79.0</b>	<b>79.0</b>	<b>79.0</b>	<b>79.0</b>	<b>79</b>
<b>Overall Category</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>0.20</b>	<b>6.42</b>	<b>6.42</b>	<b>6.42</b>	<b>6.42</b>	<b>8.60</b>	<b>8.60</b>	<b>8.6</b>
<b>Functional Units (acreage × actual points)</b>	<b>0.69</b>	<b>42.69</b>	<b>44.30</b>	<b>50.72</b>	<b>50.72</b>	<b>67.94</b>	<b>67.94</b>	<b>67.94</b>

Table 2-27. Functions and Values at the McGinnis Meadows Site From 2010 Through 2017 (Page 2 of 4)

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2011 Restoration (reestablishment and rehabilitation–existing wet meadow)	2012 Restoration (reestablishment and rehabilitation–existing wet meadow)	2013 Restoration (reestablishment and rehabilitation–existing wet meadow)	2014 Restoration (reestablishment and rehabilitation–existing wet meadow)	2015 Restoration (reestablishment and rehabilitation–existing wet meadow)	2016 Restoration (reestablishment and rehabilitation–existing wet meadow)	2017 Restoration (reestablishment and rehabilitation–existing wet meadow)
Listed/Proposed T&E Species Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
MTNHP Species Habitat	Mod (0.6)	Mod (0.6)	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
General Wildlife Habitat	High (0.9)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)
General Fish/Aquatic Habitat	High (0.8)	High (0.8)	High (0.8)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Flood Attenuation	High (0.8)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)
Short- and Long-Term Surface-Water Storage	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Nutrient/ Toxicant Removal	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Sediment/Shoreline Stabilization	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/Food Chain Support	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential (bonus points)	High (0.15)	High (0.20)	High (0.20)	High (0.20)	High (0.20)	High (0.20)	High (0.20)
<b>Actual Points/Possible Points</b>	<b>8.55/11</b>	<b>8.70/11</b>	<b>8.80/11</b>	<b>9.0/11</b>	<b>9.0/11</b>	<b>9.0/11</b>	<b>9.0/11</b>
<b>% of Possible Score Achieved</b>	<b>77.7</b>	<b>79.1</b>	<b>80.0</b>	<b>81.8</b>	<b>81.8</b>	<b>81.8</b>	<b>81.8</b>
<b>Overall Category</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>I</b>	<b>I</b>	<b>I</b>	<b>I</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>12.60</b>	<b>17.08</b>	<b>17.34</b>	<b>18.09</b>	<b>16.60</b>	<b>16.60</b>	<b>16.6</b>
<b>Functional Units (acreage x actual points)</b>	<b>107.73</b>	<b>148.60</b>	<b>152.59</b>	<b>162.81</b>	<b>149.40</b>	<b>149.40</b>	<b>149.4</b>

**Table 2-27. Functions and Values at the McGinnis Meadows Site From 2010 Through 2017 (Page 3 of 4)**

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2010 Enhancement (existing emergent wetland)	2011 Enhancement (existing emergent wetland)	2012 Enhancement (existing emergent wetland)	2013 Enhancement (existing emergent wetland)	2014 Enhancement (existing emergent wetland)	2015 Enhancement (existing emergent wetland)	2016 Enhancement (existing emergent wetland)	2017 Enhancement (existing emergent wetland)
Listed/Proposed T&E Species Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
MTNHP Species Habitat	Low (0.1)	Low (0.1)	Low (0.2)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
General Wildlife Habitat	Mod (0.5)	Mod (0.5)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	Mod (0.7)	N/A	N/A	N/A
Flood Attenuation	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	Low (0.3)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Sediment/Shoreline Stabilization	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Production Export/Food Chain Support	Mod (0.4)	Low (0.3)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)
Groundwater Discharge/Recharge	Mod (0.7)	N/A	N/A	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)
Uniqueness	Low (0.3)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential (bonus points)	Low (0.05)	High (0.15)	High (0.20)	High (0.20)	High (0.20)	High (0.20)	High (0.20)	High (0.20)
<b>Actual Points/Possible Points</b>	<b>4.25/9</b>	<b>3.25/8</b>	<b>4.0/8</b>	<b>4.5/9</b>	<b>5.2/9</b>	<b>4.5/9</b>	<b>4.5/9</b>	<b>4.5/9</b>
<b>% of Possible Score Achieved</b>	<b>47.2</b>	<b>40.6</b>	<b>50.0</b>	<b>50.0</b>	<b>57.8</b>	<b>54.0</b>	<b>54.0</b>	<b>54</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>1.74</b>	<b>1.32</b>	<b>1.32</b>	<b>1.32</b>	<b>1.74</b>	<b>0.90</b>	<b>0.90</b>	<b>0.90</b>
<b>Functional Units (acreage x actual points)</b>	<b>7.40</b>	<b>4.29</b>	<b>5.28</b>	<b>5.94</b>	<b>9.05</b>	<b>4.05</b>	<b>4.05</b>	<b>4.05</b>

**Table 2-27. Functions and Values at the McGinnis Meadows Site From 2010 Through 2017 (Page 4 of 4)**

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2010 Preservation (existing riverine wetlands)	2011 Preservation (existing riverine wetlands)	2012 Preservation (existing riverine wetlands)	2013 Preservation (existing riverine wetlands)	2014 Preservation (existing riverine wetlands)	2015 Preservation (existing riverine wetlands)	2016 Preservation (existing riverine wetlands)	2017 Preservation (existing riverine wetlands)
Listed/Proposed T&E Species Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
MTNHP Species Habitat	Low (0.1)	Low (0.1)	Low (0.2)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
General Wildlife Habitat	Mod (0.7)	High (0.9)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)	Exc (1.0)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
Short- and Long-Term Surface-Water Storage	Mod (0.4)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/ Food Chain Support	Mod (0.5)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.3)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential (bonus points)	Low (0.05)	High (0.15)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.4)
<b>Actual Points/Possible Points</b>	<b>6.25/10</b>	<b>7.25/10</b>	<b>7.50/10</b>	<b>7.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>	<b>7.90/10</b>
<b>% of Possible Score Achieved</b>	<b>62.5</b>	<b>72.5</b>	<b>75.0</b>	<b>79.0</b>	<b>79.0</b>	<b>79.0</b>	<b>79.0</b>	<b>79.0</b>
<b>Overall Category</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>0.30</b>	<b>0.30</b>	<b>0.30</b>	<b>0.30</b>	<b>0.30</b>	<b>0.30</b>	<b>0.30</b>	<b>0.30</b>
<b>Functional Units (acreage × actual points)</b>	<b>1.88</b>	<b>2.18</b>	<b>2.25</b>	<b>2.37</b>	<b>2.37</b>	<b>2.37</b>	<b>2.37</b>	<b>2.37</b>

(a) Berglund and McEldowney 2008 MDT MWAM.



The original on-site wetlands were impacted historically from grazing, leveling, channel straightening, and hydrological alterations, according to the 2005 baseline site evaluation. The wetland conservation easement area has been fenced and grazing has been excluded. David, Evans & Associates rated the historic waters of the US as Category III wetlands using the 1999 MDT Wetland Assessment Method.

Approximately 8.6 acres of wetlands have developed within the created cells that were located in areas identified as uplands in the baseline delineation. The cover of wetland vegetation within the footprint of the excavated cells developed rapidly from 2010 to 2017 as documented in the site photographs. The improvement in percent cover resulted in a corresponding increase in the function and value ratings. The Creation AA received 79.0 percent of the total possible points from 2013 through 2017, which is an increase from 69.0 percent in 2012. This AA achieved a total of 67.94 functional units in 2017. The increase of 17.22 functional units since 2014 can be primarily attributed to the increase in area attributed to the created AA area.

The area of the Restoration AA was 16.6 acres in 2017. The restoration/rehabilitation of the existing wet meadow received 81.8 percent of the total possible points and attained 149.4 functional units, which is 13.4 fewer than in 2014. The decrease in functional units occurred primarily to the correction of the acreage considered restoration in 2016. A portion of the acreage previously reported as restoration has been included in the 2017 Creation AA. The Restoration AA received excellent ratings for general wildlife habitat and production export/food chain support. The AA received high ratings for MTNHP species habitat, short and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, groundwater discharge/recharge, and recreation/education potential.

The 0.9-acre Enhancement AA received 54 percent of the total possible points in 2017. Many of the woody plants that had been installed in this area to enhance structural diversity did not survive. This AA attained 4.05 functional units in 2017. The wetland area that was considered as enhancement credit acres was corrected using GIS in 2017. Additionally, the score for general fish habitat was corrected to Not Applicable because of the lack of connection to any channel or fish habitat. The correction of the acreage and removal of general fish habitat resulted in a lower score than what was reported in 2014.

The Preservation AA for the existing riverine wetlands along the former channel of McGinnis Creek was defined in the USACE-approved mitigation plan as 0.30 acre in size. The wetland fringe along the former channel of McGinnis Creek currently encompasses 0.51 acre because of increased water levels once the former channel of McGinnis Creek was plugged in 2010. The additional 0.21 acre has been included in the Creation AA in this monitoring report to maintain congruence between the approved mitigation plan and original credit ratios. The Preservation AA evaluated only the 0.30 acre that abuts the plugged former channel of McGinnis Creek. This AA received 79.0 percent of the total points and 2.37 functional units in 2013 through 2017. The AA received excellent ratings in general wildlife habitat and high ratings for flood attenuation, short- and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, groundwater discharge/recharge, and recreation/education potential.

Table 2-28 provides a summary of the site's performance against approved success criteria. All wetlands delineated within the site in 2017 satisfied the criteria for wetland hydrology, hydrophytic vegetation, and hydric soils. The cover of wetland plants increased significantly from 60 percent in 2010 to nearly 100 percent in 2017. The success criteria that stipulates 70 percent cover of wetland plants was met site-wide in 2012 and has continued to increase into 2017. Vegetation cover within the disturbed areas of the upland buffer also exceeded 50 percent by 2012. The cover of state-listed noxious weed species in the site wetlands has remained less than 5 percent, which satisfies the performance standard. MDT continues to monitor and control noxious weeds within this mitigation site. The woody plants that were installed in 2011 exhibited high mortality immediately after installation with approximately 20 percent survival. The majority of woody plants that initially survived have continued to develop. The success criterion for 50 percent survival of the woody vegetation has not been met. An increase in natural recruitment of quaking aspen and speckled alder was observed in 2013 through 2017. Supplemental plantings of shrubs/trees should be considered at this site to meet this criterion. The McGinnis Creek restoration success criterion that pertains to well-vegetated banks with a majority of deep-rooting riparian and wetland plant species has been satisfied. The stream banks of McGinnis Creek were minimally disturbed during construction and are primarily vegetated with field meadow foxtail, common spikerush, Baltic rush, sedges and reed canary grass.

Five bird boxes were installed on site in fall 2012 and were used by tree swallows in 2017. The mitigation site design relied on excavating shallow depressions to intercept groundwater, an increase in hydrologic connectivity with McGinnis Creek and the adjacent floodplain, and the passive increase in the local water table. Consequently, water-control structures were not a part of the design. The majority of fencing that surrounds the perimeter of the site was intact in 2017. MDT spent 3 days in 2016 and another day in 2017 repairing damaged fence sections around the perimeter of the site.

**Table 2-28. Summary of Performance Standards and Success Criteria Compared to Existing Site Conditions (Page 1 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Wetland Characteristics	All of the restored, created, enhanced, and preserved wetlands within the project limits will meet the three parameter criteria for hydrology, vegetation, and soils as outlined in the 1987 Wetland Manual and 2010 Regional Supplement.	Y	Areas that were identified as wetland habitat within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Areas that were identified as wetland habitat within the mitigation site exhibit soil saturation for a minimum 12.5 percent of growing season.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	Hydric soil characteristics, including redoximorphic concentrations and depleted matrix, have developed throughout a majority of the constructed wetlands.
	Soil is sufficiently stable to prevent erosion.	Y	Disturbed soil is stable and does not exhibit signs of erosion.
	Soil is able to support plant cover.	Y	Plant cover across the disturbed soils is near 100 percent.
Hydrophytic Vegetation	Success is achieved where aerial cover of facultative or wetter species is greater than or equal to 70 percent.	Y	Areas that were identified as wetland habitat within the mitigation site support a prevalence of hydrophytic vegetation (OBL, FACW, and FAC) at greater than 70 percent cover.
	Montana state-listed noxious weeds do not exceed 5 percent cover.	Y	Montana state-listed noxious weed cover within wetland areas of the site is estimated at 2–3 percent.
Woody Plants	Plantings will be considered successful where they exceed 50 percent survival after 5 years.	N	The percentage of living woody vegetation (including natural recruitment of <i>Alnus</i> among the former channel) is well below the 50 percent target.
Open Water	Open-water area will be considered creditable under this plan.	Y	Open water appears to be perennial in several of the excavated cells. These areas exhibit vegetation cover generally greater than 20 percent.
McGinnis Creek Channel	Revegetation along the new McGinnis Creek channel corridor will be considered successful when banks are vegetated with a majority of deep-rooting riparian and wetland plant species.	Y	Vegetation along the constructed McGinnis Creek support robust vegetation with high root-stability indices and predominantly includes reed canary grass.

**Table 2-28. Summary of Performance Standards and Success Criteria Compared to Existing Site Conditions (Page 2 of 2)**

<b>Performance Standards</b>	<b>Success Criteria</b>	<b>Criteria Achieved Y/N</b>	<b>Discussion</b>
McGinnis Creek Channel	The intent of the stream restoration is to allow the stream to migrate naturally within the floodplain and to give it enough room to move and stabilize itself within the site.	Y	The stream has plenty of room to migrate within the boundary of the mitigation site.
Upland Buffer	Noxious weeds do not exceed 5 percent cover within upland buffer area.	Y	Noxious weed cover is less than 5 percent within the upland buffer.
	Any area disturbed within creditable buffer zone must have at least 50 percent aerial cover of nonweed species by end of monitoring period.	Y	Disturbed areas are well-vegetated (approximately 100 percent) by nonweed species.
Weed Control	Success will be based on annual monitoring of the site to determine weed species and degree of infestation within the site. Control measures, based on the monitoring results, will be implemented by MDT to minimize and/or eliminate the intrusion of state-listed noxious weed species within the site.	Y	State-listed noxious weed species across the site have been mapped yearly. Maps of weed infestations have been provided to MDT for evaluation, and control measures have been employed.
Fencing	Wildlife-friendly fencing will be installed along the easement boundaries.	Y	Wildlife-friendly fencing has been installed around the easement boundaries. A tree has fallen on the southeastern perimeter fence near PP1, and repairs are needed.

## 2.8 ROSTAD RANCH (BUTTE DISTRICT, YEAR 5)

The Rostad Ranch wetland mitigation project is located in the southwestern quarter of Section 12, Township 8 North, Range 11 East, Meagher County, Montana. The property is located approximately 0.6 mile northeast of Martinsdale, Montana. The wetland site was constructed to provide MDT with an estimated 39.70 acres of wetland mitigation credits on a private ranch that has historically been used for grazing cattle and hay production. Long-term protection of the wetland mitigation site is provided by a MDT Wetland Conservation Easement with the landowner and encompasses the entire 60-acre mitigation monitoring area. The site is demarcated by a newly installed fence along the boundaries of the MDT Conservation Easement.

The wetland mitigation site is located within Watershed #10 – Musselshell River Basin. Wetlands were developed at this location to provide compensatory mitigation for wetland impacts associated with future transportation projects in the Musselshell River Basin. The Rostad Ranch site was selected based on site evaluations and project feasibility assessments initiated by MDT in 2002.

The project objectives include the following:

- Provide 39.70 acres of wetland mitigation credits resulting from restoration, creation, rehabilitation, and preservation within the site
- Establish three types of wetland vegetation communities, including
  - Palustrine, emergent, wet meadow
  - Palustrine, scrub/shrub
  - Lacustrine, littoral – emergent zones around the open-water areas around the perimeter of wetlands

The Lennep 6 WSW (244954) weather station [Western Regional Climate Center, 2017a] is located near the site (approximately 11 miles southwest) and has a period of record that extends from August 1959 through August 2017. Based on data recorded from the Lennep Station from January through August, precipitation totals for this region were 12.50 inches (long-term average), 16.32 inches (2011), 9.42 inches (2012), 12.3 inches (2013), 14.27 inches (2014), 11.77 inches (2015), 10.81 inches (2016), and 8.16 inches (2017). The data that were collected after construction indicate below-average precipitation in 2012, 2015, 2016, and 2017; near-average precipitation in 2013; and above-average precipitation in 2014.

The hydrology for this wetland mitigation site is supplied from multiple sources, including a shallow seasonal groundwater table, groundwater that emerges from a natural spring located near the narrow-leaf willow (*Salix exigua*) stand in south portion of the site, direct precipitation, and surface runoff. Construction included excavating and grading to fill drainage ditches, distributing water across the mitigation site, creating open-water areas, and installing a diversion structure in the southern end of the site to direct irrigation water to the mitigation site. MDT has secured water rights to use surface water as a secondary source of hydrology to supplement the groundwater and ensure long-term viability of the wetland mitigation site.

During the 2017 field survey, approximately 75 percent of the wetland area was inundated, including one wetland depression impounded by a constructed dike in the north half of the site, and one

excavated depression located in the southern half of the site. MDT turned the irrigation water into the Rostad site on May 6; this water was shut off on July 5. In total, approximately 106 acre-feet of water was used at the site in 2017. Water depths ranged from 0.25 to 2.0 feet and averaged 0.5 foot. Vegetation around the perimeter of the open boundary increased since the 2014 monitoring event. Areas that were not inundated exhibited seasonal soil saturation to the ground surface.

Table 2-29 summarizes the estimated wetland credits based on the USACE-approved credit ratios and the wetland delineation completed in July 2017. Proposed mitigation credits from the 2007 Rostad Ranch Mitigation Plan included reestablishing 27.11 wetland acres, rehabilitating 2.63 wetland acres, creating 9.84 wetland acres, preserving 0.25 wetland acre, and maintaining 6.76 acres of upland buffer. The wetland acreages that were delineated in 2017 included 14.62 acres of reestablished wetlands, 0.81 acres of rehabilitated wetland, 10.74 acres of created wetland, and 0.25 acre of preservation wetland (community Type 3). The total mitigation credit estimated in 2017, including the upland buffer credit and the deduction for the 0.41-acre wetland impact that was incurred during mitigation construction, totaled 26.9 credit acres which is an increase of 11.71 acres over 2016.

The 1999 MDT MWAM [Berglund, 1999] was used to evaluate the three existing wetlands that were identified within the site in 2004. The 2008 MWAM [Berglund and McEldowney, 2008] has been used to evaluate the site from 2013 through 2017. All of the wetlands identified from 2013 through 2017 were evaluated as one AA. The results of the 2004 and 2013 through 2017 assessments are summarized in Table 2-30.

The 2004 assessment identified a total of 3.4 acres of Category III wetlands. The majority of the existing wetlands within the site before construction consisted of man-made drainage and irrigation ditches constructed to drain and disperse water throughout the site. The only remnants of the historic wetlands are a willow thicket and roadside drainage ditch. The preexisting wetlands averaged 34 percent of the possible score and attained 12.46 functional units.

Because of the complex boundaries of the proposed mitigation credits within the site, the Rostad Ranch site was assessed as one AA. The functional ratings displayed a decrease between 2013 and 2014, primarily because of the reevaluation of the water regime within the site from perennial to seasonal. The AA was rated as moderately disturbed in 2016 because of increased vegetation growth and time following disturbance from construction and/or grazing/cultivation. In 2017, wetland vegetation had successfully established on approximately 94 percent of the wetland areas, which resulted in high ratings for sediment/shoreline stabilization and sediment/nutrient/toxicant removal. The AA also received a high rating for MTNHP species habitat because of the documented primary habitat for the Great Basin calico-flower (*Downingia laeta*), which was observed on site from 2013 through 2015. Wetlands across the site remain Category III with high ratings for MTNHP species habitat, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, and production export/food chain support. The 11.52-acre increase in wetland acreage from 2016 to 2017 increased the total functional units from 85.7 to 159.85.

**Table 2-29. Summary of Wetland Credits at the Rostad Ranch Site From 2014 Through 2017**

Compensatory Mitigation Type	Wetland Type <sup>(a)</sup>	Approved Mitigation Ratio <sup>(b)</sup>	Anticipated Mitigation Area (acres)	Anticipated Mitigation Credit (acres)	2014 Delineated Mitigation Areas (acres)	2014 Estimated Mitigation Areas (acres)	2015 Delineated Mitigation Areas (acres)	2015 Estimated Mitigation Credit (acres)	2016 Delineated Mitigation Areas (acres)	2016 Estimated Mitigation Credit (acres)	2017 Delineated Mitigation Areas (acres)	2017 Estimated Mitigation Credit (acres)
Restoration (Reestablishment)	Palustrine emergent	1:1	27.11	27.11	9.91	9.91	9.91	9.91	9.96	9.96	14.62	14.62
Creation (Establishment)	Palustrine emergent	1:1	9.84	9.84	2.68	2.68	3.18	3.18	3.18	3.18	10.74	10.74
Restoration (Rehabilitation)	Palustrine emergent	1.5:1	2.63	1.75	1.56	1.04	1.56	1.04	1.56	1.04	0.81	0.54
Preservation	Palustrine, scrub/shrub	4:1	0.25	0.06	0.25	0.06	0.25	0.06	0.25	0.06	0.25	0.06
Upland Buffer	N/A	5:1	6.76 <sup>(c)</sup>	1.35	6.76	1.35	6.76	1.35	6.76	1.35	6.76	1.35
Permanent Wetland Impact	N/A	1:1	N/A	-0.41	N/A	-0.41	N/A	-0.41	N/A	-0.41	N/A	-0.41
<b>Totals</b>			<b>46.59</b>	<b>39.70</b>	<b>21.16</b>	<b>14.63</b>	<b>21.66</b>	<b>15.13</b>	<b>21.72</b>	<b>15.19</b>	<b>33.18</b>	<b>26.90</b>

(a) Cowardin et al. [1979].

(b) The mitigation credit ratios that were used are from the Montana Corps Regulatory Programs 2005 Wetland Credit Ratios [USACE, 2005].

(c) The anticipated upland buffer credit was used until wetland areas expand to full extent.

**Table 2-30. Functions and Values of the Rostad Ranch Site From 2004 and 2013 Through 2017**

<b>Function and Value Parameters From the Montana Wetland Assessment Method</b>	<b>2004<sup>(a)</sup> W-1-04</b>	<b>2004<sup>(a)</sup> W-2-04</b>	<b>2004<sup>(a)</sup> W-3-04</b>	<b>2013<sup>(b)</sup></b>	<b>2014<sup>(b)</sup></b>	<b>2015<sup>(b)</sup></b>	<b>2016<sup>(b)</sup></b>	<b>2017<sup>(b)</sup></b>
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0)	Low (0)	Low (0)	Low (0)
MTNHP Species Habitat	Low (0.2)	Low (0.2)	Low (0.2)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Mod (0.5)	Low (0.3)	Mod (0.5)	Mod (0.5)	Mod (0.5)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Short- and Long-Term Surface-Water Storage	Low (0.2)	Low (0.2)	Low (0.2)	High (0.8)	Mod (0.6)	Mod (0.6)	Mod (0.6)	High (0.9)
Sediment/Nutrient/Toxicant Removal	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.7)	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	Mod (0.6)	Mod (0.6)	N/A	N/A	Mod (0.6)	High (0.9)	High (0.9)	High (0.9)
Production Export/Food Chain Support	Mod (0.7)	Mod (0.7)	Low (0.3)	High (0.9)	Mod (0.6)	High (0.8)	High (0.8)	High (0.8)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	N/A	High (1.0)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Uniqueness	Low (0.2)	Low (0.2)	Low (0.2)	Mod (0.4)	Low (0.2)	Low (0.3)	Low (0.3)	Low (0.3)
Recreation/Education Potential (bonus points)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)
<b>Actual Points/Possible Points</b>	<b>3.9/10</b>	<b>3.9/10</b>	<b>1.9/8</b>	<b>5.25/8</b>	<b>4.65/9</b>	<b>5.75/9</b>	<b>5.75/9</b>	<b>6.05/9</b>
<b>% of Possible Score Achieved</b>	<b>39.0%</b>	<b>39.0%</b>	<b>24.0%</b>	<b>65.6%</b>	<b>51.7%</b>	<b>63.9%</b>	<b>63.9%</b>	<b>67%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>II</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries</b>	<b>1.2</b>	<b>1.8</b>	<b>0.4</b>	<b>13.74</b>	<b>14.40</b>	<b>14.90</b>	<b>14.96</b>	<b>26.42</b>
<b>Functional Units (acreage × actual points)</b>	<b>4.68</b>	<b>7.02</b>	<b>0.76</b>	<b>72.1</b>	<b>67.0</b>	<b>85.7</b>	<b>86.02</b>	<b>159.85</b>

(a) 1999 MWAM form [Berglund, 1999].

(b) 2008 MWAM form [Berglund and McEldowney, 2008].

Table 2-31 provides a summary of the approved performance standards and success criteria based on site conditions documented in 2017. All of the wetlands delineated at the Rostad Ranch site in 2017 satisfied the three criteria of wetland hydrology, hydrophytic vegetation, and hydric soils. Willow stakes that were planted within the site exhibited a 75 percent survival rate during the third year of planting, which is the same survival rate observed in 2016. Although the site was recently disturbed from construction efforts in 2012, vegetation is successfully establishing, with aerial coverage by desirable plants estimated at greater than 90 percent. The coverage of state-listed noxious weeds in the upland buffer was 5 percent in 2017. The cover of noxious weeds within the delineated wetlands was less than 5 percent. The extent of the open water surveyed in 2017 composed approximately 10 percent of the total wetland acreage, which is right at the cap of 10 percent stipulated in the USACE-approved performance criteria. The percentage of open water may continue to decrease as additional emergent wetlands develop on site. The entire 60-acre easement area has been fenced to exclude grazing.



**Table 2-31. Summary of Performance Standards and Success Criteria (Page 1 of 2)**

<b>Performance Standards</b>	<b>Success Criteria</b>	<b>Criteria Achieved Y/N</b>	<b>Discussion</b>
Wetland Characteristics	The three parameter criteria for hydrology, vegetation, and soils are met as outlined in the 1987 Wetland Manual and 2010 GP Regional Supplement.	Y	Wetland habitat areas within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Irrigation water was turned into the site on May 4 and turned off on July 6, 2017. All wetlands within the project area were likely saturated for greater than the minimum 12.5 percent of growing season.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	The recently constructed wetland complex exhibits weak hydric soil development in areas that had been originally identified as upland before construction. Preexisting hydric soil characteristics are present in several areas that had been identified as wetland before project construction.
	Soil is sufficiently stable to prevent erosion.	Y	Disturbed soil is stable and does not exhibit signs of erosion.
	Soil is able to support plant cover.	Y	Plant cover has continued to develop across disturbed soils.
Hydrophytic Vegetation	Combined absolute cover of facultative or wetter species is greater than or equal to 70 percent.	Y	Areas identified as wetland habitat within the mitigation site support a prevalence of hydrophytic vegetation (OBL, FACW, and FAC) with absolute cover exceeding 70 percent.
	Noxious weeds do not exceed 5 percent cover.	Y	Many noxious weed infestations have been mapped across this site, primarily outside of site wetlands. Estimated noxious weed cover within delineated wetlands is below 5 percent.
Woody Plants	Plantings exceed 50 percent survival after 5 years.	Y	Approximately 50 percent of the woody plantings observed were alive in 2017, which meets the 50 percent survival rate.
Herbaceous Plants	At the conclusion of the monitoring period, ocular coverage of desirable hydrophytic vegetation will be at least 80 percent.	Y	Created wetlands generally exhibited greater than 90 percent vegetation cover during the 2017 monitoring event and showed increased vegetation cover from 2013.
Open-Water Areas	Open water that is established within the designated wetland cells will be considered successful and creditable if open water does not exceed 10 percent of the total wetland acreage.	Y	Open water was mapped within 10 percent of the total wetland acreage in 2017. These areas are exhibiting emergent vegetation development and are anticipated to continue to develop aquatic macrophyte communities within the 5-year monitoring period.

**Table 2-31. Summary of Performance Standards and Success Criteria (Page 2 of 2)**

<b>Performance Standards</b>	<b>Success Criteria</b>	<b>Criteria Achieved Y/N</b>	<b>Discussion</b>
Upland Buffer	Success will be achieved when noxious weeds do not exceed 5 percent cover within the buffer areas on site.	Y	Many noxious weed infestations, including field bindweed, gypsy-flower, Canada thistle, spotted knapweed, common tansy, and hoary alyssum were mapped within the site in 2017. Although a variety of noxious weeds are present throughout the site, aerial coverage does not exceed 5 percent.
	Any area that was disturbed within creditable buffer zone must have at least 50 percent aerial cover of desirable upland plant species by the end of the monitoring period.	Y	Upland buffers that surround wetland areas within the site exhibited greater than 50 percent aerial cover of nonweed species in 2017.
Weed Control	Weed-control measures are implemented to minimize and/or eliminate infestations of state-listed noxious weed species within the site.	Y	State-listed noxious weed species across the site have been estimated at 5 percent absolute cover in 2017.
Fencing	Wildlife-friendly fencing is installed along the easement boundaries.	Y	Wildlife-friendly fencing has been installed around the easement boundaries and is in good condition.

Priority 2B noxious weeds that were identified within the Rostad Ranch site included hoary alyssum, spotted knapweed, Canadian thistle, gypsy-flower, field bindweed, and common tansy. A total of 33 infestation areas were mapped in 2016; these areas range in size from less than 0.1 acre to greater than 1 acre in size. The majority of the infestations, with cover classes that range from trace (< 1 percent) to moderate (6–25 percent), were located at the edge of the constructed wetlands in upland community Type 1. A weed contractor with MDT treated 2 acres (4.4 percent of the upland buffer) of the site in July 2016, with treatment concentrated in areas of infestation by the six noxious weed species observed on site. MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds identified at each location during the yearly monitoring and treatment of mapped weeds to contain and control identified populations.

The wildlife-friendly fence that was installed around the easement area was intact during the 2017 site visit. Seven bluebird boxes were installed around the site perimeter in 2012 and were in good condition in 2017. Swallows occupied two bird boxes during the 2017 site visit. The irrigation headgate structure was in good condition during the 2017 site visit. A small amount of fine sediment was beginning to accumulate in the stilling pool but did not appear to inhibit hydrology or the function of the structure. During future monitoring efforts, inspecting this structure and stilling pool is recommended to ensure proper functionality.

## 2.9 SCHRIEBER LAKE (MISSOULA DISTRICT, YEAR 3)

The Schrieber Lake Wetland Mitigation 2017 Monitoring Report presents the results of the third year of post-construction monitoring at the Schrieber Lake mitigation area. The site was acquired by MDT in 2010 to provide compensatory mitigation for both stream and wetland impacts associated with the proposed Swamp Creek – East projects along the US Highway 2 corridor and to serve as a mitigation bank for future transportation projects within Watershed # 1 – Kootenai River basin.

The MDT Schrieber Lake mitigation project is located adjacent to the US Highway 2 corridor in Sections 12 and 13, of Township 27 North, Range 30 West, Lincoln County. The 104.6-acre site lies within the boundaries of Watershed #1 – Kootenai River Basin. This site is situated directly downstream and adjacent to the 141-acre MDT-owned Schrieber Meadows aquatic mitigation project. The property is bisected by Coyote Creek, which drains into Schrieber Lake, which eventually drains into the Fisher River. Schrieber Lake is situated within a narrow valley corridor bordered on the west and north sides by the Kootenai National Forest. The US Highway 2 corridor bounds the area to the east.

Before the construction of the Schrieber Lake Mitigation Project, the area consisted of hay grounds and historic wetlands that had been filled, graded, leveled, and drained. The stream channel had been channelized to promote and maximize hay production and grazing opportunities for livestock, as well as to flood irrigate the adjacent hay pastures. Historically, the project site was likely a large floodplain and beaver pond complex of mixed riparian scrub/shrub and emergent wetlands associated with both Coyote and Schrieber Creeks.

The goals of the mitigation project include preserving, restoring, and creating wetland and riparian habitats. Specifically, MDT plans to restore the hydrology to approximately 19 acres of drained wetlands by excavating and creating depression wetland cells; protecting the existing 10.2 acres of fen-carr shrub land wetland vegetation community; restoring previously developed agricultural areas into native wetland and upland plant communities by seeding and plantings; relocating and reconstructing approximately 3,500 linear feet of Schrieber Creek from the adjacent Schrieber Meadows site to its historic channel and outfall into Schrieber Lake; and relocating and restoring approximately 1,500 linear feet of channelized Coyote Creek to its historic channel and outfall into Schrieber Lake.

MDT anticipates developing 13.4 wetland credit acres from the Schrieber Lake wetland and stream restoration project. The plan included creation, restoration (rehabilitation and enhancement), and upland buffer credits. The entire Schrieber Lake mitigation project encompassed creating additional depression wetland cells and buffer areas within upland and degraded wetlands, enhancing scrub/shrub palustrine wetlands, and reconstructing the Coyote and Schrieber Creek channels. The crediting objectives of the full Schrieber Lake stream and wetland restoration project include the following:

### **Wetland Mitigation Objectives**

- **Creation:** Create 3.06 wetland credit acres by excavating shallow seasonal depressional wetland cells within the upland portions along the edges of the site. These areas will be seeded with a native wetland plant seed mix, and volunteer seeds within the soil bank are anticipated to colonize within these sites.
- **Restoration (Reestablishment):** Provide approximately 1.69 wetland credit acres through the excavation of shallow depressions in the portions of the lower hay meadow. These shallow depressions were constructed to diversify the vegetation community, by removing nonnative pasture grass sod within the site. These depressions will be flat and 1–2 feet deep to promote revegetation and establishment of *Carex* species.
- **Enhancement:** Provide 1.51 wetland credit acres will be derived from the 4.46 acres of area that will be enhanced within the site. Enhancement will be a primary tool for much of the mitigation efforts within the lower hay meadow that will provide for the natural succession of the fen-carr wetland community to expand beyond its current limitations because of haying operations. It is expected that the succession of woody species will continue along the northern edge of the fen-carr shrubland out into the former hay meadow once haying has ceased. Further enhancements within these areas will include seeding and woody plantings.
- **Preservation:** Provide approximately 6.4 wetland preservation credit acres. Approximately 25.6 acres of the property will be preserved, primarily because of the unique fen-carr areas that are present within the site.
- **Upland Buffers:** Approximately 0.76 upland buffer credits are being requested for those created wetland cells located at the northern end and within the interior of the property. These upland buffers are separated from the proposed riparian buffers for the new stream channels. The upland buffer areas will be reseeded and planted with shrubs/trees in an effort to diversity the vegetation communities adjacent to these created wetlands.
- **Open Water:** The open-water area of Schrieber Lake will be protected and maintained as open water and is not considered as part of the preservation credit calculation.

### **Stream Mitigation Objectives**

For the purposes of obtaining stream mitigation credits for the proposed Schrieber Lake mitigation project, the proposed stream restoration areas concerning Schrieber and Coyote Creeks have been divided into seven distinct reaches: Coyote Creek two reaches, Schrieber four reaches and the combined Coyote Creek/Schrieber Creek channel as the final reach.

- Restore approximately 4,505.9 linear feet of stream channel of both Coyote and Schrieber Creeks
- Develop approximately 36,741.85 stream mitigation credits with the restoration of Coyote and Schrieber Creeks for use within Watershed #1 – Kootenai River Basin.

Climate data from the Libby 32 SSE, Montana (245020), weather station recorded an average total annual precipitation rate of 24.44 inches from 1949 to 2016 [Western Regional Climate Center, 2017b]. Annual precipitation in 2015 (21.26 inches) and 2016 (21.73 inches) was approximately 3 inches below the long-term average. Precipitation from January through August in 2015 (11.14 inches),

2016 (10.56 inches), and 2017 (8.47 inches) were 4–7 inches below the long-term average for that time of year (14.94 inches). In general, the region that surrounds the project area received below-average precipitation over the past 3 years of monitoring. Based on field observations of hydrology within the site over the first 3 years of monitoring, water levels within the excavated basins appeared to be largely influenced by groundwater and stream discharge with moderate influence from direct precipitation.

During the July 2017 investigation, the average depth of surface water across the site was estimated at 2 feet with a range of depths from 1 to 3 feet. Approximately 80 percent of the AA was inundated. The surface-water depth at the emergent vegetation and open-water boundary was estimated at 1.1 feet. Direct precipitation also contributes to wetland hydrology, but the high seasonal groundwater table provides the majority of water that drives wetland hydrology within this site. Other site-wide indicators of wetland hydrology included saturation and inundation that is visible on aerial photographs and a seasonal high groundwater table.

### **Wetland Mitigation Credit**

A total of approximately 13.4 wetland credit acres is expected to be generated from the full build-out of the Schrieber Lake project. Proposed mitigation credits from the 2014 Schrieber Lake Mitigation Plan included creating 3.06 wetland acres, reestablishing 2.53 wetland acres, enhancing 4.53 acres of the fen-carr shrubland expansion, preserving 25.6 acres of existing fen-carr Carex areas, and creating a 50-foot upland buffer (3.81 acres).

Table 2-32 summarizes the estimated wetland credits based on the pending USACE-approved credit ratios and the wetland delineation completed in July 2017. The 2017 wetland delineation indicates that when Schrieber Lake, riparian buffer, and other uncreditable areas are considered, 37.65 acres of wetland habitat exist within the site. The wetland acreages delineated in 2016 included 4.8 acres of created wetland, 2.42 acres of reestablished wetlands, 4.77 acres of enhanced wetlands, 25.66 acres of preserved wetlands, and 3.81 acres of upland buffer. Please note that the 2015 and 2016 credit calculations in Table 2-32 included an upland buffer around all wetlands on the property rather than just the newly established wetlands toward the center of the site. Because MDT only proposes to obtain upland buffer credits on 3.81 acres of upland, these numbers have been adjusted. The 2017 estimated credit acres for this site have exceeded the proposed credit acres. A total of 15.17 credit acres have developed at this site after mitigation construction.

**Table 2-32. Summary of Wetland Credits at the Schrieber Lake Site 2015–2017**

Mitigation Type	Total Proposed Acreage	Ratio <sup>(a)</sup>	Proposed Credit Acres	2015 Delineated Acreage	2015 Credit Acres	2016 Delineated Acreage	2016 Credit Acres	2017 Delineated Acreage	2017 Credit Acres
Creation	3.06	1:1	3.06	4.80	4.80	4.80	4.80	4.80	4.80
Restoration (Reestablishment)	2.53	1.5:1	1.69	2.42	1.62	2.42	1.62	2.42	1.62
Enhancement areas – carr shrubland expansion	4.53	3:1	1.51	4.77	1.59	4.77	1.59	4.77	1.59
Preservation – existing fen-carr <i>Carex</i> areas	25.60	4:1	6.40	25.66	6.42	25.66	6.42	25.66	6.42
Upland buffer (50 foot) <sup>(b)</sup>	3.81	5:1	0.76	8.42	1.68	8.42	1.68	3.81	0.76
Permanent project impacts	0.02	None	-0.02	-0.02	-0.02	-0.02	-0.02	-0.02	-0.02
<b>Total Mitigation Acreage</b>	<b>39.55</b>		<b>13.40</b>	<b>46.05</b>	<b>16.09</b>	<b>46.05</b>	<b>16.09</b>	<b>41.44</b>	<b>15.17</b>

(a) The ratios used are from Column A of the Montana Regulatory Program Wetland Compensatory Mitigation Ratios, April 2005. Riparian buffer areas were used to calculate stream and riparian credits. Wetland acreages within riparian buffer were subtracted from wetland credit total; the riparian buffer does not include upland buffer acreage.

(b) A standard 50-foot upland buffer was assumed for the perimeter of the delineated wetland. No credits are being requested for the existing Schrieber Lake.

### **Stream Mitigation Credit**

The goal of the stream mitigation component of the Schrieber Lake project includes restoring approximately 2,130 linear feet of Schrieber Creek, 1,397 feet of Coyote Creek, and 978 feet of Schrieber Creek below the Schrieber/Coyote Creek confluence, which results in an overall increase of 3,108 linear feet of stream length. When combined with establishing and protecting a riparian buffer of varying width on both sides of the restored channels, the project is expected to generate a total of 36,741.87 stream and riparian credits (Table 2-33). The stream mitigation project has been separated into seven distinct reaches, including the following:

1. **Coyote Creek, Reach 1A**, which involves reconstructing a new channel through the lower hay meadow between the MDT-owned Schrieber Meadows property line to its confluence with an existing, relic segment of Coyote Creek (974.5 feet)
2. **Coyote Creek, Reach 1B**, which consists of a relic segment of Coyote Creek that has been reactivated because of this project (423.0 feet)
3. **Schrieber Creek, Reach 1**, which consists of a newly constructed channel configuration that extends from the existing channel downstream to Reach 2A (531.6 feet)
4. **Schrieber Creek, Reach 2A**, which consists of a newly constructed channel configuration that extends from the downstream end of Reach 1 to the upstream end of Reach 2B (544.5 feet)
5. **Schrieber Creek, Reach 2B**, which consists of a newly constructed channel configuration that transitions between Reach 2A and Reach 3 (121.4 feet)
6. **Schrieber Creek, Reach 3**, which consists of a newly constructed channel configuration that extends from Reach 2B to the confluence with Coyote Creek (932.9 feet)

7. **Schrieber Creek, Reach 7**, which consists of a relic channel that extends from the confluence of Schrieber and Coyote Creeks to Schrieber Lake (978 feet).

**Table 2-33. Anticipated Riparian and Stream Credits Generated From the Schrieber Lake Site**

Channel Segment	Reach	Side	Predicted Credits
Coyote Creek	1A	A	4,141.63
		B	4,141.63
	1B	A	1,586.25
		B	1,692.00
Schrieber	1	A	2,392.20
		B	2,392.20
	2A	A	2,722.50
		B	2,722.50
	2B	A	576.65
		B	576.65
	3	A	3,964.83
		B	3,964.83
	7	A	2,934.00
		B	2,934.00
<b>Total</b>			<b>36,741.87</b>

The 2008 MDT MWAM was used to evaluate the site in 2015 (Table 2-34). The functional assessment completed in 2017 incorporated the created, restored and preserved wetlands into one AA. The MWAM AA included all of the delineated wetlands, including the creditable wetlands (37.12 acres), the wetlands within the riparian buffers of Schrieber and Coyote creeks (3.9 acres), the open water within Schrieber Lake (8.26 acres), those portions of Schrieber and Coyote creeks that flow through the wetland areas (0.65 acre), and the wetlands on US Forest Service (USFS) lands (1.25 acres). The wetlands in the AA received a Category I rating with 87 percent of the total possible points in 2017. The 51.7-acre AA rated as a Category I wetland, scored excellent for general wildlife habitat and production export/food chain support, and scored high for listed/proposed T&E species habitat, short- and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, groundwater/discharge/recharge, and uniqueness.

**Table 2-34. Functions and Values of the Schrieber Lake Site From 2015 to 2017**

<b>Function and Value Parameters From the 2008 MDT MWAM<sup>(a)</sup></b>	<b>2015</b>	<b>2016</b>	<b>2017</b>
Listed/Proposed T&E Species Habitat	High (0.8)	High (0.8)	High (0.8)
Montana Natural Heritage Program (MTNHP) Species Habitat	Mod (0.6)	Mod (0.6)	Mod (0.6)
General Wildlife Habitat	High (1.0)	High (1.0)	High (1.0)
General Fish/Aquatic Habitat	Mod (0.7)	Mod (0.5)	Mod (0.5)
Flood Attenuation	Mod (0.6)	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	High (1.0)	High (1.0)	High (1.0)
Sediment/Nutrient/Toxicant Removal	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	High (1.0)	High (1.0)	High (1.0)
Production Export/ Food Chain Support	High (1.0)	High (1.0)	High (1.0)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)
Uniqueness	High (0.9)	High (0.9)	High (0.9)
Recreation/Education Potential	Mod (0.1)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>9.7/11</b>	<b>9.6/11</b>	<b>9.6/11</b>
<b>% of Possible Score Achieved</b>	<b>88.2</b>	<b>87</b>	<b>87</b>
<b>Overall Category</b>	<b>I</b>	<b>I</b>	<b>I</b>
<b>Acreage of Assessed Aquatic Habitats within Easement (acres)</b>	<b>51.7</b>	<b>51.7</b>	<b>51.7</b>
<b>Functional Units (acreage × actual points)</b>	<b>501.49</b>	<b>496.32</b>	<b>496.32</b>

(a) Berglund and McEldowney [2008].

The current site conditions documented in 2017 are compared to the approved performance standards and success criteria in Table 2-35. The wetlands that were delineated in 2017 met the performance standards approved for this site, which included meeting the three parameter criteria for hydrology, vegetation, and soils. Hydrophytic vegetation success has been achieved based on the absolute cover of facultative or wetter species being at 70 percent or more. The open-water area of Schrieber Lake was given no credit based on the stated goal of the project to maintain already existing open water in Schrieber Lake. Weed cover site-wide and within the upland buffers is estimated at less than 5 percent, which meets the success criteria. Isolated weed infestations were mapped throughout the site and are controlled by MDT as mandated by the performance standards. The upland buffer success criteria have been achieved; these areas have at least 50 percent aerial cover of nonweed species.

The 2015 monitoring report for the Schrieber Lake site provided a first-year, baseline assessment of the site's condition after the project's completion. Data collected during the 2017 monitoring revealed continued development of vegetation cover along stream reaches. The increase in vegetation cover included an increase in noxious weed cover. Reaches 1, 2A, and 2B of Schrieber Creek have yet to meet performance criteria established for (1) establishing bank-stabilizing vegetation communities and (2) percent cover of noxious weeds within the riparian corridor. Reaches 3 and 7 of Schrieber Creek



**Table 2-35. Summary of Performance Standards and Success Criteria at the Schrieber Lake Site in 2017 (Page 1 of 4)**

Performance Standards	Success Criteria	Criteria Achieved Y/N		Discussion
		SC <sup>(a)</sup>	CC <sup>(b)</sup>	
Wetland Characteristics	The three parameter criteria are met for hydrology, vegetation, and soils as outlined in the 1987 Wetland Manual and 2010 Regional Supplement.	Y	Y	Areas that were identified as wetland habitat within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Y	Areas that were identified as wetland habitat within the mitigation site exhibit soil saturation for a minimum 12.5 percent of growing season.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	Y	Hydric soil characteristics have developed throughout a majority of the constructed wetlands.
	Soil is sufficiently stable to prevent erosion.	Y	Y	Disturbed soil is stable and does not exhibit signs of erosion.
	Soil is able to support plant cover.	Y	Y	Plant cover is well established across disturbed soils.
Hydrophytic Vegetation	Combined absolute cover of facultative or wetter species is 70 percent or greater.	Y	Y	Areas that were identified as wetland habitat within the mitigation site support a prevalence of hydrophytic vegetation (OBL, FACW, and FAC).
	State-listed noxious weeds do not exceed 5 percent absolute cover.	Y	Y	State-listed noxious weeds are estimated well below 5 percent absolute cover within wetland areas.
	Woody plants exceed 50 percent survival after 5 years.	N	N	Woody plant survival is very low.
Open Water	The project is intended to provide open water during the spring and early summer within excavated depressions. Open water with emergent, submerged, and/or floating vegetation will, therefore, be considered successful and creditable.	Y	Y	Excavated depressions within the upper reach of the site experience seasonal drawdown, and rooted hydrophytic vegetation development has been observed. The lower depressions appear to support perennial inundation with an established aquatic macrophyte community.

**Table 2-35. Summary of Performance Standards and Success Criteria at the Schrieber Lake Site in 2017 (Page 2 of 4)**

Performance Standards	Success Criteria	Criteria Achieved Y/N		Discussion
		SC <sup>(a)</sup>	CC <sup>(b)</sup>	
Channel Restoration Success	Revegetation along the new Coyote and Schrieber Creek channel corridors will be considered successful when banks are vegetated with a majority of deep-rooting riparian and wetland herbaceous and woody plant species with a root stability indexes greater than 6.	N	Y	Three of the five reaches of Schrieber Creek are ephemeral in nature and have yet to develop vegetation along the banks. As a result, these reaches (SC1, SC2A, and SC2B) do not currently meet the performance criteria. The downstream reaches of Schrieber Creek (Reaches SC3 and SC7) and both reaches of Coyote Creek (CC1A and CC1B) are dominated by reed canary grass, which has a root stability index of 9.
	New stream channels will be allowed to naturally migrate within the established floodplain/riparian areas and to give it enough room to move and stabilize itself within the site.	Y	Y	No lateral migration has been documented along either Schrieber or Coyote Creek to date.
Bank Restoration Success	Rates of success will be determined by the following rates: i.) Rate of less than 0.5 ft of erosion annually = Functioning ii.) Rate of less than 1.0 ft/year = Functioning iii.) Rate of less than 1.5 ft/year = Functioning at Risk iv.) Rate of less than 2.5 ft/year = Functioning at Risk v.) Rate of greater than 2.5 ft/year = Functioning at Risk or Not Functioning vi.) Rate of less than 3 ft/year = Not Functioning.	Y	Y	Transect data derived from bank pin locations during the 2017 monitoring have documented no lateral channel migration since 2015.

**Table 2-35. Summary of Performance Standards and Success Criteria at the Schrieber Lake Site in 2017 (Page 3 of 4)**

Performance Standards	Success Criteria	Criteria Achieved Y/N		Discussion
		SC <sup>(a)</sup>	CC <sup>(b)</sup>	
Bank Restoration Success	Ratings for the stream bank will be based on the proper functioning condition rating that determines if the area supports a healthy, stable bank area adjacent to the stream: i.) Functioning – The stream bank supports a healthy and stable bank area adjacent to the river. ii.) Functioning at Risk – one or more functions of the stream bank are adjusting to changes in the design within the reach area, and more monitoring is needed. ii.) Not Functioning – Measurements of the functions indicate that the site is not achieving functional goals and is not supporting a healthy, stable bank reach.	N/A	N/A	This data will be collected during the third and fifth monitoring years.
Riparian Buffer Success	Creditable buffer areas must have at least 50 percent aerial cover of nonnoxious weed species by the end of the monitoring period.	Y	Y	All riparian vegetation transects exhibited 50 percent or greater areal cover of nonnoxious weed species along both Schrieber and Coyote Creek.
	Combined aerial cover of riparian and stream bank vegetation communities is 70 percent or greater.	N	Y	Combined areal cover of riparian and stream bank vegetation along Schrieber Creek is 56 percent; however, two cross sections indicated a total weighted percent cover below 70 percent. Combined areal cover of riparian and stream bank vegetation along Coyote Creek is 100 percent.
	Noxious weeds do not exceed 5 percent cover within the riparian buffer areas.	N	Y	Noxious weed cover along Schrieber Creek is estimated at 8 percent. Noxious weed cover along Coyote Creek is 2 percent.
	Planted trees and shrubs will be considered successful where they exhibit 50 percent survival after 5 years.	N	N	Planted trees and shrubs along Schrieber Creek exhibit less than 50 percent survival to date. Planted trees and shrubs along Coyote Creek exhibit a 43 percent survival rate to date.

**Table 2-35. Summary of Performance Standards and Success Criteria at the Schrieber Lake Site in 2017 (Page 4 of 4)**

Performance Standards	Success Criteria	Criteria Achieved Y/N		Discussion
		SC <sup>(a)</sup>	CC <sup>(b)</sup>	
Upland Buffer	Noxious weeds do not exceed 5 percent cover within upland buffer area.	Y	Y	Noxious weed cover is less than 5 percent within the upland buffer.
	Any area that was disturbed within creditable buffer zone must have at least 50 percent aerial cover of nonweed species by end of monitoring period.	Y	Y	Disturbed areas have established greater than 50 percent cover by nonweed species.
Weed Control	Weed control will be based on annual site monitoring to determine weed species and degree of infestation within the site. Control measures based on the monitoring results will be implemented by MDT to minimize and/or eliminate the intrusion of state-listed noxious weed species within the site.	Y	Y	State-listed noxious weed species across the site have been monitored and mapped during each post-construction monitoring event. MDT administers an ongoing weed-control program.

(a) SC = Schrieber Creek

(b) CC = Coyote Creek.

and Reaches 1A and 1B of Coyote Creek currently meet all of the success criteria and are expected to generate the predicted credits outlined in the monitoring plan. Future site monitoring will determine whether vegetation establishment within Reaches 1, 2A, and 2B of Schrieber Creek results in achieving the success criteria and generating all of the anticipated credits.

Two nest boxes were installed at the site, in good repair, and occupied. Noxious weed management will be an ongoing issue at this site. MDT completed noxious weed spraying at the Schrieber Lake site on August 2, 2017. No other maintenance needs were identified. Priority 2B noxious weeds identified within the Schrieber Lake mitigation site included spotted knapweed (*Centaurea stoebe*), Canada thistle (*Cirsium arvense*), Gypsy-flower (*Cynoglossum officinale*), St. Johnswort (*Hypericum perforatum*), ox-eye daisy (*Leucanthemum vulgare*), dalmatian toadflax (*Linaria dalmatica*), whitetop (*Lepidium draba*), and yellow toadflax (*Linaria vulgaris*).

## 2.10 SCHRIEBER MEADOWS (MISSOULA DISTRICT, YEAR 7)

The MDT Schrieber Meadows mitigation project is located adjacent to the US Highway 2 corridor in Sections 11, 12, and 13, of Township 27 North, Range 30 West, MPM, Lincoln County. The 147-acre site lies within the boundaries of Watershed #1 – Kootenai River Basin. Schrieber Meadows is situated within a narrow valley corridor bordered on the western and northern edges by the Kootenai National Forest and the US Highway 2 corridor and on the south by private property. The majority of the site is situated on an MDT-owned parcel of land that consisted of hay fields, pastures, and clear-cut forest slopes. The remainder of the site is within a 16-acre easement area in the Kootenai National Forest adjacent to the MDT parcel. The property is bisected by Coyote Creek, which eventually drains into Schrieber Lake and the Fisher River. Based on the nature of the peat and lacustrine soils identified within the project area, the MDT Geotechnical Section indicated that constructing a new stream channel and wetlands within Schrieber Meadows could potentially affect stability of US Highway 2. In 2007, a pilot wetland project to excavate several shallow depressional wetland cells within these peat and lacustrine soils was completed in an effort to determine constructability within these soil types. Three shallow wetland cells were created in 2007 and initially monitored in 2010.

Based on the results of the pilot project, this wetland and stream restoration project was scaled back from the original design. A 300-foot buffer was established by the MDT Geotechnical Section from the edge of roadway, which limited potential areas of development for the new stream channel and depressional wetland areas within the project area. The existing Coyote and Schrieber Creek channels were relocated to the west away from the highway corridor to allow for natural channel migration and overbank flooding. The elevation of the restored channels was raised to promote access to the floodplain and increase the localized water table throughout this meadow. A series of wetland cells (depressions) were excavated throughout the floodplain to increase flood storage and provide for a diversity of wetland habitat. The existing drainage ditch along the eastern boundary of the site was plugged to prevent excessive drainage and create pockets of surface water.

Two components to this mitigation site are wetland and stream habitat development and improvement. The objectives of the Schrieber Meadows wetland and stream restoration project are listed below:

### **Wetland Mitigation**

- Create an additional 6.53 wetland credit acres of new seasonally inundated emergent depressional wetlands within portions of the existing upland hay fields on both the USFS and MDT properties with a variety of herbaceous wetland communities
- Provide approximately 1.56 wetland credit acres through the restoration (rehabilitate) of 2.36 acres of degraded wetlands (at 1.5:1 ratio) that are dominated by tame pasture grasses such as meadow foxtail (*Alopecurus* sp.), reed canary grass (*Phalaris arundinacea*), timothy (*Phleum pratense*), and other hay species by permanently restoring hydrology, land-surface manipulation (excavating shallow depressions), and revegetation with wetland plant seed
- Provide approximately 4.41 wetland credit acres by enhancing 13.22 acres of existing wetlands (at 3:1 ratio) located between the proposed stream mitigation portion of the project area and the US Highway 2 corridor
- Provide approximately 1.70 wetland credit acres by developing upland buffers that total 8.50 acres (at 5:1 ratio) around the created, restored, and enhanced wetland areas and stream riparian corridors
- Establish an overall total of 17.84 acres of wetland mitigation credits to mitigate wetland impacts associated with MDT projects within Watershed #1 – Kootenai River Basin
- Impact approximately 0.08 acre of wetlands by installing ditch plugs along the channelized perennial reaches of Coyote and Schrieber Creeks to divert the flows into the new stream channel.

### **Stream Mitigation**

- Restore approximately 7,756 linear feet of new stream channel to both Coyote and Schrieber Creeks resulting in an overall increase of 3,327 linear feet of stream length to both creek corridors by restoring sinuosity, floodplains, and natural stream migration within the project site
- Develop approximately 35,551 stream mitigation credits by restoring Coyote and Schrieber Creeks for use within Watershed #1 – Kootenai River Basin

### **Wetland Mitigation Credit**

The pilot project constructed in 2007 generated approximately 3.72 mitigation credit acres including 2.38 credit acres of wetland creation, 0.75 credit acre of restoration (rehabilitation) of existing wetlands (1.12 acres restored), and 0.59 credit acre of upland (2.96 acres maintained) buffer around the wetlands. The pilot project was engulfed by the larger project constructed by MDT in 2011. Table 2-36 provides the credits generated at the Schrieber Meadows site for the approximate 57-acre full-scale project with no differentiation between the pilot project and full build-out of the Schrieber Meadows project.

Approximately 17.24 wetland credit acres was anticipated to be generated from the full build-out of the Schrieber Meadows project, including the approved credits from the 2007 pilot project. The proposed wetland credits shown on Table 2-36 are described below. Approximately 8.91 acres of wetlands was expected to be created by excavating Cells 1 to 11. The 2013 through 2017 delineated acreages

**Table 2-36. Summary of Wetland Mitigation Credits at the Schrieber Meadows Mitigation Site From 2013 Through 2017**

Mitigation Type	Total Proposed Acreage	Ratio	Proposed Credit Acres	2013 Delineated Acreage	2013 Credit Acres	2014 Delineated Acreage	2014 Credit Acres	2015 Delineated Acreage	2015 Credit Acres	2016 Delineated Acreage	2016 Credit Acres	2017 Delineated Acreage	2017 Credit Acres
Creation – USFS/MDT Property	8.91	1:1	8.91	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43	22.43
Restoration on USFS/MDT Property	3.46	1.5:1	2.31	3.46	2.31	3.46	2.31	3.46	2.31	3.46	2.31	3.46	2.31
Enhancement of Wetlands Inside Geotechnical Limits Adjacent to US Highway 2 (MDT/USFS)	13.22	3:1	4.41	13.22	4.41	13.22	4.41	13.22	4.41	13.22	4.41	13.22	4.41
Riparian Buffer <sup>(a)</sup>		–		8.30	(b)	8.30	(b)	8.30	(b)	8.30	(b)	8.30	(b)
Upland Buffer	8.50	5:1	1.70	12.39 <sup>(c)</sup>	2.48	12.39 <sup>(c)</sup>	2.48	12.39 <sup>(c)</sup>	2.48	12.39 <sup>(c)</sup>	2.48	12.39 <sup>(c)</sup>	2.48
Project Impacts	–0.08	None	–0.08	–0.08	–0.08	–0.08	–0.08	–0.08	–0.08	–0.08	–0.08	–0.08	–0.08
<b>Total Mitigation Acreage</b>	<b>34.01</b>		<b>17.25</b>	<b>59.72</b>	<b>31.54</b>	<b>59.72</b>	<b>31.54</b>	<b>59.72</b>	<b>31.54</b>	<b>59.72</b>	<b>31.54</b>	<b>59.72</b>	<b>31.54</b>

(a) Riparian buffer areas were used to calculate stream and riparian credits.

(b) Wetland acreages within riparian buffer were subtracted from wetland credit total; riparian buffer does not include upland buffer acreage.

(c) Acreage includes 50-foot buffer around wetlands within MDT and USFS property and outside of the riparian buffer.

indicated that 22.43 acres of wetland habitat have been created within this mitigation site. Water levels have substantially increased because of the newly constructed channel of Coyote Creek and abundant surface and groundwater that flows through the valley. The high groundwater elevations found on the site are caused by a combination of restoration efforts to plug existing drain ditches and channels as well as the subsidence of the histosol soil elevations over time. All wetlands within the 25-foot riparian buffer (8.30 acres) that were used to calculate stream mitigation credits were subtracted from total wetland habitat to avoid double calculation of total mitigation credits at this site.

A total of 2.31 acres of wetland credit was to be generated from restoring 3.46 acres of wetlands located within a small portion of the USFS property and a portion of MDT property in wetland Cells 4, 5, 8, 9, 10, and 11. A total of 4.41 acres of wetland credit has been generated by hydrologically enhancing 13.22 acres of existing wetlands that are located between the stream mitigation portion of the project area and the US Highway 2 corridor.

Approximately 2.48 acres of mitigation credit have been generated by preserving 50-foot upland buffers around the perimeter of the wetland boundary. Upland buffer credit was given to areas located on MDT and USFS property and outside of the 25-foot riparian buffer. Developing this mitigation site resulted in impacts to 0.08 acre of wetland by installing the ditch plugs. The 0.08 acre was debited from the estimated credit acreages. Overall, the proposed credit acres of 17.24 have been surpassed by developing 31.54 acres, which created a surplus of 14.30 credit acres.

The 2017 estimated credit acres for this site have exceeded the proposed credit acres because of the rise in the water table after the former Coyote Creek channel was abandoned and also because of the subsequent increase in site-wide wetland hydrology. A total of 31.54 credit acres have developed at this site after mitigation construction.

### **Stream Mitigation Credit**

The goal of the stream mitigation component of the Schrieber Meadows project was to restore approximately 7,756 linear feet of new stream channel in both Coyote and Schrieber Creeks, which would result in an overall increase of 3,327 linear feet of stream length with the development of approximately 35,551 stream mitigation credits. The stream mitigation project has been separated into five distinct segments:

- **Upper Coyote Creek** is the segment from the edge of the forested areas on and through the USFS parcel onto the MDT-owned parcel. This segment is considered a seasonally intermittent stream and does not become perennial again until it reaches the spring area on the MDT property.
- **Coyote Creek Spring Area** is the area between the USFS restored segment of stream and the access road into the MDT site. A large spring emanates from this location; MDT did not manipulate this area except to plant the adjacent riparian zones with woody shrubs and trees.
- **Middle Coyote Creek** begins at the culverts under the access road and extends to its connection with Schrieber Creek. The stream is perennial because of groundwater flows that emanate from the spring area.



- **Perennial Spring Channel Ditch** was originally a drainage ditch constructed to relocate flows from a natural spring that emanates from the hillside in the south-central portion of the site. At the suggestion of the MFWP fisheries biologist for this region, the ditch was reconstructed into a natural channel and connected to Coyote Creek to contribute perennial flow to Coyote Creek.
- **Merged Coyote/Schrieber Creeks** is the segment of stream at the southeast portion of the MDT property where Schrieber Creek merges with Coyote Creek to form Schrieber Creek and then continues beyond the property boundary. The stream flow is perennial through this segment.

The completed restoration of sinuosity and stream length to both Coyote Creek and Schrieber Creek was intended to create a new channel length of approximately 7,756 linear feet, which is an overall increase of 3,327 linear feet from the previously channelized length of 4,429 linear feet. As part of the Montana Stream Mitigation Procedure [USACE, 2005], calculating stream mitigation credits includes summing both riparian (Table 2-37) and stream credits (Table 2-38).

**Table 2-37. Determination of Riparian Mitigation Credits for Schrieber Meadows**

Factors	Upper Coyote Creek (USFS)	Coyote Creek Spring Area	Middle Coyote Creek (MDT)	Perennial Spring Channel	Merged Coyote/Schrieber Creeks
Net Improvement – Stream Side A	0.25	0.40	0.25	0.25	0.25
Net Improvement – Stream Side B	0.25	0.40	0.25	0.25	0.25
Type of Protection	0.20	0.20	0.20	0.20	0.20
Mitigation Timing	0.10	0.10	0.10	0.10	0.10
Comparative Stream Order	0.20	0.20	0.20	0.20	0.20
Location	0.10	0.10	0.10	0.10	0.10
Sum of Factors (M)	1.10	1.40	1.10	1.10	1.10
Linear Feet (L)	1,725	190	3,179	400	2,425
Reach Multiplier (RM)	1.25	1.25	1.25	1.25	1.25
<b>Total Riparian Credits (M × L × RM)</b>	<b>2,409</b>	<b>332</b>	<b>4,371</b>	<b>550</b>	<b>3,334</b>
<b>Total Riparian Credits = 10,996</b>					

With the exception of the Coyote Creek spring area, which was undisturbed during construction activities, a net improvement factor of 0.25 for each side of the stream for the entire site was used for the riparian credit calculation. This value was based on the minimum creditable riparian width of 25 feet on either side of the new stream channel (50 feet total) to minimize conflict with proposed wetland credit areas. A protection factor of 0.20 was used based on the federal and state agency ownership of the site and executed conservation easement. A mitigation timing factor of 0.10 was used based on the development of the stream credits before any impact debits. Both Coyote and Schrieber Creeks are considered 1<sup>st</sup> Order streams by the approved mitigation plan. These streams become 2<sup>nd</sup> Order when they merge at the lower end of the project area. To determine the comparative stream order factor for each segment, a same order factor of 0.20 was used. As the developed mitigation credits will likely be used to offset impacts within the watershed more than 0.5 mile away, the off-site factor of 0.10 was used.

**Table 2-38. Determination of Stream Mitigation Credits for Schrieber Meadows**

Factors	Upper Coyote Creek (USFS)	Coyote Creek Spring Area	Middle Coyote Creek (MDT)	Perennial Spring Channel	Merged Coyote/Schrieber Creeks
Net Improvement	2.50	0.00	2.50	2.50	2.50
Stream Status	0.05	0.05	0.05	0.05	0.05
Type of Protection	0.20	0.20	0.20	0.20	0.20
Mitigation Timing	0.10	0.10	0.10	0.10	0.10
Comparative Stream Order	0.20	0.20	0.20	0.20	0.20
Location	0.10	0.10	0.10	0.10	0.10
Sum of Factors (M)	3.15	0.65	3.15	3.15	3.15
Linear Feet (L)	1,752	190	3,179	400	2,425
<b>Total Stream Credits (M × L)</b>	<b>5,519</b>	<b>123</b>	<b>10,014</b>	<b>1,260</b>	<b>7,639</b>
<b>Total Stream Credits = 24,555</b>					
<b>Total Mitigation Credits (Riparian + Stream) = 10,996 + 24,555 = 35,551</b>					

To determine stream credits for the Coyote and Schrieber Creek corridors, many of the same factors that were used in the riparian credit calculations were repeated. The only exception was the net improvement factor for stream credits, where a factor of 2.5 for substantial improvement was assigned. No net improvement factor for the Coyote Creek spring area was included because this area was not constructively changed.

Stream credits reported here are based on the designed stream lengths, as presented in the mitigation plan. With the exception of woody plant survival criteria, the site has achieved the riparian buffer success and channel restoration success criteria to date. Both the stream channel and creditable buffer areas have greater than 70 percent aerial cover by deep-rooting vegetation and less than 10 percent cover by state-listed noxious weeds. The construction technique employed for creating the new channels did not disturb the stream banks, which are predominantly covered by reed canary grass (plant stability rating of 9). The riparian success criteria pertaining to woody plant survival of greater than 50 percent after 5 years has not been achieved. An approximate 5 percent survival rate for the planted woody species was estimated in 2017. The 35,551 stream credits calculated for this site following construction achieves the goals for the stream mitigation component of the Schrieber Meadows project.

The 2008 MDT MWAM was used to evaluate the site in 2010 and 2012 through 2017. The 2010 functional assessment incorporated the three constructed wetland cells and enhanced wetlands into one AA. These wetlands received a Category II rating with 68 percent of the total possible points in 2010. In 2012, the acreage of the project area increased to include the additional constructed wetlands cells, restored wetlands, and enhanced wetlands. These additions resulted in the assessment of three separate AAs from 2012 to 2017 (Table 2-39). The score for listed/proposed T&E species habitat function was increased to high because of the presence of grizzly bears in the area as reported by MFWP and US Fish and Wildlife Service (USFWS) biologists in 2015.

**Table 2-39. Functions and Values at the Schrieber Meadows Site From 2010 and From 2012 Through 2017 (Page 1 of 3)**

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2010 Creation/ Enhancement AA	Enhancement AA					
		2012	2013	2014	2015	2016	2017
Listed/Proposed T&E Species Habitat	Low (0.1)	Low (0.3)	Low (0.3)	Low (0.3)	High (0.8)	High (0.8)	High (0.8)
Montana Natural MTNHP Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Mod (0.7)	High (0.9)	Exc (1.0)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	N/A	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	Mod (0.6)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	Mod (0.6)	N/A	N/A	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/ Food Chain Support	Mod (0.5)	High (0.8)	High (0.8)	High (0.8)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.3)	Mod (0.4)	Mod (0.4)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
Recreation/Education Potential	Low (0.5)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>5.45/8</b>	<b>7.1/9</b>	<b>7.2/9</b>	<b>8.0/10</b>	<b>8.7/10</b>	<b>8.7/10</b>	<b>8.7/10</b>
<b>% of Possible Score Achieved</b>	<b>68%</b>	<b>79%</b>	<b>80%</b>	<b>80%</b>	<b>87%</b>	<b>87%</b>	<b>87%</b>
<b>Overall Category</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>I</b>	<b>I</b>	<b>I</b>	<b>I</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>4.84</b>	<b>13.22</b>	<b>13.22</b>	<b>13.22</b>	<b>13.22</b>	<b>13.22</b>	<b>13.22</b>
<b>Functional Units (acreage x actual points)</b>	<b>26.38</b>	<b>93.86</b>	<b>95.18</b>	<b>105.76</b>	<b>115.01</b>	<b>115.01</b>	<b>115.01</b>

**Table 2-39. Functions and Values at the Schrieber Meadows Site From 2010 and From 2012 Through 2017 (Page 2 of 3)**

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2010 Creation/ Enhancement AA	Creation AA					
		2012	2013	2014	2015	2016	2017
Listed/Proposed T&E Species Habitat	Low (0.1)	Low (0.3)	Low (0.3)	Low (0.3)	High (0.8)	High (0.8)	High (0.8)
MTNHP Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Mod (0.7)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Fish/Aquatic Habitat	N/A	Mod (0.6)	High (0.8)	High (0.8)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Flood Attenuation	N/A	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	Mod (0.6)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	Mod (0.6)	Mod (0.7)	Mod (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/ Food Chain Support	Mod (0.5)	High (0.8)	High (0.8)	High (0.8)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)
Recreation/Education Potential	Low (0.5)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>5.4 /8</b>	<b>8.3/11</b>	<b>8.5/11</b>	<b>8.8/11</b>	<b>9.3/11</b>	<b>9.3/11</b>	<b>9.3/11</b>
<b>% of Possible Score Achieved</b>	<b>68%</b>	<b>75%</b>	<b>77%</b>	<b>80%</b>	<b>85%</b>	<b>85%</b>	<b>85%</b>
<b>Overall Category</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>I</b>	<b>I</b>	<b>I</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>4.84</b>	<b>22.40</b>	<b>22.43</b>	<b>22.43</b>	<b>22.43</b>	<b>22.43</b>	<b>22.43</b>
<b>Functional Units (acreage x actual points)</b>	<b>26.38</b>	<b>185.92</b>	<b>190.66</b>	<b>197.38</b>	<b>208.60</b>	<b>208.60</b>	<b>208.60</b>

**Table 2-39. Functions and Values at the Schrieber Meadows Site From 2010 and From 2012 Through 2017 (Page 3 of 3)**

Function and Value Parameters From the 2008 MDT Montana Wetland Assessment Method <sup>(a)</sup>	2010 Creation/ Enhancement AA	Restoration AA					
		2012	2013	2014	2015	2016	2017
Listed/Proposed T&E Species Habitat	Low (0.1)	Low (0.3)	Low (0.3)	Low (0.3)	High (0.8)	High (0.8)	High (0.8)
MTNHP Species Habitat	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Wildlife Habitat	Mod (0.7)	High (0.9)	High (0.9)	High (0.9)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	N/A	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.5)	Mod (0.5)	Mod (0.5)
Short- and Long-Term Surface-Water Storage	Mod (0.6)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Sediment/Nutrient/Toxicant Removal	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.6)	Mod (0.6)	Mod (0.6)
Sediment/Shoreline Stabilization	Mod (0.6)	Low (0.3)	Low (0.3)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/ Food Chain Support	Mod (0.5)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Exc. (1.0)	Exc. (1.0)	Exc. (1.0)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential	Low (0.5)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)	High (0.2)
<b>Actual Points/Possible Points</b>	<b>5.4 /8</b>	<b>6.7/10</b>	<b>6.7/10</b>	<b>7.4/10</b>	<b>8.2/10</b>	<b>8.2/10</b>	<b>8.2/10</b>
<b>% of Possible Score Achieved</b>	<b>68%</b>	<b>67%</b>	<b>67%</b>	<b>74%</b>	<b>82%</b>	<b>82%</b>	<b>82%</b>
<b>Overall Category</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>I</b>	<b>I</b>	<b>I</b>
<b>Acreage of Assessed Aquatic Habitats Within Easement (acres)</b>	<b>4.84</b>	<b>3.46</b>	<b>3.46</b>	<b>3.46</b>	<b>3.46</b>	<b>3.46</b>	<b>3.46</b>
<b>Functional Units (acreage x actual points)</b>	<b>26.38</b>	<b>23.18</b>	<b>23.18</b>	<b>25.60</b>	<b>28.37</b>	<b>28.37</b>	<b>28.37</b>

(a) Berglund and McElDowney, 2008.

The 2012 through 2017 Restoration AA included 3.46 acres of preexisting wetlands within the footprint of the excavated cells. The AA includes both aquatic bed and emergent wetland habitats. The assessment score increased by 8 percentage points to 82 percent and the functional units totaled 28.37. The AA was rated as a Category I wetland, scored excellent for general wildlife habitat and production export/food chain support, and scored high for listed/proposed T&E species habitat, MTNHP species habitat, short- and long-term surface-water storage, sediment/shoreline stabilization, groundwater/discharge/recharge, and recreation/education potential. Production export/food chain support shifted from a moderate to excellent rating in 2015 because of the observation of an unrestricted water-surface outlet to Coyote Creek. General wildlife habitat shifted from a high to excellent rating for this AA in 2015 because of the change in disturbance rating from moderate to low.

The 13.22-acre Enhancement AA included existing wetlands located between the stream mitigation portion of the project area and the US Highway 2 corridor. The AA achieved 87 percent of the possible score in 2017. Because of a confirmed sighting of a grizzly bear in the project area, the score for listed/proposed T&E species habitat was increased to a high rating. The AA received a Category I rating and 115 functional units. High ratings were assessed for listed/proposed T&E species habitat, general wildlife habitat, MTNHP species habitat, short- and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, groundwater/discharge/recharge, and recreation/education potential. Production export/food chain support shifted from a high to excellent rating in 2015 because of the observation of a restricted water-surface outlet.

The 2012 through 2017 Creation AA included all of the wetland areas within the site that were not identified as wetland habitat during the baseline delineation and that were located outside of the riparian buffer area along the constructed channels. An increase of wetlands, above the anticipated target of 6.53 acres, has developed on site because of the substantially increased water table elevation observed site-wide. This 22.43-acre AA was rated as a Category I wetland in 2017 with 85 percent of the possible points, which is an increase of 5 percent since 2014, and 208.6 functional units. This AA received high ratings in listed/proposed T&E species habitat, MTNHP species habitat, general wildlife habitat, short- and long-term surface-water storage, sediment/nutrient/toxicant removal, sediment/shoreline stabilization, groundwater/discharge/recharge, and recreation/education potential. General fish/aquatic habitat shifted from a high to moderate rating because of no fish species observed during the 2015 survey. Production export/food chain support shifted from a high to excellent rating in 2015 because of the observation of restricted surface and subsurface water outlets.

The current site conditions documented in 2017 are compared to the approved performance standards and success criteria in Table 2-40. The wetlands that were delineated in 2017 met the performance standards approved for this site, which included meeting the three parameter criteria for hydrology, vegetation, and soils. Hydrophytic vegetation success has been achieved based on the absolute cover of facultative or wetter species of 70 percent or greater. Open-water areas were given full credit based on the stated goal of the project to provide open water within the excavated depressions during the spring and early summer. Weed cover site-wide and within the upland buffers did not exceed 5 percent and met the success criteria. Isolated weed infestations were mapped throughout the mitigation site and are controlled by MDT as mandated by the performance standards. The upland buffer success criteria have been achieved as these areas have at least 50 percent aerial cover of nonweed species and noxious weeds do not exceed 5 percent cover.

**Table 2-40. Summary of Performance Standards and Success Criteria at Schrieber Meadows in 2017 (Page 1 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Wetland Characteristics	The three parameter criteria for hydrology, vegetation, and soils are met as outlined in the 1987 Wetland Manual and the 2010 Regional Supplement.	Y	Areas that were identified as wetland habitat within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Areas that were identified as wetland habitat within the mitigation site exhibit soil saturation for a minimum 12.5 percent of growing season.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	Hydric soil characteristics have developed throughout a majority of the constructed wetlands.
	Soil is sufficiently stable to prevent erosion.	Y	Disturbed soil is stable and does not exhibit signs of erosion.
	Soil is able to support plant cover.	Y	Plant cover is well established across disturbed soils.
Hydrophytic Vegetation	Combined absolute cover of facultative or wetter species is 70 percent or greater.	Y	Areas that were identified as wetland habitat within the mitigation site support a prevalence of hydrophytic vegetation (OBL, FACW, and FAC).
	State-listed noxious weeds do not exceed 5 percent absolute cover.	Y	State-listed noxious weeds are estimated well below 5 percent absolute cover within wetland areas.
Riparian Buffer Success	Woody and riparian vegetation is established.	N	No woody-dominated communities have formed along the established riparian buffer; riparian vegetation (primarily reed canary grass) has been established.
	Noxious weeds do not exceed 10 percent cover within the riparian buffer areas.	Y	State-listed noxious weeds are estimated at 1–3 percent absolute cover within riparian buffer.
	Creditable buffer areas must have at least 50 percent aerial cover of nonnoxious weed species by the end of the monitoring period.	Y	Nonnoxious vegetation consist of nearly 100 percent of total vegetation cover within riparian buffer.
	Combined aerial cover of riparian and stream bank vegetation communities is 70 percent or greater.	Y	Riparian and stream bank vegetation communities support nearly 100 percent cover.
	Planted trees and shrubs will be considered successful where they exhibit 50 percent survival after 5 years.	N	After plantings, the majority of the site supported standing water and likely drowned out 90 percent of the plantings by the end of the second growing season. Approximately 3 percent survival was noted in 2017. MDT is currently working with the USFS Kootenai National Forest to coordinate a replanting plan in appropriate riparian buffer areas within the site that are not inundated by high water levels.

**Table 2-40. Summary of Performance Standards and Success Criteria at Schrieber Meadows in 2017 (Page 2 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Channel Restoration Success	Revegetation along the new Coyote and Schrieber Creek channel corridors will be considered successful when banks are vegetated with a majority of deep-rooting riparian and wetland herbaceous and woody plant species.	Y	The majority of stream bank vegetation along the constructed Coyote and Schrieber Creek channel corridors is dominated by reed canary grass, which has a stability rating of 9.
	The intent of the stream restoration is to allow the stream to naturally migrate within the floodplain and to give it enough room to move and stabilize itself within the site.	Y	The stream has plenty of space within the floodplain for natural migration. The stream currently appears to be stable with no lateral adjustment observed following construction.
Stream Bank Vegetation	Banks are vegetated with a majority of deep-rooting riparian plant species that have root-stability indices of 6 or greater.	Y	Reed canary grass and foxtail ( <i>Alopecurus</i> sp.) dominate the stream banks. Reed canary grass has a root-stability index of 9. <i>Alopecurus</i> species found at the site have root stability index values of 3 for short-awned foxtail and 4 for Garrison creeping foxtail.
Open Water	The project will provide open water during the spring and early summer within excavated depressions. As the growing season progresses and the groundwater levels recede, vegetation is anticipated to germinate within the majority of the depressions. Open water with submerged and/or floating vegetation will, therefore, be considered successful and creditable.	Y	Excavated depressions within the upper reach of the site experience seasonal drawdown, and rooted hydrophytic vegetation development has been observed. The lower depressions appear to support perennial inundation with established aquatic macrophyte community.
Upland Buffer	Noxious weeds do not exceed 5 percent cover within upland buffer area.	Y	Noxious weed cover is less than 5 percent within the upland buffer.
	Any area disturbed within the creditable buffer zone must have at least 50 percent aerial cover of nonweed species by the end of the monitoring period.	Y	Disturbed areas have established greater than 50 percent cover by nonweed species.
Weed Control	Weed control will be based on annual site monitoring to determine weed species and degree of infestation within the site. Control measures based on the monitoring results will be implemented by MDT to minimize and/or eliminate the intrusion of state-listed noxious weed species within the site.	Y	State-listed noxious weed species across the site have been monitored and mapped during each post-construction monitoring event. MDT administers an ongoing weed-control program.

Table 2-40 also provides a summary of performance standards and success criteria for the constructed streams and riparian buffers. The restored channel has met the defined success criteria by supporting deep-rooted vegetation along the stream banks and a floodplain capable of supporting lateral migration within the site. The riparian buffer has achieved the success criteria associated with the



development of greater than 70 percent vegetation cover while supporting less than 10 percent cover by noxious weeds. However, the success criteria that indicates 50 percent survival of planted trees and shrubs after 5 years has not been achieved. Higher-than-expected water levels across the site and perennial inundation appear to inhibit the survival and development of woody species within the site. No woody communities were identified within the site in 2017. Robust reed canary grass made seeing small shrubs throughout much of the site difficult.

Fifteen infestations of state-listed Priority 2A and 2B noxious weeds were treated in 2017. Weed-control activities were conducted on August 2, 2017. Weed spraying has been conducted annually within the site to eliminate the predominant Canadian thistle infestations. MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds identified at each location and treatment to contain and control identified populations.

No man-made water-control structures were installed on the property. Two nest boxes were in place on the fence posts at the site entrance gate. The boxes were in good condition with signs of continued use.

## 2.11 SILICON MOUNTAIN (BUTTE DISTRICT, YEAR 3)

The Silicon Mountain Aquatic Resource Mitigation 2017 Monitoring Report presents the results the third year of post-construction monitoring at the Silicon Mountain mitigation area. Butte Silver Bow County (BSBC) and MDT partnered in 2011 to provide compensatory mitigation for both stream and wetland impacts associated with the BSBC proposed Silicon Mountain Tech Park and Port road realignment project and to serve as a mitigation bank for future transportation projects within Watershed #2 – Upper Clark Fork of the Columbia River.

The MDT Silicon Mountain mitigation project is located south of Interstate I-90 and west of Interstate I-15, approximately 5 miles west of Butte, MT within Township 3 North, Range 9 West, Section 24 Silver Bow County, Montana. The 50.1-acre site lies within the boundaries of Watershed #2 – Upper Clark Fork of the Columbia River. In 2011, BSBC purchased land Parcels 1 (18.91 acres) and 2 (26.1 acres) from the Ueland family, located north of the new roadway alignment. BSBC partnered with MDT and placed the property under a perpetual conservation easement to protect the wetland and stream resource attributes established and restored within the site. This conservation easement was extended to include approximately 0.96 acre of property previously owned by BSBC, in the immediate vicinity of the new roadway alignment.

The goals of the mitigation project include preserving, restoring, and establishing wetland, riparian, and upland habitats. Specifically, the mitigation goals include the following:

- Establish 6.77 acres of emergent and scrub/shrub wetland by excavating and creating six wetland cells
- Protect the existing 10.06 acres of emergent and scrub/shrub wetland
- Restore upland, wetland, and riparian areas that were impacted by the new roadway alignment by seeding and planting mostly native graminoids, shrubs, and trees

- Restore and reconstruct approximately 3,250 linear feet of the Sand Creek channel to its historic natural condition
- Relocate and restore approximately 650 linear feet of the Sand Creek channel on privately owned property south of the realignment project
- Restore approximately 4,400 linear feet of the Sand Creek channel.

### 2.11.1 Wetland Mitigation Credits

Table 2-41 summarizes the current estimated wetland credits based on the USACE-approved credit ratios [USACE, 2005] and the wetland delineation completed in June 2017. A total of 27.9 creditable acres were delineated at the Silicon Mountain site in 2017, including 6.3 acres of wetland creation, 10.3 acres of wetland preservation, 0.50 acre of wetland restoration, and 10.8 acres of upland buffer. Applying the USACE-approved ratios to these values, a total of 11.36 acres of mitigation credit have been estimated in 2017, a value very close to the targeted 11.45 acres anticipated at this site. The attainment of the full target value of 11.45 credit acres is likely in subsequent monitoring years, as wetland vegetation and hydrology develop further within the site. Accounting for the 4.33 credit acres that Butte Silverbow is seeking from the project, a net of approximately 6.7 credit acres are available for MDT to use as mitigation reserve within Watershed # 2 – Upper Clark Fork River Basin.

### 2.11.2 Stream Mitigation Credit

Anticipated mitigation credits produced by the Silicon Mountain Aquatic Resource Mitigation Project were calculated following guidelines provided in the USACE 2010 *Montana Stream Mitigation Procedure* (MTSMP). Approximately 4,300 feet of Sand Creek was addressed as part of the project, and MDT is seeking to obtain credit for 3,900 feet as outlined in Table 2-42. MDT is not seeking to obtain mitigation credits for 400 of the 4,300 feet of channel addressed within the project reach, including 100 feet that lies within the railroad right-of-way, and 300 feet that was rippedrapped under the newly constructed bridge. MDT anticipates 12,369.5 stream and riparian mitigation credits if all of the success criteria are met.

To date, the project meets the two success criteria established for stream mitigation components of the project. Stream mitigation criteria include channel restoration and vegetation along the stream banks. Subsequent monitoring events will document whether the site continues to achieve success as defined by these standards or if additional maintenance is needed.

The 2008 MDT MWAM was used to evaluate the functional values of the created wetlands from 2015 through 2017. Two AAs were assessed from 2015 -2017 that included created wetland Cells 2, 3, and 4, and created wetland Cells 1 and 5. In 2016, a third assessment was completed for the preservation wetlands (Table 2-43). The created wetland cells were classified into separate AAs based on perennial hydrology and open water observed during the monitoring site visits in Cells 1 and 5 and seasonal hydrology and saturation observed in Cells 2, 3, and 4. As hydrology stabilizes at the site, these AAs will likely shift in subsequent monitoring years.

**Table 2-41. Wetland Mitigation Credits Estimated for the Silicon Mountain Mitigation Site From 2015 Through 2017**

Compensatory Mitigation Type	Mitigation Area Description	Wetland Type <sup>(a)</sup>	Anticipated Mitigation Surface Area (acres)	USACE-Approved Mitigation Ratios	Anticipated Mitigation Credit (acres)	2015 Delineated Acres	2015 Mitigation Credit (acres)	2016 Delineated Acres	2016 Mitigation Credit (acres)	2017 Delineated Acres	2017 Mitigation Credit (acres)
Creation (Establishment)	Wetland Cells 1, 2, 3, 4, and 5	Palustrine emergent, aquatic bed	6.77	1:1	6.77	6.19	6.19	6.30	6.30	6.30	6.30
Restoration <sup>(a)</sup>	Existing wetland areas	Palustrine emergent		1:5:1	0	0	0	0	0	0.50	0.33
Preservation	Existing wetland areas	Palustrine emergent, scrub/shrub	10.06	4:1	2.52	10.24	2.56	10.30	2.57	10.30	2.57
Upland Buffer	50-foot wide upland perimeter	N/A	10.80	5:1	2.16	10.80	2.16	10.80	2.16	10.80	2.16
<b>Totals</b>			<b>27.63</b>		<b>11.45</b>	<b>27.23</b>	<b>10.91</b>	<b>27.40</b>	<b>11.03</b>	<b>27.90</b>	<b>11.36</b>

(a) In 2017, two small wetland areas were mapped as part of Type 4 (existing wetland) but were not part of the original delineation (because of land use before the mitigation project); this acreage would fall under restoration (rehabilitation).

Actual delineated acres exceeded the creditable acres; therefore, only the requested acreage is reported.

**Table 2-42. Summary of Anticipated Stream Mitigation Credits From the Silicon Mountain Mitigation Project**

Mitigation Reach	Linear Feet	Sum of Mitigation Factors <sup>(a)</sup>	Mitigation Credits
Reach 1	3,250	3.20	10,400
Reach 2	650	3.03	1,969.5
<b>Total</b>	<b>3,900</b>		<b>12,369.5</b>

(a) From Table 7 of *Silicon Mountain Aquatic Resource Mitigation Plan* [Confluence Consulting, Inc., 2013].

The AA for created wetland Cells 2, 3, and 4 increased slightly from 3.1 acres in 2015 to 3.3 acres in 2016 and 2017; was characterized by wetland community Types 6 – *Puccinellia nuttalliana/Deschampsia caespitosa* and 11 – *Typha latifolia*; and was rated as a Category III wetland with 48 percent of the total possible points in 2017. This AA received a high functional rating for sediment/nutrient/toxicant removal and moderate ratings for short- and long-term surface-water storage, production export/food chain support, groundwater discharge/recharge, and MTNHP species habitat. The rating for this AA is expected to increase as the disturbed areas recover when desirable vegetation cover increases and hydrology stabilizes at the site.

The AA for created wetland Cells 1 and 5 encompassed 3.5 acres of excavated wetland cells; was characterized by wetland community Type 7 – Open Water/Aquatic Macrophytes; and was rated as a Category III wetland with 55 percent of the total possible points in 2017. This AA received high functional ratings for short- and long-term surface-water storage and groundwater discharge/recharge. Moderate ratings for were assessed for sediment/nutrient/toxicant removal, production export/food chain support, general wildlife habitat, and MTNHP species habitat. The rating for this AA is expected to increase as the disturbed areas recover and desirable vegetation cover increases.

The AA for the preservation wetlands encompassed 10.8 acres, including 0.5 acre of open water. This AA was rated as a Category III wetland with 55 percent of the total possible points for 2017. This AA received high functional ratings for short- and long-term surface-water storage and groundwater discharge/recharge. Moderate ratings for were assessed for sediment/nutrient/toxicant removal, production export/food chain support, sediment/shoreline stabilization, general wildlife habitat, and MTNHP species habitat.

Table 2-43. Functions and Values of the Silicon Mountain Site From 2015 Through 2017

Function and Value Parameters From the 2008 MDT MWAM <sup>(a)</sup>	2015 AA 1 (Created Wetland Cells 2, 3, and 4)	2015 AA 2 (Created Wetland Cells 1 and 5)	2016 AA 1 (Created Wetland Cells 2, 3, and 4)	2016 AA 2 (Created Wetland Cells 1 and 5)	2016 AA 3 (Preservation Wetlands) <sup>(b)</sup>	2017 AA 1 (Created Wetland Cells 2, 3, and 4)	2017 AA 2 (Created Wetland Cells 1 and 5)	2017 AA 3 (Preservation and Restored Wetlands) <sup>(b, c)</sup>
Listed/Proposed T&E Species Habitat	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)	Low (0.0)
MTNHP Species Habitat	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)	Mod (0.5)
General Wildlife Habitat	Low (0.3)	Mod (0.5)	Low (0.3)	Mod (0.5)	Mod (0.5)	Low (0.3)	Mod (0.5)	Mod (0.5)
General Fish/Aquatic Habitat	N/A	N/A	N/A	N/A	N/A	N/A	NA	NA
Flood Attenuation	N/A	Mod (0.6)	Mod (0.6)	Mod (0.6)	Mod (0.6)	N/A	Mod (0.6)	Mod (0.6)
Short- and Long-Term Surface-Water Storage	Mod (0.6)	High (0.8)	Mod (0.6)	High (0.8)	High (0.8)	Mod (0.6)	High (0.8)	High (0.8)
Sediment/Nutrient/Toxicant Removal	High (0.8)	Mod (0.7)	High (0.8)	Mod (0.7)	Mod (0.7)	High (0.8)	Mod (0.7)	Mod (0.7)
Sediment/Shoreline Stabilization	N/A	Low (0.3)	NA	Low (0.3)	Mod (0.7)	N/A	Low (0.3)	Mod (0.7)
Production Export/Food Chain Support	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)	Mod (0.7)
Groundwater Discharge/Recharge	Mod (0.7)	High (1.0)	Mod (0.7)	High (1.0)	High (1.0)	Mod (0.7)	High (1.0)	High (1.0)
Uniqueness	Low (0.1)	Low (0.3)	Low (0.1)	Low (0.3)	Low (0.3)	Low (0.1)	Low (0.3)	Low (0.2)
Recreation/Education Potential	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)	Low (0.05)
<b>Actual Points/Possible Points</b>	<b>3.75/8</b>	<b>5.45/10</b>	<b>4.35/9</b>	<b>5.45/10</b>	<b>5.75/10</b>	<b>4.35/9</b>	<b>5.45/10</b>	<b>5.75/10</b>
<b>% of Possible Score Achieved</b>	<b>47%</b>	<b>55%</b>	<b>48%</b>	<b>55%</b>	<b>58%</b>	<b>48%</b>	<b>55%</b>	<b>55%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>III</b>
<b>Total Acreage of Assessed Wetlands Within Site Boundaries (ac)</b>	<b>3.1</b>	<b>3.1</b>	<b>3.3</b>	<b>3.0</b>	<b>10.3</b>	<b>3.3</b>	<b>3.5</b>	<b>10.8</b>
<b>Functional Units (acreage x actual points)</b>	<b>11.63</b>	<b>16.90</b>	<b>14.35</b>	<b>16.35</b>	<b>59.22</b>	<b>14.35</b>	<b>18.93</b>	<b>62.10</b>

(a) Berglund and McEldowney [2008].

(b) Preservation wetlands were assessed in 2016 for the first time.

(c) Restored wetlands were assessed in 2017 for the first time.

Table 2-44 provides a summary of the site conditions in relation to the established performance standards and success criteria. This site meets the established performance standards with the exception of the success criteria that measure hydrophytic vegetation cover, soil stability, and its ability to support vegetation cover and noxious weed cover. All of the wetlands delineated within the Silicon Mountain site in 2017 met the three criteria outlined in the 1987 Wetland Manual and 2010 WMVC Regional Supplement but exhibited less than 70 percent desirable hydrophytic vegetation cover and more than 10 percent cover of noxious weeds. Created wetland areas alone exhibited less than 10 percent cover from noxious weeds and less than 70 percent hydrophytic vegetation cover. Upland buffer areas also exhibited more than 10 percent cover of noxious weed infestations. MDT implements weed-control measures based on the results of field surveys to minimize and/or eliminate the intrusion of state-listed noxious weed species within the site. Comprehensive site monitoring has occurred for 3 years and will be conducted for a minimum period of 5 years as determined by the USACE Montana Regulatory Office's review of annual monitoring reports for the site and attainment of wetland and stream success criteria.

A total of 11 infestations of state-listed Priority 2B noxious weeds were mapped at the Silicon Mountain site. Four infestations of spotted knapweed, three infestations of Canada thistle, two infestations of leafy spurge, and two infestations of butter-and-eggs (*Linaria vulgaris*) were identified in areas that range from low percent cover (1–5 percent) to moderate (6–25 percent). MDT has an ongoing weed-control program for their mitigation sites that includes an annual assessment of weeds that are identified at each location and treatment to contain and control identified populations. MDT's weed contractor sprayed weed infestations located across the mitigation site on July 18, 2017, using the herbicides Opensight and Range Star. Because of long-term grazing and disturbance at this site, weed control will likely be required for several more years to contain and control noxious weed populations.

No diversions or nesting structures are currently installed at the site. Fences that were installed around the site were in good condition at the time of the 2017 investigation. Several thousand willow sprigs were installed with approximately 18–24 inches of the stems exposed. Exposing this sprig length may cause higher mortality because they tend to generate a large number of new stems and leaves during the first two growing seasons that cannot be supported by the root growth of the plant. To date, willow sprig survival is excellent; approximately 85 percent of stems show new stem shoots and leaf growth.

**Table 2-44. Summary of Performance Standards and Success Criteria at the Silicon Mountain Site in 2017 (Page 1 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Wetland Characteristics	The three parameter criteria for hydrology, vegetation, and soils are met as outlined in the 1987 Wetland Manual and 2010 WMVC Regional Supplement.	Y	Areas that are identified as wetland habitat within the mitigation site meet the three parameter criteria.
Wetland Hydrology	Soil saturation is present for at least 12.5 percent of the growing season.	Y	Areas that are identified as wetland habitat within the mitigation site exhibit soil saturation for a minimum 12.5 percent of growing season.
Hydric Soil	Hydric soil conditions are present or appear to be forming.	Y	Hydric soil characteristics are developing throughout a majority of the constructed wetlands.
	Soil is sufficiently stable to prevent erosion.	N	Disturbed soil is not yet stable and does exhibit minor signs of erosion around wetland Cell 5. In 2017 there were several rills and gullies noted on the southern slope of wetland Cell 5, north of the newly constructed bike path, west of DP-2U, which resulted in sediment deposition.
	Soil is able to support plant cover.	N	Plant cover is slowly establishing across recently disturbed soils.
Hydrophytic Vegetation	Success is achieved where combined absolute cover of facultative or wetter species is $\geq 70$ percent.	Y	Created wetland cells support 70 percent or greater cover of hydrophytic vegetation (OBL, FACW, and FAC).
	State-listed noxious weeds do not exceed 10 percent absolute cover.	Y	Montana state-listed noxious weeds are estimated below 10 percent absolute cover within wetland areas.
Channel Restoration Success	Revegetation along the new Sand Creek channel corridor will be considered successful when banks are vegetated with a majority of deep-rooting riparian and wetland herbaceous and woody plant species.	Y	The majority of stream bank vegetation along the constructed Sand Creek channel corridor is dominated by vegetation communities with stability ratings greater than 6.
	The intent of the stream restoration is to allow for the stream to naturally migrate within the floodplain and to give it enough room to move and stabilize itself within the site.	Y	The stream has plenty of space within the floodplain for natural migration. The stream currently appears to be stable with no lateral adjustment observed after construction.

**Table 2-44. Summary of Performance Standards and Success Criteria at the Silicon Mountain Site in 2016 (Page 2 of 2)**

Performance Standards	Success Criteria	Criteria Achieved Y/N	Discussion
Stream Bank Vegetation	Banks are vegetated with a majority of deep-rooting riparian plant species that have root stability indexes $\geq 6$ .	Y	The majority of stream bank vegetation along the constructed Sand Creek channel corridor is dominated by vegetation communities with stability ratings $> 6$ .
Open Water	The project is intended to provide seasonal open water during the spring and early summer within excavated depressions. As the growing season progresses and the groundwater levels recede, vegetation is expected to germinate within the majority of the depressions. Open water with submerged and/or floating vegetation will, therefore, be considered successful and creditable.	Y	Wetland Cells 2, 3, and 4 experience seasonal drawdown; rooted hydrophytic vegetation development has been observed; and wetland Cells 1 and 5 appear to support perennial inundation and a developing aquatic macrophyte community.

## 2.12 US 93 NORTH – PETERSON (MISSOULA DISTRICT, YEAR 9)

The US 93 North mitigation sites were developed to mitigate wetland impacts associated with eight MDT segments of the US 93 Evaro to Polson highway reconstruction project along US Highway 93. Five mitigation sites were developed along this corridor. The 2017 monitoring effort documented the ninth year at Peterson. Bouchard, Mission Creek, Mud Creek, and Jocko Spring Creek were not monitored in 2017. All five mitigation sites are located in Lake County in Watershed #3 – Lower Clark Fork, north of Arlee, Montana, between Mileposts 20 and 50.

The 30-acre Peterson site is located south of Milepost 36 in Section 2 of Township 16 North and Range 20 West. The Peterson site consists of a riparian wetland corridor that is associated with an unnamed perennial tributary to Post Creek and is dominated by herbaceous vegetation. Site hydrology is provided by an unnamed perennial tributary to Post Creek. Mitigation objectives included the following:

- Construct impoundments using 12 log crib structures and earthen berms
- Excavate an oxbow basin along the outer fringe of existing wetland boundaries
- Plant shrubs and herbaceous plugs within the oxbow basin, wetland fringe, and log crib structures.



The targeted wetland types were scrub-shrub and emergent vegetation classes, encompassing thin-leaf alder (*Alnus incana*), red osier dogwood, Nebraska sedge (*Carex nebrascensis*), and Baltic rush (*Juncus balticus*) communities. Revegetation work at this site was completed in October 2006.

The wetland acreage delineated in 2017 totaled 3.2 acres, an increase of 0.11 acre since 2014. Table 2-45 summarizes the 2017 estimated credits for the Peterson site. The 2011 estimated credits were separated into individual mitigation types. The acreages were calculated for each type and credit ratios were applied for the Confederated Salish and Kootenai Tribes (CSKT) and USACE crediting systems. The Peterson mitigation types were creation and rehabilitation for the USACE system and creation and secondary restoration for the CSKT system.

The following equation was used to calculate the USACE enhancement ratio for rehabilitation activities based on the total functional assessment point scores listed in Table 2-46. The formula was developed to measure the post-construction functional lift expected to occur after rehabilitation of the mitigation site.

$$\text{Enhancement factor} = (F_{\text{post}} - F_{\text{pre}}) / F_{\text{pre}}$$

$$\text{Enhancement factor} = (8.6 - 5.3) / 5.3; \text{ Enhancement factor} = 0.62$$

$$\text{Enhancement ratio} = 1 / 0.62 = 1.61$$

The site has earned 2.73 USACE credit acres and 1.25 CSKT credit acres to date. These 2017 credit estimates have exceeded the USACE projected credit for the project (2.39 credit acres) but still fall somewhat short of the CSKT projected credit (1.31 credit acres) for the mitigation site.

Results of the 2004 (baseline), 2008 through 2011, and 2013 through 2017 functional assessment are summarized in Table 2-45. The 1999 MDT MWAM [Berglund, 1999] was used to complete functional assessments at the site since monitoring began. The total aquatic habitat developed to date within the 25-acre project area is 3.2 acres.

The Peterson property was evaluated as one AA (AA-1) that increased to 3.2 acres in 2015 from 3.09 acres in 2013 and 2014. This AA was rated as a Category II wetland in 2017 with 78 percent of the total possible points and 27.52 total functional units. The AA rating in 2017 was similar to ratings determined in 2016. In 2014, a gain of 7 percentage points was realized and was the result of the documented sighting of a grizzly bear on site and improved structural diversity as shrub/scrub habitat continues to develop on the site. The rating for the T&E species habitat function increased from low to high in 2014. The functional unit gain from 2014 to 2017 was 0.95. The decrease in total functional units from 2011 to 2016 corresponds with the overall decrease of wetland acreage at the Peterson site, which is presumably the result of multiple log crib structure failures. The majority of the failures occurred at the western end of the property. Functional ratings were high for listed/proposed T&E species habitat, general wildlife habitat, flood attenuation, short- and long-term surface-water storage, sediment/shoreline stabilization, sediment/nutrient/toxicant removal, production export/food chain support, groundwater discharge/recharge, and recreation/educational potential.

**Table 2-45. Credit Summary for the Peterson Site (Part 1 of 2)**

Targeted Mitigation Type	Projected Credit (acre)		Credit Ratio		2009 Wetland (acre)	2009 Credit (acre)		2010 Wetland (acre)	2010 Credit (acre)		2011 Wetland (acre)	2011 Credit (acre)		2013 Wetland (acre)	2013 Credit (acre)	
	USACE	CSKT	USACE	CSKT		USACE	CSKT		USACE	CSKT		USACE	CSKT		USACE	CSKT
Creation	2.14	0.64	1:1	3.36:1	2.46	2.46	0.73	2.93	2.93	0.87	3.00	3.00	0.89	1.84	1.84	0.55
Rehabilitation/secondary restoration	0.25	0.67	3.57:1 (2009) 2.50:1 (2010) 2.33:1 (2011)	1.86:1	1.25	0.35	0.67	1.25	0.50	0.67	1.25	0.54	0.67	1.25	0.59	0.67
<b>Total</b>	<b>2.39</b>	<b>1.31</b>	<b>-</b>	<b>-</b>	<b>3.71</b>	<b>2.81</b>	<b>1.40</b>	<b>4.18</b>	<b>3.43</b>	<b>1.54</b>	<b>4.25</b>	<b>3.54</b>	<b>1.56</b>	<b>3.09</b>	<b>2.43</b>	<b>1.22</b>

**Table 2-45. Credit Summary for the Peterson Site (Part 2 of 2)**

Targeted Mitigation Type	Credit Ratio		2014 Wetland (acre)	2014 Credit (acre)		2015 Wetland (acre)	2015 Credit (acre)		2016 Wetland (acre)	2016 Credit (acre)		2017 Wetland (acre)	2017 Credit (acre)	
	USACE	CSKT		USACE	CSKT		USACE	CSKT		USACE	CSKT			
Creation	1:1	3.36:1	1.84	1.84	0.55	1.95	1.95	0.58	1.95	1.95	0.58	1.95	1.95	0.58
Rehabilitation/secondary restoration	2.12:1 <sup>(a)</sup> (2013) 1.61:1 <sup>(a)</sup> (2014) 1.61:1 (2015) 1.61:1 (2016)	1.86:1	1.25	0.78	0.67	1.25	0.78	0.67	1.25	0.78	0.67	1.25	0.78	0.67
<b>Total</b>	<b>-</b>	<b>-</b>	<b>3.09</b>	<b>2.62</b>	<b>1.22</b>	<b>3.20</b>	<b>2.73</b>	<b>1.25</b>	<b>3.20</b>	<b>2.73</b>	<b>1.25</b>	<b>3.20</b>	<b>2.73</b>	<b>1.25</b>

(a) Corrected enhancement ratio.

**Table 2-46. Summary of 2004 (Baseline), 2008 Through 2011, and 2013 Through 2017 Wetland Function/Value Ratings and Functional Points at the Peterson Site**

<b>Function and Value Parameters From the 1999 MDT Montana Wetland Assessment Method</b>	<b>2004 (Baseline) (AA-1)</b>	<b>2008 (AA-1)</b>	<b>2009 (AA-1)</b>	<b>2010 (AA-1)</b>	<b>2011 (AA-1)</b>	<b>2013 (AA-1)</b>	<b>2014 (AA-1)</b>	<b>2015 (AA-1)</b>	<b>2016 (AA-1)</b>	<b>2017 (AA-1)</b>
Listed/Proposed T&E Species Habitat	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	Low (0.3)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Montana Natural Heritage Program (MTNHP) Species Habitat	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)	Low (0.1)
General Wildlife Habitat	Low (0.5)	Mod (0.7)	Mod (0.7)	Mod (0.7)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)
General Fish/Aquatic Habitat	Low (0.1)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Flood Attenuation	Low (0.2)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.5)	Mod (0.5)	High (0.8)	High (0.8)	High (0.8)
Short- and Long-Term Surface-Water Storage	Mod (0.4)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)
Sediment/Nutrient/Toxicant Removal	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (0.9)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Sediment/Shoreline Stabilization	High (0.7)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Production Export/Food Chain Support	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.8)	High (0.9)	High (0.8)	High (0.8)	High (0.8)
Groundwater Discharge/Recharge	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
Uniqueness	Low (0.2)	Low (0.3)	Low (0.3)	Mod (0.4)	Mod (0.4)	Mod (0.4)	Mod (0.6)	Mod (0.4)	Mod (0.4)	Mod (0.4)
Recreation/Education Potential	Low (0.1)	Mod (0.5)	Mod (0.5)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)	High (1.0)
<b>Actual Points/Possible Points</b>	<b>5.3/12</b>	<b>6.8/11</b>	<b>6.8/11</b>	<b>7.4/11</b>	<b>7.6/11</b>	<b>7.8/11</b>	<b>8.6/11</b>	<b>8.6/11</b>	<b>8.6/11</b>	<b>8.6/11</b>
<b>% of Possible Score Achieved</b>	<b>44%</b>	<b>61%</b>	<b>61%</b>	<b>67%</b>	<b>69%</b>	<b>71%</b>	<b>78%</b>	<b>78%</b>	<b>78%</b>	<b>78%</b>
<b>Overall Category</b>	<b>III</b>	<b>III</b>	<b>III</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>	<b>II</b>
<b>Total Acreage of Assessed Wetlands and Open Water within Easement (acres)</b>	<b>1.26</b>	<b>3.71</b>	<b>3.71</b>	<b>4.18</b>	<b>4.25</b>	<b>3.09</b>	<b>3.09</b>	<b>3.20</b>	<b>3.20</b>	<b>3.20</b>
<b>Total Functional Units (acreage × actual points) (FU)</b>	<b>6.68</b>	<b>25.23</b>	<b>25.23</b>	<b>30.93</b>	<b>32.30</b>	<b>24.10</b>	<b>26.57</b>	<b>27.52</b>	<b>27.52</b>	<b>27.52</b>
<b>Net Acreage Gain (acres)</b>	<b>N/A</b>	<b>2.45</b>	<b>2.45</b>	<b>2.92</b>	<b>2.99</b>	<b>1.83</b>	<b>1.83</b>	<b>1.94</b>	<b>1.94</b>	<b>1.94</b>
<b>Net Functional Unit Gain</b>	<b>N/A</b>	<b>18.55</b>	<b>18.55</b>	<b>24.25</b>	<b>25.62</b>	<b>17.42</b>	<b>19.89</b>	<b>20.84</b>	<b>20.84</b>	<b>20.84</b>

In 2015, the rating for structural diversity was decreased from high to moderate because the site no longer has aquatic bed habitat; instead, the site consists of emergent and scrub/shrub vegetation. This change caused slight decreases in the ratings for production export/aquatic food chain support and uniqueness. The rating for flood attenuation was increased in 2015 from the previous year's scores based on the density of the cat-tail community, which effectively functioned as woody vegetation in the way it slowed floodwaters. Despite these slight modifications, the overall functional points (8.6) were the same in 2017 as in 2016.

No quantitative performance measures or success criteria were established for this site. Created wetlands within the project corridor were expected to meet the three parameter criteria for hydrology, vegetation, and soils established for wetland determination as outlined in the 1987 Wetland Manual. All of the wetlands that were delineated within the site in 2017 met the three parameter criteria for hydrology, vegetation, and soils, which satisfied the indicated measure of success for this site.

The location of the Priority 2A noxious weed pale-yellow iris (*Iris pseudacorus*) and Priority 2B noxious weeds Canada thistle (*Cirsium arvense*), ox-eye daisy (*Leucanthemum vulgare*), and gypsy-flower (houndstongue, *Cynoglossum officinale*) that were observed during 2017 field monitoring were mapped on Figure A-3 (Appendix A). The percent cover of Canada thistle ranged from trace (<1 percent) to moderate (6–25 percent). Gypsy-flower, ox-eye daisy, and pale-yellow iris were found at trace (<1 percent) to low (1–5 percent) cover classes. Extensive weed control has been conducted on this site every year since 2009. Weed control has been conducted in July at this site each year since 2013 and occurred on May 21, 2017.

MDT was notified by the CSKT in early July 2015 that cows were in the site; based on this information, MDT visited the site and found that some fences had failed along the western boundary. A major cattle intrusion (250 cow/calf pairs) into the site required MDT staff to chase the cattle out and to make temporary repairs to the western boundary fence. In late 2015, MDT issued a contract to a local fence contractor to install new fences and gates along the southern, western, and northern boundaries of the site. This fence installation was completed in January 2016. No evidence of livestock grazing was observed within the site during the 2017 monitoring efforts.

In 2015, an increase in inundation was observed near T-1, which suggests that flow through the log crib structures in this area was being more restricted than in the previous 2 years. However, the flow through Crib Structures 1, 2, and 3 at the western end of the site was not impeded. At least four of the original log crib structures that had been constructed to mimic beaver dams have been undermined and have failed to impede water flows and spread these flows as designed across the landscape. Previous adaptive management attempts to repair the crib structures using coir bio-logs have had limited success as the identified failed structures indicate. MDT hired Robert Peccia & Associates in September 2016 to conduct an evaluation for the failing crib structures and to develop a plan to replace the failed structures. MDT has reviewed the plan and is in the process of preparing the design plans and evaluation report to the USACE and CSKT for permits to complete the fixes in 2018.

## 3.0 REFERENCES

**Berglund, J., 1999.** *MDT Montana Wetland Assessment Method*, prepared by Western EcoTech, Helena, MT, for the Montana Department of Transportation, Helena, MT, and Morrison-Maierle, Inc., Gillette, WY.

**Berglund, J. and R. McEldowney, 2008.** *MDT Montana Wetland Assessment Method*, PBS&J Project B43075.00, prepared by Post, Buckley, Schuh, & Jernigan, Helena, MT, for the Montana Department of Transportation, Helena, MT.

**Confluence Consulting, Inc., 2013.** *Silicon Mountain Aquatic Resource Mitigation Plan, Watershed #2 – Upper Clark Fork of the Columbia River, Silverbow County, MT*, CCI Project No. MDT.006, prepared by Confluence Consulting, Inc., Bozeman, MT, for the Montana Department of Transportation, Helena, MT.

**Cowardin, L. M., V. Carter, F. C. Golet, and E. T. LaRoe, 1979.** *Classification of Wetlands and Deepwater Habitats of the United States*, FWS/OBS-79-31, prepared by the US Department of the Interior, Fish and Wildlife Service, Washington, DC.

**Environmental Laboratory, 1987.** *Corps of Engineers Wetlands Delineation Manual*, Program Technical Report Y-87-1, prepared by Environmental Laboratory, Department of the Army, Waterways Experiment Station, Corps of Engineers, Vicksburg, MS, for the Department of the Army, US Army Corps of Engineers, Washington, DC.

**Montana Department of Agriculture, 2017.** “Montana Noxious Weed List,” *mt.gov*, retrieved November 7, 2017, from <http://agr.mt.gov/Portals/168/Documents/Weeds/2017%20Noxious%20Weed%20List.pdf>

**Montana Department of Transportation, 2008.** *Easton Family Ranch Wetland Mitigation Plan, Watershed #13 – Upper Yellowstone River Basin, Park County, Montana*, prepared by the Montana Department of Transportation, Helena, MT.

**US Army Corps of Engineers, 2005.** “Montana Mitigation Information,” *army.mil*, retrieved July 12, 2016, from <http://www.now.usace.army.mil/Missions/Regulatory-Program/Montana/Mitigation/>

**US Army Corps of Engineers, 2010.** *Regional Supplement to the Corps of Engineers Wetland Delineation Manual, Western Mountains, Valleys, and Coast Region (Version 2.0)*, ERDC/EI TR-10-3, J. S. Wakely, R. W. Lichvar, and C. V. Noble (eds.), prepared by the US Army Corps of Engineers, US Army Engineer Research and Development Center, Environmental Laboratory, Vicksburg, MS.

**Western Regional Climate Center, 2017a.** “Monthly Sum Precipitation at the Lennep 5 SW, Montana (244954)” *dri.edu*, retrieved September 13, 2017, from <http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?mt4954>

**Western Regional Climate Center, 2017b.** “Monthly Sum of Precipitation at Libby 30 SSE, Montana (245020)” *dri.edu*, retrieved September 13, 2017, from <http://www.wrcc.dri.edu/cgi-bin/cliMAIN.pl?mt5387>

---

# APPENDIX A

## SUMMARY INFORMATION FOR MDT WETLAND MITIGATION SITES

---

MDT Wetland Mitigation Monitoring  
2017 Executive Summary

Site	Year Built	Major Montana Watershed Basin	Pre Project Wetland Acreage & MDT Category	Target Wetland Credit	2017 Wetland / Open Water Acreage and MDT Category	Upland Acreage, Ratio	Total Acreage Credit and Functional Unit as of 2017	SITE NOTES:
<b>MISSOULA DISTRICT:</b>								
McGinnis Meadows Libby	2009	1- Kootenai River	20.14 ac Category III	16.33 ac	26.4 ac Category I / II	2.20 ac 5:1	Creation - 8.6 ac Enhancement - 0.3 ac Rehabilitation - 11.07 ac Preservation - 0.08 ac Upland Buffer - 0.44 ac 223.76 FU	2017 was the eighth monitoring event. Goals for the site included the restoration of 0.8 acres of riparian/stream habitat in McGinnis Creek, rehabilitation of 17.3 acres of degraded wetlands, creation of 2.9 acres of emergent wetlands, enhancement of 1.74 acres of emergent wetland, preservation of 0.3 acres of existing riparian communities along the abandoned McGinnis Creek corridor, and protection of 2.2 acres of upland buffer. See report for full credit breakdown. This site yielded 20.48 credit acres in 2017.
Schrieber Meadows South of Libby	Pilot - 2007 Full site - 2011	1- Kootenai River	13.22 ac Category Unknown	17.84 ac	39.11 ac Category I / I / I	12.39 ac 5:1	Creation - 22.4 ac Enhancement - 4.41 ac Restoration - 2.31 ac Upland Buffer - 2.48 ac 351.99 FU	2017 was the seventh monitoring event for the area of the pilot project, and the sixth monitoring event for the balance of the project which was completed in 2011. In addition to wetland credit acres, 35,551 stream credits are anticipated for this site. This site yielded 31.54 wetland credit acres and a total of 35,551 stream mitigation credits in 2017.
Schrieber Lake South of Libby	2014	1- Kootenai River	40.08 ac	13.40 ac	37.7 ac Category I	3.81 ac 5:1	Creation - 4.8 Restoration - 1.62 Enhancement - 1.59 Preservation - 6.42 Upland Buffer - 0.76 496.32 FU	2017 was the third monitoring event for the project area. Goals for the site included the creation of 3.06 acres, restoration of 2.53 acres, enhancement of 4.53 acres, and the preservation of 25.6 acres. This site yielded 15.17 wetland credit acres and a total of 5,059 acres of riparian credits and 13,071 stream restoration credits in 2017. Schrieber Lake is not included in the crediting scheme or totals.
US 93 North – Peterson North of St Ignatius	2006	3- Lower Clark Fork	1.26ac Category III 6.68 FU	USACE - 2.39 ac CSKT - 1.31 ac	3.2 ac Category II	NA	USACE - 2.73 ac CSKT - 1.25 ac 20.84 FU	2017 was the ninth monitoring event. Substantial decline in wetland area and credit acres were documented between 2011 and 2013. Failure of log crib structures to impound water coupled with two years of drought were strong contributing factors. Credit is considered interim pending satisfaction of ultimate (end of monitoring period) performance standards. See report for full credit breakdown. This site yielded 1.25 CSKT credit acres and 2.73 USACE credit acres in 2017. Repair of log cribs proposed in 2018.
<b>BUTTE DISTRICT:</b>								
Easton Wilsall	2009	13- Upper Yellowstone	1.10 ac	27.41 ac	Create - 9.79 ac Category III Preserve - 1.10 ac Category II Restore - 1.56 ac Category III	11.5 ac 5:1	Preservation - 0.28 ac Re-establishment - 1.56 ac Creation - 9.79 ac Upland Buffer - 2.3 ac 72.84 FU	2017 was the eighth monitoring year. The project goal was to create 24.95 acres of palustrine, emergent and shrub/scrub wetlands, re-establish 1.56 acres of flood channel, preserve 1.10 acres of pre-existing wetland, and maintain 6.43 acres of upland buffer. This site yielded a total of 13.26 credit acres in 2017 which is an increase of 0.45 acre from 2016.
Silicon Mountain Silver Bow	2014	2 – Upper Clark Fork of the Columbia River	10.06 ac Category III	11.45 ac	17.10 ac Category III	10.8 ac 5:1	Create - 6.3 ac Preserve - 10.3 ac Restoration - 0.50 ac 95.38 FU	2017 was the third monitoring event for the project area. Anticipated wetland credit acres included 6.77 acres of creation and 10.06 of preservation. Anticipated stream and riparian mitigation credits is 12,369.5. In 2017 the site yielded 11.36 wetland credit acres and 12,369.5 stream mitigation credits.
Rostad Ranch Martinsdale	2012	10- Musselshell River	3.4 ac Category III	39.7 ac	26.42 ac Category III	6.76 ac 5:1	Creation - 10.74 ac Re-establishment - 14.62 ac Restoration - 0.54 ac Preservation - 0.06 ac Upland Buffer - 1.35 ac 159.85 FU	2017 was the fifth monitoring year. The Rostad Ranch Mitigation Plan included the re-establishment of 27.11 acres, rehabilitation of 2.63 wetland acres, creation of 9.84 acres, preservation of 0.25 acres, and maintenance of a 6.76-acre upland buffer. This site yielded a total of 26.42 credit acres in 2017 following adaptive management implemented at the site in the spring 2017.

Site	Year Built	Major Montana Watershed Basin	Pre Project Wetland Acreage & MDT Category	Target Wetland Credit	2017 Wetland / Open Water Acreage and MDT Category	Upland Acreage, Ratio	Total Acreage Credit and Functional Unit as of 2017	SITE NOTES:
<b>GLENDIVE DISTRICT:</b>								
Fort Peck - Northeast Valley County	Constructed 2015	12- Lower Missouri	0 ac	3.41 ac	2.9 ac Category III	1.6 ac 5:1	Created - 2.9 ac Upland Buffer - 0.32 ac Total - 3.22 ac 9.57 FU	The 2017 monitoring was the first annual monitoring event following construction of the site in the fall of 2015. The site is intended to provide 3.41 acres of compensatory wetland mitigation credits for wetland impacts associated with the Fort Peck – Northeast highway reconstruction project and to serve as a mitigation bank for future transportation projects in Watershed #12 – Lower Missouri River. The site yielded 3.22 credit acres in 2017.
Big Muddy Culbertson	2011	12- Lower Missouri	0.73 ac Category II/III	7.83 to 9.32 ac	<u>North Parcel</u> Preserve - 0.73 ac Category III Create - 7.39 ac Category II  <u>South Parcel</u> Preserve - 1.83 ac Category III Create - 4.17 ac Category III	<u>North Parcel</u> 2.5 ac 5:1  <u>South Parcel</u> 1.25 ac 5:1	<u>North Parcel</u> Creation - 7.39 ac Preservation - 0.18 ac Upland Buffer - 0.5 ac 57.3FU  <u>South Parcel</u> Creation - 4.17 ac Preservation - 0.46 ac Upland Buffer - 0.25 ac 36.05 FU  Total - 12.95 ac	2017 was the sixth monitoring year at the south parcel and seventh year at the north parcel. Wetlands developed at this site were to provide compensatory mitigation for impacts within the Glendive District including Brockton-East and Big Muddy-West. Total estimated credit acreage in 2017 was 8.07 credits for the North parcel and 4.88 credits for the South parcel, for a total of 12.95 credits site-wide. Credit estimates are pro-rated, scaled by estimated percent completion of performance standards.
Forsyth NW - East Forsyth	2012	14 - Middle Yellowstone	0 ac	1.07 ac	0.43 ac Category III	2.31 ac 5:1	Creation - 0.43 ac Upland Buffer - 0.46 ac	2017 was the fifth monitoring year. Together the four Forsyth NW project sites are intended to provide 8.98 acres to compensate for impacts from the Volborg – N & S and Forsyth – Northwest highway projects. The site yielded 0.89 credit acres in 2017.
Forsyth NW - Middle Forsyth	2012	14 - Middle Yellowstone	0 ac	0.34 ac	0.58 ac Category III	1.22 ac 5:1	Creation - 0.58 ac Upland Buffer - 0.24	2017 was the fifth monitoring year. Together the four Forsyth NW project sites are intended to provide 8.98 acres to compensate for impacts from the Volborg – N & S and Forsyth – Northwest highway projects. The site yielded 0.82 credit acres in 2017.
Forsyth NW - West Forsyth	2012	14 - Middle Yellowstone	1.29 ac	10.38 ac	5.89 ac Category III	7.8 ac 5:1	Creation - 4.60 ac Preservation - 0.32 ac Upland Buffer - 1.56 ac	2017 was the fifth monitoring year. Together the four Forsyth NW project sites are intended to provide 8.98 acres to compensate for impacts from the Volborg – N & S and Forsyth – Northwest highway projects. The site yielded 6.48 credit acres in 2017.
Forsyth NW - Treasure County Line Forsyth	1999	14 - Middle Yellowstone	0 ac	1.78 ac	1.74 ac Category III	4.15 ac 5:1	Creation - 1.74 ac Upland Buffer - 0.83 ac	2017 was the fifth monitoring year. Together the four Forsyth NW project sites are intended to provide 8.98 acres to compensate for impacts from the Volborg – N & S and Forsyth – Northwest highway projects. The site yielded 2.57 credit acres in 2017.
<b>BILLINGS DISTRICT:</b>								
Kindsfater Wetland Laurel	2012	13- Upper Yellowstone	25.9 ac	32.7 ac As ultimately constructed	33.4 ac Category III	22.6 ac 5:1	Creation - 2.0 ac Re-establishment - 6.8 ac Rehabilitation - 0.7 ac Enhancement - 1.0 ac Preservation - 5.1ac Upland Buffer - 4.52 ac 172.36 FU	2017 was the fifth monitoring year. The project is intended to provide before-the-fact mitigation credits for proposed projects in Watershed 13. The site yielded 20.1 credit acres in 2017.
JTX Tunnickliff Hardin	2015/16	13- Upper Yellowstone	0.03 ac	29.6 ac	3.86 ac Category III	13.32 ac 5:1	Establishment - 3.86 ac Re-establishment - 0.47 ac Preservation - 0.03 ac Upland Buffer - 2.66 ac 15.3 FU	2017 was the second monitoring year following construction in late 2015 and early 2016. At the time of the 2017 monitoring, the site had developed 3.86 acres of emergent wetland to go along with 0.03 acres of existing wetland for a total of 3.89 acres across the site. The site was designed and constructed with the intent to provide 29.6 wetland credit acres.